


masibus[®]

Advanced Automation - Sure Solutions

new **1008S & 1006H**
Flow Indicators/ Totalizers

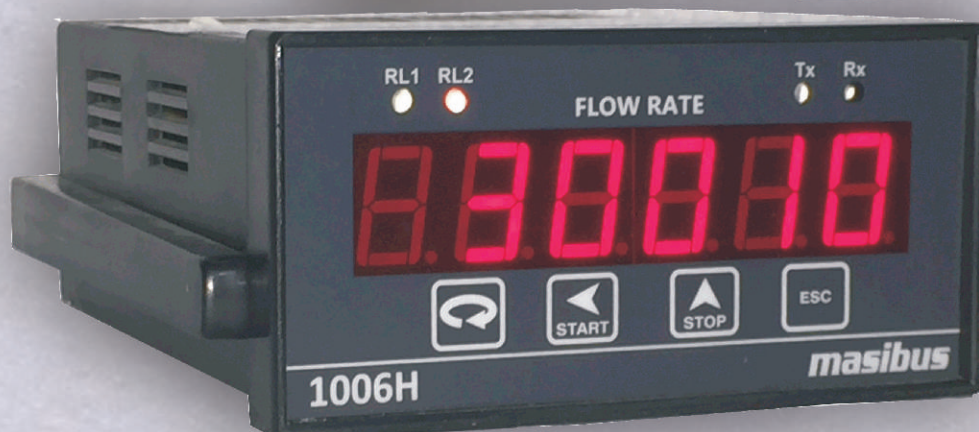

MASIBUS AUTOMATION AND INSTRUMENTATION PVT. LTD.

E-mail: sales@masibus.com Web: www.masibus.com

Tel.: +91 79 23287275 - 79 Fax: +91 79 23287281

WHY CHOOSE 1008S!

MASIBUS FLOW INDICATOR TOTALIZER COMPARISON CHART

SPECIFICATION / FEATURE	NEW 1008S	LEGACY 1006	COMPACT 1006H
Process Value Digits	5	4	N/A
Total / Integration Value Digits	8	6	6
Rate Indication Range (Programmable)	0-30000	0-9999	0-30000
Measurement Accuracy for Input Signal (Current & Voltage)	±0.025% of F.S	±0.25% of F.S ± 1 Digit	±0.25% of F.S ± 1 Digit
Standard Power Supply	85 to 265VAC	207 to 253VAC	110 to 230VAC
Low Flow Cut-Off facility	✓	✗	✓
Nos. of Relays (Optional)	4	2	2
Simultaneous Flow and Batch Relay facility	✓	✗	✓
Nos. of Digital Input	4 (optional)	1 (optional)	1 (standard)
Digital Filter Option	✓	✗	✓
Pulse Output facility (Optional)	✓	✗	✗
0-10VDC Input facility	✓	✗	✓
Conversion Factor Range	0.00 to 99.99	0.50 to 99.99	0.00 to 99.99
2 nd and 3 rd Input / Mass Flow measurement (Optional)	✓	✗	✗
Design Age	Modern Design	25 year old design	Modern Design
Dimensions (mm) H X W X D (with Terminals)	More Compact 96 X 96 X 130	Larger 96 X 96 X 175	Horizontal 48 X 96 X 110
Weight (Approx.)	Lighter 500 gm	Heavier 2000 gm	Lighter 300 gm

Information is for comparison purpose only. For more Information please request for product catalogues
E-mail: sales@masibus.com