

Motor starters

EasyPact TVS

The easy choice for simplicity & flexibility



> Innovative > Reliable > Simple

Schneider
Electric™



Schneider Electric™ Worldwide

22.4

billion sales in 2011 (in €)



39

% of sales in new economies



1 300 000+

people in 100+ countries



394

Rank in Fortune 500 ranking



4-5%

Revenue devoted to R&D



Schneider Electric™ in india*

17000+

Employees



31

Global Manufacturing Plants



10+

Distribution Centres



500+

Authorised Partners: Distributors,
System Integrators, Panel Builders



1000+

R&D engineers in Bangalore



1

Regional Project &
Engineering Centre



*Figures as on April 2012



TeSys E has helped our customers with a value system focused on **Safety, Simplicity & Reliability**.

Schneider Electric has always believed in customer satisfaction and ensures that we renovate our offers to meet the changing needs of our customers.

Now Schneider Electric is happy to announce that

+ **TeSys E** is now **EasyPact TVS**
More Safe, Simple & Reliable

A global environment friendly range from Schneider Electric.

EasyPact TVS

The easy choice for simplicity & flexibility






Environmentally responsible

- > EasyPact TVS is part of the Schneider Electric energy efficiency approach. Designed for easy disassembly and recycling at end of life, EasyPact TVS complies with environmental directives RoHS* and WEEE**, and with ISO 14001 standards, thanks to non-polluting factories.

Schneider Electric fully takes into account environmental requirements, starting right from the design phase of every product through to the end of its service life:

- > the materials used for EasyPact TVS are not potentially dangerous to the environment
- > the production facilities are non-polluting in compliance with the ISO 14001 standard
- > the energy dissipated per pole is low, making energy losses insignificant
- > the materials are marked to facilitate sorting for recycling at the end of product service life.

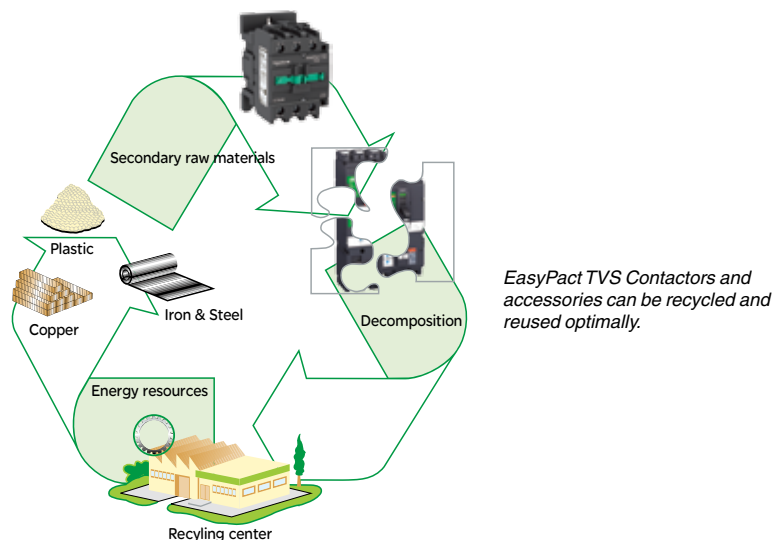

* RoHS = Restriction of Hazardous Substances
 ** WEEE = Waste Electrical and Electronic Equipment



EasyPact TVS is...Reliable

Conforms to IEC 60947-1 for contactors



- > CPRI Tested Type 2 Co-ordination chart with fuse/fuse less available
- > Complete Range with CE Marking

High electrical & Mechanical endurance



- > 10 Million mechanical operations for entire range
- > 1.4 Million electrical operations for 9-12 Amp

Reliable Accessories

- > Auxiliary Contact Blocks
- > Mechanical Interlock
- > RC switch Suppressor



Coil voltage code

		24	48	110	220	240	380	415	440
LC1E06-300	50 Hz	B5	E5	F5	M5	U5	Q5	N5	R5
	60 Hz	B6	-	F6	M6	-	Q6	-	R6
LC1E400-630	50/60Hz	-	E7	F7	M7	U7	Q7	N7	-

Contactor: how to determine the full commercial reference ?

Example:

LC1E	12	10	U	5		ref. LC1E1210U5
					5	50 Hz
						Coil voltage code 240 V
						Auxiliary contact configuration (2) 01 1NC 10 1NO N/A 1NO+1NC
						Rated operation current AC3 12 A
						Contactor EasyPact TVS

Example 1: you need a 32 A contactor, 1 NC auxiliary contact, 24 V - 50 Hz coil ⇒ LC1E3201B5

Example 2: you need a 120 A contactor, 1 NC + NO auxiliary contact, 220 V - 50 Hz coil ⇒ LC1E120M5

(2) Only up to LC1E38.

EasyPact TVS is...Simple

- > New AC-3 rating of 6 Amp
- > TVS stands for TeSys Value System


Schneider Electric has a rich experience in control gear having installed base world wide (more than 100 countries)



Motor Starters

EasyPact TVS

The easy choice for simplicity & flexibility

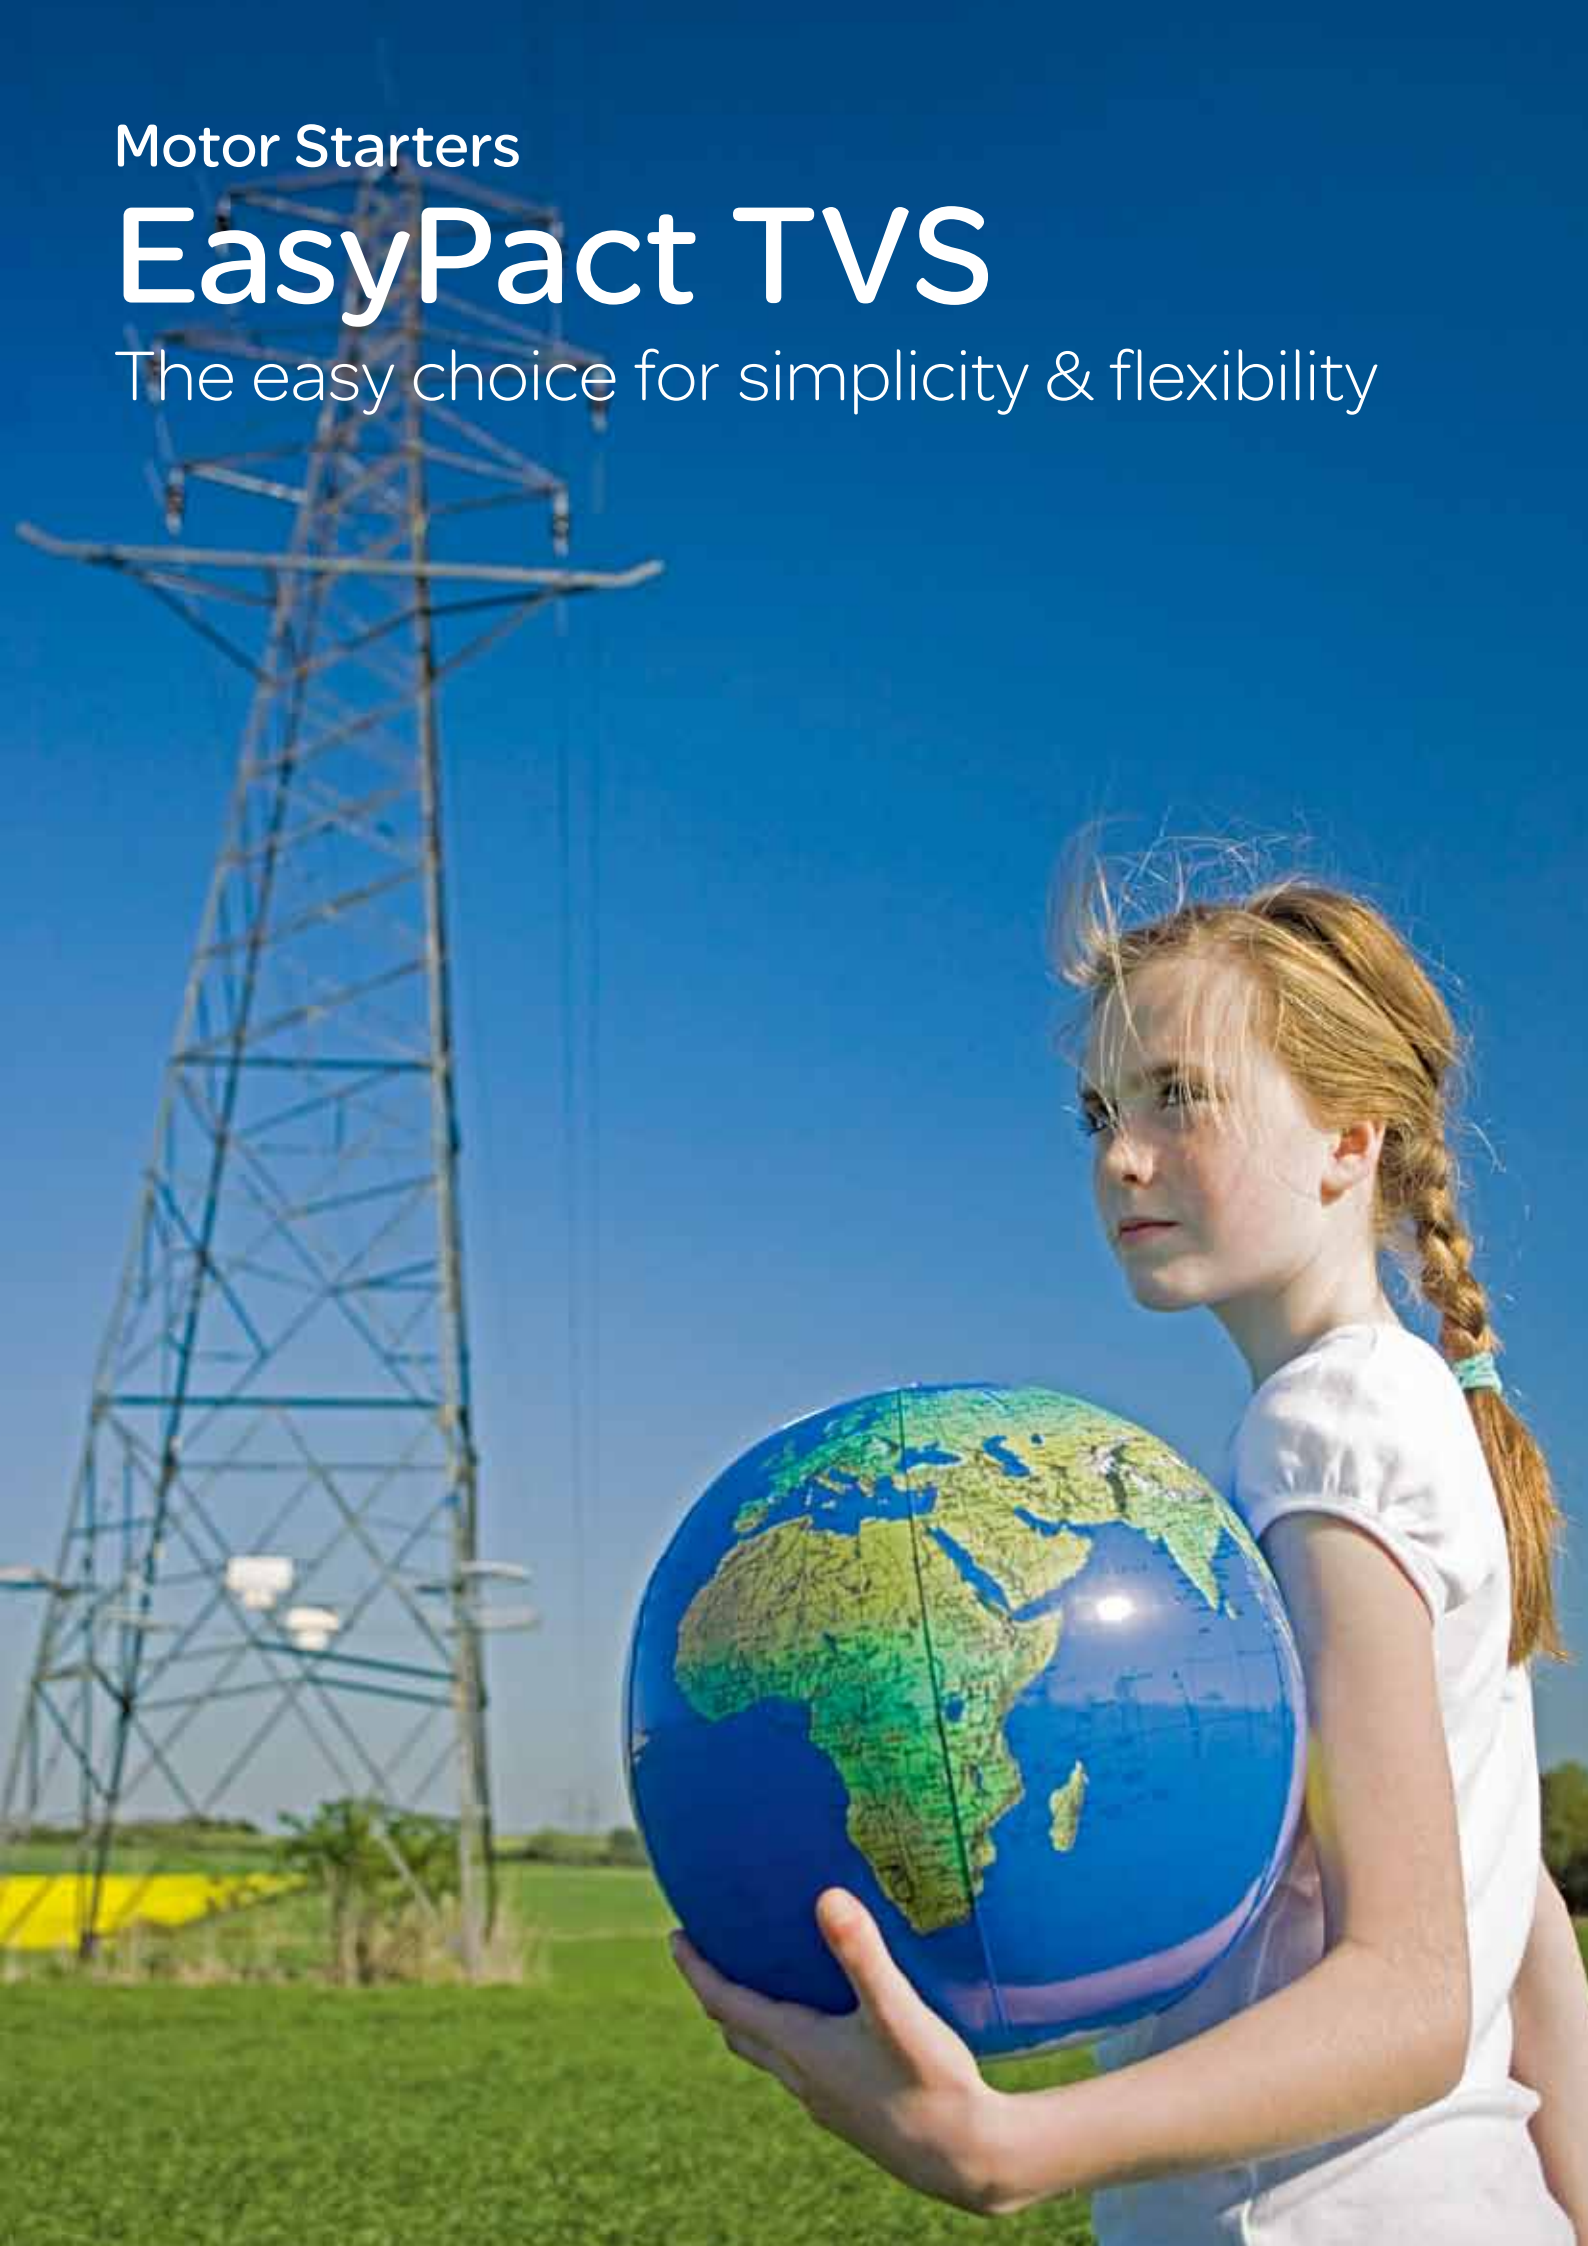

EasyPact TVS: control & protection,



Leader in the motor starter market for more than 80 years, Schneider Electric has designed EasyPact TVS range to provide you with the competitive solutions you were expecting.

EasyPact TVS starters range is the perfect fit between quality, features and price.



A cost-effective offer

- > The best price for the performance and quality level you need.
- > A maximum of solutions with an optimal number of products.
- > Designed to perform the essential starter's functions: control and overload protection.



Simple and intuitive

- > Easy to install.
- > Covering 80 % of applications.
- > With the key accessories to easily build lots of Do-It-Yourself solutions.
- > With an intuitive commercial references system: easy to order, easy to understand and easy to remember.



Guaranteed availability

- > Available in distribution.
- > EasyPact TVS fully benefits from Schneider Electric world wide policies: in terms of standards of production, distribution, quality, availability, services and after-sales support.



in a simple way



Energy & Infrastructure



Industry





Buildings

Circuit protection



EasyPact TVS offer *Power control & protection* *Circuit control*

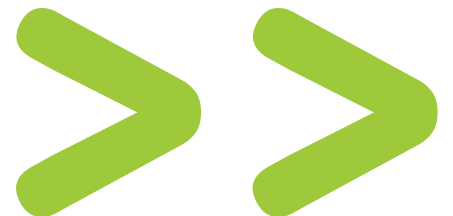

EasyPact TVS: contactors



> EasyPact TVS contactors,
6 A to 630 A



> EasyPact TVS thermal overload relays
0.1 A to 630 A



> EasyPact TVS control relays
4 NO/NC contacts



> EasyPact TVS motor protection circuit
breaker 0.1A to 32A



> Coordination between protection
and control components

> Glossary, definitions, technical
information

and relays

Control your motors, Do It Yourself simply your solution:
direct-on-line starter, reversing starter, star-delta starter



Characteristics

Accessories, spare parts

Dimensions and mounting

Footprint for complete compatibility with contactors
(direct mounting under contactors)



Characteristics

Dimensions and mounting

Pilot your control circuits



Characteristics

Accessories

Dimensions and mounting

Complete Motor Protection



Characteristics

References

Dimensions and mounting

Better continuity of service



What coordination means

Type 2 Co-ordination charts

Glossary

Definitions

Technical information



Solution to meet Customer needs

>> Global offer, Conformity to IEC 60947-4-1 & CE marking



>> High operational ambient temperature: upto 60°C



>> Reliability with tested Fuse less / Fuse Type 2 co-ordination



>> High electrical and mechanical life



>> Wide variety of accessories for simple adaptation



EasyPact TVS 3 pole contactors



Size		1						2		3		
Rated operational current AC-3	A	6	9	12	18	25	32	38	40	50	65	
	A	20	25		32	36	50		60	70	80	
Rated operational power in AC-3	220/230 V	1.1	2.2	3	4	5.5	7.5	9	11	15	18.5	
	380/400 V	2.2	4	5.5	7.5	11	15	18.5	18.5	22	30	
	415/440 V	2.2	4	5.5	9	11	15	18.5	22	25/30	37	
	500 V	3	5.5	7.5	10	15	18.5	18.5	22	30	37	
	660/690 V	3	5.5	7.5	10	15	18.5	18.5	30	33	37	
Width	mm	45						56		75		
Coil rated operating voltage		24...440 V AC according to the coil voltage code (see below)										
Auxiliary built in contact		1 NO or 1 NC						1 NO + 1 NC				
References ⁽¹⁾		LC1E06	LC1E09	LC1E12	LC1E18	LC1E25	LC1E32	LC1E38	LC1E40	LC1E50	LC1E65	

(1) Partial, see below.

Coil voltage code

		24	48	110	220	240	380	415	440
LC1E06-300	50 Hz	B5	E5	F5	M5	U5	Q5	N5	R5
	60 Hz	B6	-	F6	M6	-	Q6	-	R6
LC1E400-630	50/60Hz	-	E7	F7	M7	U7	Q7	N7	-

Contactors: how to determine the full commercial reference ?

Example:


LC1E	12	10	U	5		ref. LC1E1210U5
					5	50 Hz
						Coil voltage code
						240 V
						Auxiliary contact configuration ⁽²⁾
						01 1NC
						10 1NO
						N/A 1NO+1NC
						Rated operation current AC3
						12 A
						Contactor
						EasyPact TVS

Example 1: you need a 32 A contactor, 1 NC auxiliary contact, 24 V - 50 Hz coil ⇒ LC1E3201B5

Example 2: you need a 120 A contactor, 1 NC + NO auxiliary contact, 220 V - 50 Hz coil ⇒ LC1E120M5

(2) Only up to LC1E38.

from 6 to 630 A

													
4		5		6		7		8		9			
80	95	120	160	200	250	300	400*	500*	630*				
110	120	150	200	250	300	320	500	700	1000				
22	25	37	45	55	75	90	110	147	185				
37	45	55	75	90	132	160	200	250	335				
45	45	59	80	100	140	160/185	220/250	280/295	375/400				
45	55	75	90	110	160	200	257	355	400				
45	45	80	100	110	160	220	280	335	450				
85		120		168.5		213		213		233		309	
1 NO + 1 NC		-		-		-		-		-		-	
LC1E80	LC1E95	LC1E120	LC1E160	LC1E200	LC1E250	LC1E300	LC1E400	LC1E500	LC1E630				

Common characteristics

> Contactors compatible with:



LAEN● auxiliary contact blocks



LAETSD time delay auxiliary contact (from 25 A contactor)



LAERC●● RC switch suppressor (up to 95 A)



LAEM● mechanical interlock

Utilisation categories

- > Class AC-1: AC loads with $\cos \varphi$ at least equal to 0.95 (resistive load, heating, distribution, etc.).
- > Class AC-3: squirrel-cage motors with breaking taking place with the motor running.

* above 400A will be available from Q2 2013

EasyPact TVS contactors

6 to 630 A

Power characteristics

Power circuit connections				LC1E06	LC1E09	LC1E12	LC1E18	
Contactor type								
Number of poles					3			
Rated operational current (Ie) (Ue 440 V)	In AC-3 (θ 60 C)	A		6	9	12	18	
	In AC-3 (θ 55 C)							
	In AC-1 (θ 60 C)		20	25		32		
	In AC-1 (θ 40 C)							
Rated operational voltage (Ue)		Up to	V	690				
Frequency limits		Of the operational current	Hz	50/60				
Conventional thermal current (Ith)	θ 60 C	A		20	25		32	
	θ 40 C							
Rated breaking capacity at 440 V		Conforming to IEC 60947	A	48	72	96	144	
Rated making capacity at 440 V		Conforming to IEC 60947-4-1	A	60	90	120	180	
Permissible short time rating No current flowing for preceding 15 minutes with θ 40 C	10 s	A		80	105		145	
	1 min		45	61		84		
	10 min		20	30		40		
Maximum permissive current No current flowing for previous 60 minutes, at θ 40 C		For 10 s	A	-				
Protection by fuses against short-circuits (U 690 V)	Without thermal overload relay gG fuse	Type 1	A	12	20	25	35	
	With thermal overload relay			For corresponding aM or gG fuse ratings corresponding to the associated LRE thermal overload relay, please see page 33				
Average impedance per pole		At Ith and 50 Hz	mΩ	2.5				
Power dissipation per pole for the above operational currents	AC-3	W		0.09	0.20	0.36	0.81	
	AC-1		1.0	1.6		2.6		
Electrical durability	AC-3 (Ue 440 V)	Million cycles		1.4			1.2	
	AC-1 (Ue 440 V)		0.15		0.3			
	AC-4 (Ue 440 V)		0.04			0.035		
Mechanical durability				10				

Power circuit connections			
Connection maximum c.s.a.			
Flexible cable with cable end	1 conductor	mm ²	1...4
	2 conductors		1...2.5
Solid cable without cable end	1 conductor	mm ²	1...4
	2 conductors		1...4
Cable with lug		mm	-
Bar	Number of bars		-
	Bar	mm x mm	-
Bolt diameter	1 conductor	mm	-
Tightening torque	Power circuit connection	N.m	1.2
Tool			Phillips N 2 or Ø6mm flat

LC1E25	LC1E32	LC1E38	LC1E40	LC1E50	LC1E65	LC1E80	LC1E95	LC1E120	LC1E160	LC1E200	LC1E250	LC1E300	LC1E400 *	LC1E500 *	LC1E630 *
25	32	38	40	50	65	80	95	-							
								120	160	200	250	300	400	500	630
36	50		60	70	80	110	120	-							
								150	200	250	300	320	500	700	1000
36	50		60	70	80	110	120	-							
								150	200	250	300	320	500	700	1000
200	256	304	320	400	520	640	760	960	1280	1600	2000	2400	3200	4000	5040
250	320	380	400	500	650	800	950	1200	1600	2000	2500	3000	4000	5000	6300
240	260	310	320	400	520	640	800	-							
120	138	150	165	208	260	320	400	-							
50	60		72	84	110	135		-							
								1100	1400	1500	1800	2200	3600	4200	5050
40	63		80	100	125	160		250	315			500	630	800	800
								-							
2.5			1.5		1	0.8		0.6		0.33	0.32	0.3	0.26	0.18	0.12
1.6	2.0	2.9	2.4	3.8	4.2	5.1	7.2	8.6	15	13	20	27	42	45	48
3.2	5.0		5.4	7.4	6.4	9.7	12	14	24	21	29	31	65	88	120
	1	0.9						0.8					0.6	0.6	0.6
0.35								0.25					0.25	0.25	0.2
	0.03	0.025						0.012	0.007	0.006	0.005		0.005	0.005	0.005
	8	5			3			4		5			4	4	4
1...6			2.5...25		4...50		10...120								
1...4			2.5...10		4...16		10...120 + 10...50								
			2.5...25		4...50		10...120								
			2.5...16		4...50		10...120 + 10...50								
								150	185	240	2 x 150	2 x 240	-		
								2							
								3 x 25	4 x 32	5 x 30	30 x 5	40 x 5	60 x 5		
								M8	M10					M12	
1.5	2.1		5		9		12	18	35					58	
			Ø8mm flat		Ø8mm flat or Allen key n 4		Allen key n 4		Wrench						

* above 400A will be available from Q2 2013

EasyPact TVS contactors

6 to 630 A

Control circuit: coil characteristics

Built in auxiliary contact

Control circuit: coil characteristics with a.c. supply

Contactor type		LC1E06	LC1E09	LC1E12	LC1E18
Rated control circuit voltage (Uc) 50/60 Hz	V	24...440 according coil voltage code			
Control voltage limits (θ 55 C)					
50 Hz or 60 Hz coils Operational		0.85...1.1 Uc			
Drop-out		0.3...0.6 Uc			
Average consumption at 20 C and at Uc					
~ 50 Hz coils Inrush	coil VA	95			
	cos φ	0.75			
Sealed	coil VA	8.5			
	cos φ	0.3			
~ 60 Hz coils Inrush	coil VA	95			
	cos φ	0.75			
Sealed	coil VA	8.5			
	cos φ	0.3			
Heat dissipation	W	2.3			
Operating time					
Closing "C"	ms	12...22			
Opening "O"		4...19			
Electrical durability (AC-3)					
AC-3 (Ue 440 V)	In millions of operating cycles	1.2...1.4			
AC-1 (Ue 440 V)		-			
Mechanical durability at Uc		10			
Maximum operating rate at ambient temperature 60 C	In operating cycles per hour	1800			
Maximum operating rate at ambient temperature 55 C		-			

Control circuit connections

Connection maximum c.s.a.				
Flexible cable without cable end	1 or 2 conductors	mm ²	1...4	
Flexible cable with cable end	1 conductor	mm ²	1...4	
	2 conductors		1...2.5	
Solid cable without cable end	1 or 2 conductors	mm ²	1...4	
Tightening torque		N.m	1.2	
Screwdriver			Philips N 2 - Ø6 mm flat	


Built in auxiliary contact

Contacts conforming to	IEC 60947-5-1		LC1E06...E38: contactor's own 1NO or 1NC LC1E40...E160: contactor's own 1NO and 1NC	
Rated operational voltage (Ue)	Up to	V	690	
Rated insulation voltage (Ui)	Conforming to IEC 60947-1		690	
Conventional thermal current (Ith)	Ambient air temperature 60 C	A	10	
Operating current frequency		Hz	50/60 Hz	
Minimum switching capacity λ = 10 ⁻⁸	U min	V	17	
	I min	mA	5	
Short-circuit protection	Conforming to IEC 60947-5-1		gG fuse: 10 A	
Raked making capacity	Conforming to IEC 60947-5-1	A	~: 140	
Short-time rating	Permissible for	1 s	100	
		500 ms	120	
		100 ms	140	
Insulation resistance		MΩ	>10	
Non-overlap time	Guaranteed between N/C and N/O contacts	ms	1.5 on energisation and on de-energisation	

EasyPact TVS contactors

6 to 630 A

Environment

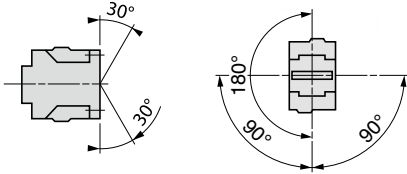Contactor type			LC1E06...E18	LC1E25...E38
Rated insulation voltage (Ui)	Conforming to IEC 60947-4-1, overvoltage category III, degree of pollution: 3	V	690	
Rated impulse withstand voltage (Uimp)	Conforming to IEC 60947	kV	6	
Conforming to standards			IEC 60947-4-1, IEC 60947-5-1	
Product certifications			GOST	
Degree of protection	Conforming to IEC 60529		IP20	
Protective treatment	Conforming to IEC 60068		"TH"	
Ambiant air temperature around the device	Storage	°C	-60...+80	
	Operation		-5...+55	
	Permissible at UC		-20...+70	
Maximum operating altitude	Without derating	m	3000	
Operating positions	Without derating		±30 in relation to normal vertical mounting plane 	
Flame resistance	Conforming to IEC 60695-2-1	°C	850 C	
Shock resistance ⁽¹⁾ 1/2 sinewave = 11 ms	Contactor open		7 gn	6 gn
	Contactor closed		10 gn	
Vibration resistance ⁽¹⁾ 5...300 Hz	Contactor open		1.5 gn	
	Contactor closed		3 gn	

(1) Without change of contact states, in the most unfavorable direction (coil energised at Ue).


LC1E40...E65	LC1E80...E95	LC1E120...E160	LC1E200...E300	LC1E400*	LC1E500*	LC1E630*
--------------	--------------	----------------	----------------	----------	----------	----------

8

IEC 60947-4-1

IP00

-

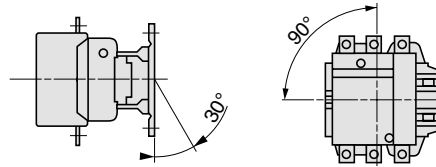

7 gn

6gn	9gn	6gn
15gn		
1.5gn	2gn	
5gn	4gn	

* above 400A will be available from Q2 2013

EasyPact TVS contactors

EasyPact TVS contactors for motor control up to 375 kW at 415 V, in category AC-3



3-pole contactors						Rated operational current in AC-3 440 V up to	Instantaneous auxiliary contacts		Basic reference, to be completed by adding the control voltage code	Weight	
220 V	380 V	230 V	400 V	415 V	500 V		500 V	690 V			Fixing ⁽¹⁾
						kW	kW	kW	kW	A	kg
Connection by screw clamp terminals											
1.1	2.2	2.2	3	3	6	1	0	LC1E0610●●	0.300		
1.1	2.2	2.2	3	3	6	0	1	LC1E0601●●	0.300		
2.2	4	4	5.5	5.5	9	1	0	LC1E0910●●	0.300		
2.2	4	4	5.5	5.5	9	0	1	LC1E0901●●	0.300		
3	5.5	5.5	7.5	7.5	12	1	0	LC1E1210●●	0.300		
3	5.5	5.5	7.5	7.5	12	0	1	LC1E1201●●	0.300		
4	7.5	9	10	10	18	1	0	LC1E1810●●	0.300		
4	7.5	9	10	10	18	0	1	LC1E1801●●	0.300		
5.5	11	11	15	15	25	1	0	LC1E2510●●	0.360		
5.5	11	11	15	15	25	0	1	LC1E2501●●	0.360		
7.5	15	15	18.5	18.5	32	1	0	LC1E3210●●	0.450		
7.5	15	15	18.5	18.5	32	0	1	LC1E3201●●	0.450		
9	18.5	18.5	18.5	18.5	38	1	0	LC1E3810●●	0.450		
9	18.5	18.5	18.5	18.5	38	0	1	LC1E3801●●	0.450		
11	18.5	22	22	30	40	1	1	LC1E40●●	0.980		
15	22	25/30	30	33	50	1	1	LC1E50●●	0.980		
18.5	30	37	37	37	65	1	1	LC1E65●●	0.980		
22	37	45	45	45	80	1	1	LC1E80●●	1.520		
25	45	45	55	45	95	1	1	LC1E95●●	1.520		
37	55	59	75	80	120	1	1	LC1E120●●	2.300		
45	75	80	90	100	160	1	1	LC1E160●●	2.300		
Connection by bars											
55	90	100	110	110	200	0	0	LC1E200●●	4.600		
75	132	140	160	160	250	0	0	LC1E250●●	4.700		
90	160	160/185	200	220	300	0	0	LC1E300●●	8.500		
110	200	220/250	257	280	400	0	0	LC1E400●●	9.1		
147	250	280/295	355	335	500	0	0	LC1E500●●	11.35		
185	335	375/400	400	450	630	0	0	LC1E630●●	18.6		

Control voltage code									
	Volts	24	48	110	220	240	380	415	440
LC1E06-300	50 Hz	B5	E5	F5	M5	U5	Q5	N5	R5
	60 Hz	B6	-	F6	M6	-	Q6	-	R6
LC1E400-630	50/60Hz	-	E7	F7	M7	U7	Q7	N7	-

Separate components

Auxiliary contact blocks, add-on modules and accessories, see pages 18 to 19.

Coil spare parts

For maintenance, each coil can be ordered separately, see page 20 to 24.

(1) LC1E06 to E65: clip-on mounting on 35 mm rail AM1 DP or screw fixing.
 LC1E80 to E95: clip-on mounting on 35 mm rail AM1DP or 75 mm rail AM1 DL or screw fixing.
 LC1E120 and E160: clip-on mounting on 2 x 35 mm rail AM1 DP or screw fixing.

EasyPact TVS contactors

New Wide Band Coil contactors up to 38A

- > Complete range of contactors & OLR up to 300A with standard coil
- > Contactors up to 38A with Wide Band Coils
- > Confirming to IEC 60947-4-1
- > CE marking
- > Ambient Temperature upto 60 C
- > Type 2 coordination Charts available
- > Wide variety of accessories

Power characteristics								
Contactor type			LC1E09*#	LC1E12*#	LC1E18*#	LC1E25*#	LC1E32*#	LC1E38*#
Number of poles			3					
Rated operational current (Ie) (Ue 440 V)	In AC-3 (θ<60 C)	A	9	12	18	25	32	38
	In AC-1 (θ<60 C)	A	25		32	36	50	
Rated operational voltage (Ue)	Up to	V	690					
Frequency limits	Of the operational current	Hz	50/60					
Rated breaking capacity at 440V	Conforming to IEC 60947-4-1	A	72	96	144	200	256	304
Rated making capacity at 440V	Conforming to IEC 60947-4-1	A	90	120	180	250	320	380
Coil Consumption	Sealed Ue (220V)	(VA)	11.6	11.6	11.6	11.6	15	15
Coil Operating Band (Ue)			65% to 120%	65% to 120%	65% to 120%	70% to 120%	70% to 120%	70% to 120%

* - Build in auxiliary contacts






1NO	10
1NC	01

- Control voltage code

220V	M5WB
415V	N5WB

EasyPact TVS contactors

Accessories for LC1E contactor

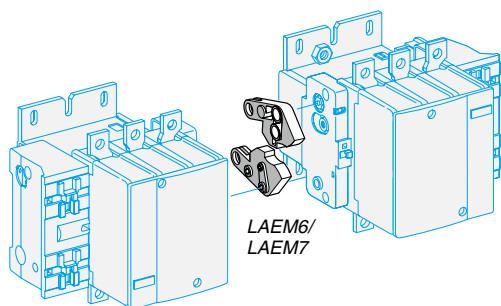

LC1E



LAEN22



LAETSD

Accessories for motor reverse assembly

Contactors with screw clamp terminals

Using 2 identical contactors	Set of power connections		Mechanical interlock	
	Cat. no.	Weight kg	Cat. no.	Weight kg
Mechanical interlock				
LC1E06...E12	LAEP1	0.020	LAEM1	0.030
LC1E18/E25	LAEP12	0.026	LAEM1	0.030
LC1E32/E38	LAEP2	0.040	LAEM1	0.030
LC1E40...E65	LAEP3	0.230	LAEM1	0.030
LC1E80/E95	LAEP4	0.465	LAEM4	0.095
LC1E120/E160	-	-	LAEM5	0.300
LC1E200/E250	-	-	LAEM6	0.110
LC1E300	-	-	LAEM7	0.250
LC1E400	-	-	LAEM8	0.14
LC1E500	-	-	LAEM9	0.14
LC1E630	-	-	LAEM10	0.15

RC surge suppressor

- > Effective protection for circuits highly sensitive to «high frequency» interference and transient generated when the contactor coil is switched off. For use only in cases where the voltage is virtually sinusoidal, i.e. less than 5 % total harmonic distortion.
- > Voltage limited to 3 U_c max. and oscillating frequency limited to 400 Hz max.
- > Slight increase in drop-out time (1.2 to 2 times the normal time).

Mounting	For use with contactor		Cat. no.	Weight kg
	Rating	Type V~		
Screw mounting	LC1E06...E95	24...48	LAERCE	0.025
		50...127	LAERCG	0.025
		110...240	LAERCU	0.025
		380...415	LAERCN	0.025

Instantaneous auxiliary contact blocks for connection by screw lamps terminals

For use in normal operating environment

Clip-on mounting	Number of contacts per block	Cat. no.	Weight kg
Front	1 NO / 1 NC	LAEN11	0.035
	2 NO	LAEN20	0.035
	2 NC	LAEN02	0.035
	2 NO / 2 NC	LAEN22	0.060

Time delay auxiliary contact blocks for connection by screw clamp terminals 8 A - 690 V

Clip-on mounting	Number of contacts per block	Time delay Type	Setting range	Cat. no. ⁽¹⁾	Weight kg
Front	1 NO / 1 NC	On-delay	1...30 s	LAETSD	0.060

(1) For use only LC1E25 to LC1E630.

EasyPact TVS contactors

Accessories for LC1E

Instantaneous and time delay contact characteristics									
Contact block type			LAEN11, 20, 02, 22	LAETSD					
Number of contacts			2 or 4	2					
Rated operational voltage (Ue) Up to		V	690						
Rated insulation voltage (Ui) Conforming to IEC 60947-5-1			690						
Conventional thermal current (Ith) For ambient temperature θ 60 C		A	8						
Frequency of the operational current		Hz	50/60						
Minimum switching capacity		U min	V	17					
		I min	mA	5					
Short-circuit protection Conforming to IEC 60947-5-1		A	10						
Rated making capacity Conforming to IEC 60947-5-1		I _{rms}	~ 140						
Short-time rating Permissible for		1 s	A	100					
		500 ms		120					
		100 ms		140					
Insulation resistance		m Ω	> 10						
Non-overlap time Guaranteed between NC and NO contacts		ms	1.5 (on energisation and on de-energisation)						
Overlap time Guaranteed between LAE N22 N/C and N/O contacts		ms	-						
Time delay		Ambient air temperature for operation	°C	-20...+70					
		Repeat accuracy		±2 %					
		Drift up to 0.5 million operating cycles		+15 %					
		Drift depending on ambient air temperature		0.25 % per C					
Mechanical durability		In millions of operating cycles	10	4					
Rated operational power of contacts (Conforming to IEC 60947-5-1)		a.c. supply categories AC14/15	V	24	48	115	230	400	440
		1 million operating cycles		60	120	280	560	960	1050
		3 million operating cycles	VA	16	32	80	160	280	300
		10 million operating cycles		4	8	20	4	70	80


Environment				
Contact block type			LAEN11, 20, 02, 22	LAETSD
Conforming to standard			IEC 60947-5-1	
Product certifications			GOST	
Protective treatment Conforming to IEC 60068			"TH"	
Degree of protection Conforming to IEC 60529			IP20	
Ambiant air temperature		Storage	°C	-60...+80
		Operation		-5...+55
		Permissible for operation at U _c		-20...+70
Maximum operating altitude Without derating		m	3000	
Connection by cable Philips N 2 and Ø 6 mm. Flexible or solid cable with or without cable end		mm ²	Min: 1 x 1 Max: 2 x 2.5	

Accessories compatibility						
Contactor	Built in contacts	LAEN●●	LAETSD	LAERC●	LAEM	LAEP●
LC1E06	1 NO or 1NC	1	-	1	1	1
LC1E09						
LC1E12						
LC1E18						
LC1E25						
LC1E32	1 NO + 1NC	1	or 1	-	1	1
LC1E38						
LC1E40						
LC1E50						
LC1E65						
LC1E80	-	2	or 0	-	-	DIY ⁽¹⁾
LC1E95						
LC1E120						
LC1E160						
LC1E200						
LC1E250	-	1	or 1	-	-	DIY ⁽¹⁾
LC1E300						
LC1E400						
LC1E500						
LC1E630						

(1) Do It Yourself.

EasyPact TVS contactors

Coil replacement for EasyPact TVS, LC1E06 to E38



LAEX1●●

For 3-pole contactors LC1E06...E18

Specifications

Average consumption at 20 °C:

> inrush ($\cos \varphi = 0.75$) 50 Hz: 95 VA; 60 Hz: 95 VA

> sealed ($\cos \varphi = 0.3$) 50 Hz: 8.5 VA; 60 Hz: 8.5 VA

Operating range ($\theta \leq 55$ °C): 0.85...1.1 Uc.

Control circuit voltage Uc	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	8.70	0.24	LAEX1B5	7.80	0.15	LAEX1B6	0.056
48	37.0	1.00	LAEX1E5	-	-	-	0.056
110	190	4.64	LAEX1F5	170	3.07	LAEX1F6	0.056
220	750	19.7	LAEX1M5	690	11.6	LAEX1M6	0.056
240	890	23.4	LAEX1U5	-	-	-	0.056
380	2250	58.3	LAEX1Q5	2110	35.4	LAEX1Q6	0.056
415	2610	69.0	LAEX1N5	-	-	-	0.056
440	2690	78.2	LAEX1R5	2760	50.7	LAEX1R6	0.056

For 3-pole contactors LC1E25

Specifications


Average consumption at 20 °C:

> inrush ($\cos \varphi = 0.75$) 50 Hz: 70 VA; 60 Hz: 70 VA

> sealed ($\cos \varphi = 0.3$) 50 Hz: 7 VA; 60 Hz: 7.5 VA

Operating range ($\theta \leq 55$ °C): 0.85...1.1 Uc.

Control circuit voltage Uc	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	5.37	0.21	LAEX12B5	5.37	0.18	LAEX12B6	0.067
48	21.7	0.84	LAEX12E5	-	-	-	0.067
110	124	4.41	LAEX12F5	124	3.68	LAEX12F6	0.067
220	515	17.6	LAEX12M5	516	14.7	LAEX12M6	0.067
240	562	21.0	LAEX12U5	-	-	-	0.067
380	1550	52.6	LAEX12Q5	1550	43.8	LAEX12Q6	0.067
415	1690	62.8	LAEX12N5	-	-	-	0.067
440	1990	70.6	LAEX12R5	1990	58.9	LAEX12R6	0.067



LAEX2●●

For 3-pole contactors LC1E32/E38

Specifications

Average consumption at 20 °C:

> inrush ($\cos \varphi = 0.75$) 50 Hz: 70 VA; 60 Hz: 70 VA

> sealed ($\cos \varphi = 0.3$) 50 Hz: 7 VA; 60 Hz: 7.5 VA

Operating range ($\theta \leq 55$ °C): 0.85...1.1 Uc.

Control circuit voltage Uc	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	5.37	0.21	LAEX2B5	5.37	0.18	LAEX2B6	0.073
48	21.7	0.84	LAEX2E5	-	-	-	0.073
110	124	4.41	LAEX2F5	124	3.68	LAEX2F6	0.073
220	515	17.6	LAEX2M5	516	14.7	LAEX2M6	0.073
240	562	21.0	LAEX2U5	-	-	-	0.073
380	1550	52.6	LAEX2Q5	1550	43.8	LAEX2Q6	0.073
415	1690	62.8	LAEX2N5	-	-	-	0.073
440	1990	70.6	LAEX2R5	1990	58.9	LAEX2R6	0.073

(1) The last two digits in the reference represent the voltage code.

EasyPact TVS contactors


Coil replacement for EasyPact TVS, LC1E40 to E160

For 3-pole contactors LC1E40...E65

Specifications

Average consumption at 20 °C:
 > inrush (cos φ = 0.75): 50 Hz: 160 VA; 60 Hz: 140 VA
 > sealed (cos φ = 0.3) 50 Hz: 15 VA; 60 Hz: 13 VA
 Operating range (θ 60 °C): 0.85...1.1 Uc

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	1.98	0.12	LAEX3B5	1.98	0.10	LAEX3B6	0.110
48	7.97	0.48	LAEX3E5	-	-	-	0.110
110	42.3	2.51	LAEX3F5	42.3	2.09	LAEX3F6	0.110
220	182	10.0	LAEX3M5	182	8.36	LAEX3M6	0.110
240	202	12.0	LAEX3U5	-	-	-	0.110
380	512	30.3	LAEX3Q5	512	25.3	LAEX3Q6	0.110
415	635	35.8	LAEX3N5	-	-	-	0.110
440	682	40.1	LAEX3R5	682	33.4	LAEX3R6	0.110




LAEX4●●

For 3-pole contactors LC1E80/E95

Specifications

Average consumption at 20 °C:
 > inrush (cos φ = 0.75) 50 Hz: 200 VA; 60 Hz: 220 VA
 > sealed (cos φ = 0.3) 50 Hz: 20 VA; 60 Hz: 22 VA
 Operating range (θ 55 °C): 0.85...1.1 Uc

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	1.4	0.09	LAEX4B5	1.05	0.06	LAEX4B6	0.145
48	5.5	0.35	LAEX4E5	-	-	-	0.145
110	31.0	1.90	LAEX4F5	22.0	1.20	LAEX4F6	0.145
220	127	7.50	LAEX4M5	98	4.80	LAEX4M6	0.145
240	152	8.70	LAEX4U5	-	-	-	0.145
380	381	22.0	LAEX4Q5	300	14.0	LAEX4Q6	0.145
415	463	26.0	LAEX4N5	-	-	-	0.145
440	513	30.0	LAEX4R5	392	19.0	LAEX4R6	0.145

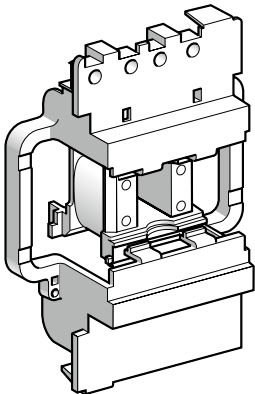

LAEX5●●

For 3-pole contactors LC1E120/E160

Specifications


Average consumption at 20 °C:
 > inrush (cos φ = 0.8) 50 Hz: 300 VA
 > sealed (cos φ = 0.8) 50 Hz: 22 VA
 Operating range (θ 55 °C): 0.85...1.1 Uc

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	1.24	0.09	LAEX5B5	0.87	0.07	LAEX5B6	0.210
48	4.51	0.36	LAEX5E5	-	-	-	0.210
110	26.5	2.00	LAEX5F5	20.0	1.45	LAEX5F6	0.210
220	105	7.65	LAEX5M5	79.6	5.69	LAEX5M6	0.210
240	125	8.89	LAEX5U5	-	-	-	0.210
380	339	22.3	LAEX5Q5	243	17.0	LAEX5Q6	0.210
415	368	27.7	LAEX5N5	-	-	-	0.210
440	442	30.3	LAEX5R5	339	22.3	LAEX5R6	0.210

(1) The last two digits in the reference represent the voltage code.

EasyPact TVS contactors

Coil replacement for EasyPact TVS, LC1E200 to E300



LAEX6●●

For 3-pole contactors LC1E200...E250

Specifications

Average consumption at 20 °C:


> inrush ($\cos \varphi = 0.9$) 50 Hz: 805 VA; 60 Hz: 970 VA

> sealed ($\cos \varphi = 0.3$) 50 Hz: 55 VA; 60 Hz: 66 VA

Heat dissipation: 18...24 W.

Operating time à U_c : closing = 20...35 ms, opening = 7...15 ms.

Control circuit voltage U_c	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	0.18	0.03	LAEX6B5	0.13	0.02	LAEX6B6	0.510
48	0.71	0.12	LAEX6E5	-	-	-	0.510
110	4.2	0.65	LAEX6F5	2.7	0.44	LAEX6F6	0.510
220	17	2.59	LAEX6M5	11.1	1.80	LAEX6M6	0.510
240	20	3.09	LAEX6U5	-	-	-	0.510
380	51.3	7.8	LAEX6Q5	34	5.3	LAEX6Q6	0.510
415	62.3	9.1	LAEX6N5	-	-	-	0.510
440	62.3	9.1	LAEX6R5	43.5	6.9	LAEX6R6	0.510



LAEX7●●

For 3-pole contactors LC1E300

Specifications

Average consumption at 20 °C:

> inrush ($\cos \varphi = 0.9$) 50 Hz or 60 Hz: 650 VA

> sealed ($\cos \varphi = 0.3$) 50 Hz or 60 Hz: 10 VA.

Heat dissipation: 8 W.

Operating time à U_c : closing = 40...65 ms, opening = 100...170 ms.

Operate on networks with harmonic numbers 7.

Operating cycles/hour ($\theta = 55$ °C): 2400


Control circuit voltage U_c	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. ⁽¹⁾	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	20	⁽²⁾	LAEX7B5	20	⁽²⁾	LAEX7B6	0.770
48	67	⁽²⁾	LAEX7E5	-	-	-	0.770
110	440	⁽²⁾	LAEX7F5	440	⁽²⁾	LAEX7F6	0.770
220	1578	⁽²⁾	LAEX7M5	1578	⁽²⁾	LAEX7M6	0.770
240	1968	⁽²⁾	LAEX7U5	-	-	-	0.770
380	4631	⁽²⁾	LAEX7Q5	4631	⁽²⁾	LAEX7Q6	0.770
415	4631	⁽²⁾	LAEX7N5	-	-	-	0.770
440	6731	⁽²⁾	LAEX7R5	6731	⁽²⁾	LAEX7R6	0.770

⁽¹⁾ The last two digits in the reference represent the voltage code.

⁽²⁾ Please consult your Regional Sales Office.

EasyPact TVS contactors

Coil replacement for EasyPact TVS, LC1E400* to E630*



LAEX8●●

For 3-pole contactors LC1E400

Average consumption at 20 °C:

> inrush ($\cos\phi = 0.9$) 50Hz or 60Hz: 1000...1150


> sealed ($\cos\phi = 0.9$) 50Hz or 60Hz: 12...18VA

Heat dissipation : 14W

Operation time à U_c : closing=40...75ms, opening=100...170ms

Operating cycles/hour ($\theta = 55$ °C): 2400

Control circuit voltage U_c	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no.	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no.	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
48	29.5	0.18		-	-		1
110	230	1.35		230	1.35		1
220	1030	5.1		1030	5.1		1
240	1320	6.4		-	-		1
380	3310	15.8		3310	15.8		1
415	4070	19.4		-	-		1
440	4070	19.4		4070	19.4		1



LAEX9●●

For 3-pole contactors LC1E500

Average consumption at 20 °C:

> inrush ($\cos\phi = 0.9$) 50Hz or 60Hz: 1050...1150A


> sealed ($\cos\phi = 0.9$) 50Hz or 60Hz: 16...20VA

Heat dissipation : 18W

Operation time à U_c : closing=40...75ms, opening=100...170ms

Operating cycles/hour ($\theta = 55$ °C): 2400

Control circuit voltage U_c	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no.	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no.	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
48	33.5	0.19		-	-		1.15
110	260	1.25		258	1.25		1.15
220	915	4.55		916	4.55		1.15
240	1160	5.75		-	-		1.15
380	2980	14.7		2981	14.7		1.15
415	3730	18.4		-	-		1.15
440	3730	18.4		3733	18.4		1.15



LAEX10●●

For 3-pole contactors LC1E630

Average consumption at 20 °C:

> inrush ($\cos\phi = 0.9$) 50Hz or 60Hz: 1500...1730VA

> sealed ($\cos\phi = 0.9$) 50Hz or 60Hz: 20...25VA

Heat dissipation : 20W

Operation time à U_c : closing=40...80ms, opening=100...200ms


Operating cycles/hour ($\theta = 55$ °C): 1200

Control circuit voltage U_c	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no.	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Cat. no.	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
48	17.1	0.09		-	-		1.5
110	165	1.85		165	1.85		1.5
220	730	3.35		730	3.35		1.5
240	730	3.35		-	-		1.5
380	2360	10.5		2360	10.5		1.5
415	2960	13		-	-		1.5
440	2960	13		2960	13		1.5

* Above 400A will be available from Q2 2013

EasyPact TVS contactors

Replacement contacts for EasyPact TVS, LC1E120 to E630



LAEC6

Sets of contacts


Per pole: 2 fixed contacts, 1 moving contact, 2 deflectors, 1 back-plate, clamping screws and washers.

For contactor	Type	Replacement for	Cat. no. 50 Hz	Weight kg
3-pole	LC1E120	3 poles	LAEC5	0.350
	LC1E160	3 poles	LAEC51	0.350
	LC1E200	3 poles	LAEC6	0.350
	LC1E250	3 poles	LAEC61	0.660
	LC1E300	3 poles	LAEC7	2.000
	LC1E400	3 poles	LAEC71	2
	LC1E500	3 poles	LAEC8	2.95
	LC1E630	3 poles	LAEC9	6.1

EasyPact TVS contactors


LC1E06 to E95

LC1E06...E25

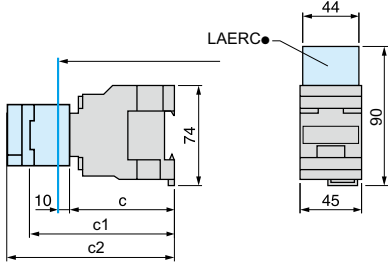


LC1	E06...E18	E25
c	80	85
c1 with LAEN	113	118
c2 with LAETSD	-	136

LC1E32/38

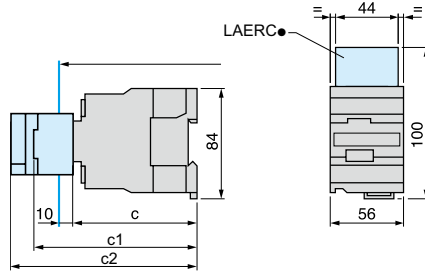


LC1	E32/38
c	86
c1 with LAEN	120
c2 with LAETSD	138

LC1E06...E25

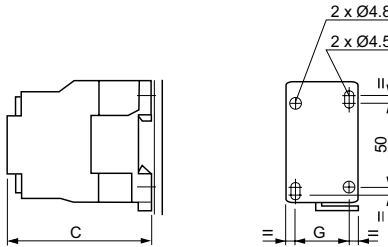


LC1	E06	E09	E12	E18	E25
c	80	80	80	80	85
G	35	35	35	35	35

LC1E32/38

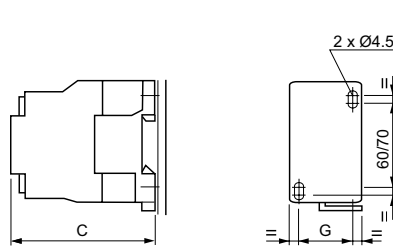


LC1	E32/38
c	86
G	40

LC1E40...E65

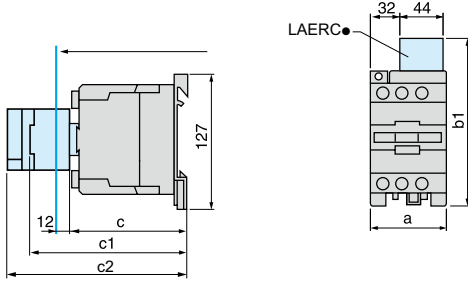


LC1	E40...E65	
a	75	
b1	with LAERC●	135
c		114
c1	with LAEN●	147
c2	with LAETSD	165

LC1E80/95

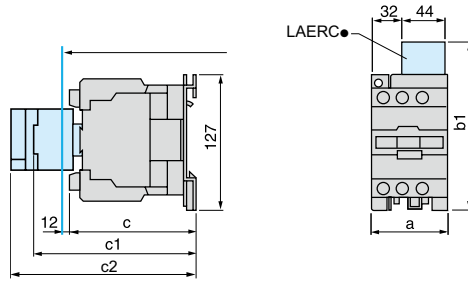


LC1	E80/95	
a	85	
b1	with LAERC●	135
c		121
c1	with LAEN●	153
c2	with LAETSD	171

2 x LC1E06...E65 with LAEM1

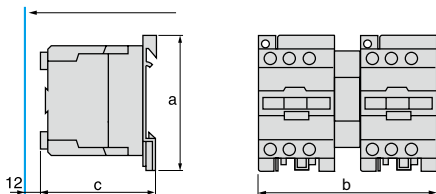

LC1	E06...25	E32...38	E40...65
a	74	84	127
b	104	126	164
c	80	86	114

2 x LC1E80/95 with LAEM4

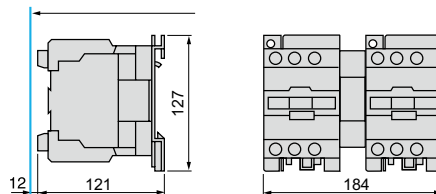


EasyPact TVS contactors

LC1E120 and 160 A


LC1E120/160

On panel with accessories

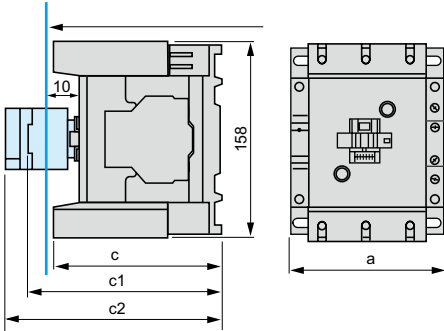


a		120
c	Without add-on blocks	132
c1	With LAEN	150
c2	With LAETSD	168

On 2 mounting rails DZ5 MB on 120 mm centres

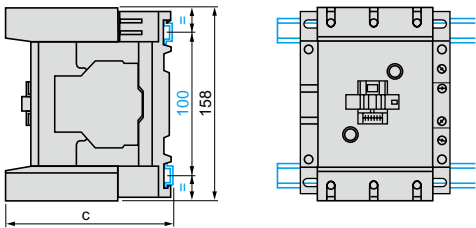


c	(AM1 DP200 or DR200)	134.5
c	(AM1 DE200 or ED●●●)	150

On Panel

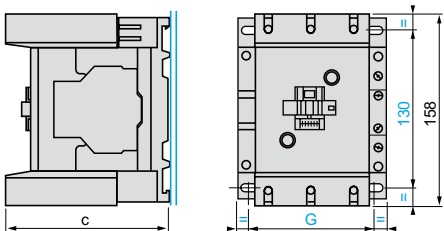

	LC1E120	LC1E160
c	(AM1 DP200 or DR200)	132
G	91/110	96/110

2 x LC1E120 or LC160 with LAEM5

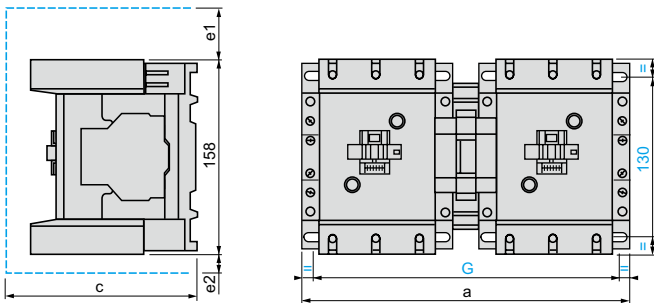

2 x LC1E120 or 160	a	c	e1	e2	G
For 120 and 160	266	148	56	18	242/256


c, e1 and e2: including cabling

EasyPact TVS contactors

LC1E200, E250 and E300 A

LC1E200 - LC1E250 - LC1E300

On panel

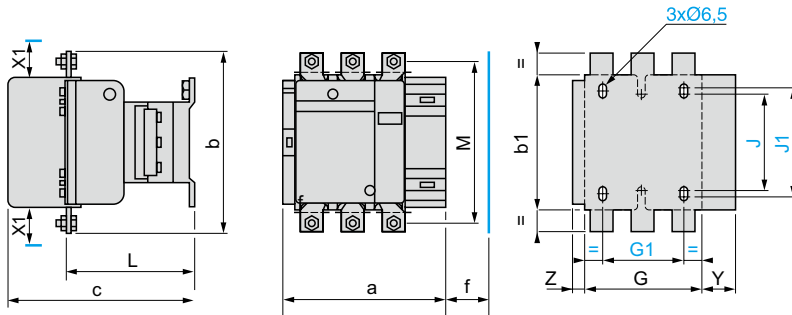


X1 (mm) = minimum electrical clearance according to operating voltage and breaking capacity.

	220...500 V	600...690 V
LC1E200	10	15
LC1E250, 300	10	15

	a	b	b1	c	f	G	G1	J	J1	L	M	P	Q	Q1	S	Y	Z
LC1E200	168.5	174	137	181	130	111	80	106	120	113.5	154	40	29	59.5	20	44	13.5
LC1E250	168.5	197	137	181	130	111	80	106	120	113.5	172	48	21	51.5	25	44	13.5
LC1E300	213	206	145	219	147	154.5	96	106	120	145	181	48	43	74	25	38	20.5

f = minimum distance required for coil removal.

2 x LC1E200 or LC1E250 with LAEM6 - 2 x LC1E300 with LAEM7

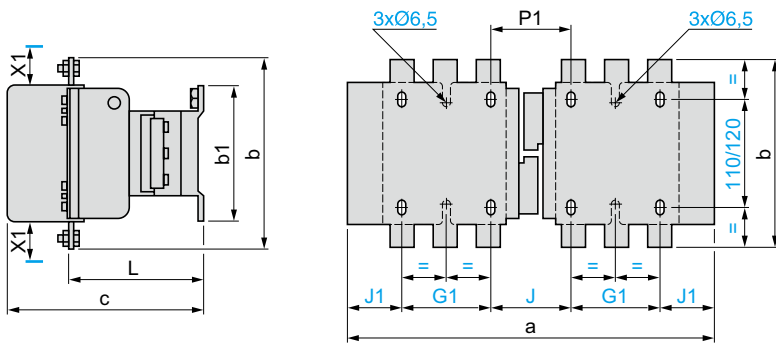

X1 (mm) = minimum electrical clearance according to operating voltage and breaking capacity.

	220...500 V	600...690 V
LC1E200	10	15
LC1E250, 300	10	15


	a	b	b1	c	G1	J	J1	L	P1
2 x LC1E200	357	174	137	181	80	78	59.5	113.5	78
2 x LC1E250	357	197	137	181	80	78	59.5	113.5	62
2 x LC1E300	447	206	145	219	96	124	65.5	145	107

EasyPact TVS contactors

LC1E400, E500 and E630 A

LC1E400 - LC1E500

On panel

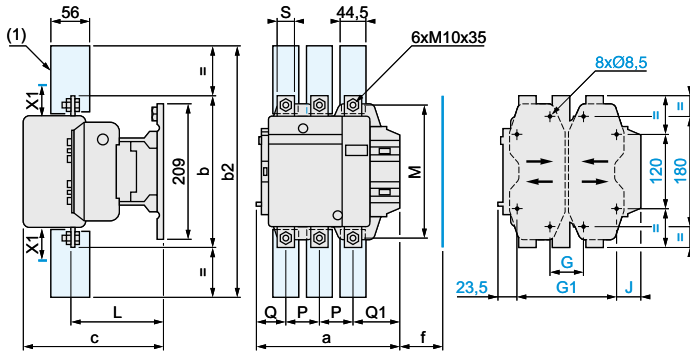

X1 (mm) minimum electrical clearence according to operating voltage and breaking capacity.


	220...500 V	600...690 V
LC1E400	15	20
LC1E500	15	20

(1) Power terminal protection shroud (see page 5/126).

	a	b	b2	c	f	G*	Gmin.	Gmax.	G1*	G1min.	G1max.	J	L	M	P	Q	Q1	S
LC1E400	213	206	375	219	146	80	66	102	170	156	192	19.5	145	181	48	43	74	25
LC1E500	233	238	400	232	150	80	66	120	170	156	210	39.5	146	208	55	46	77	30

f=minimum distance required for coil removal

LC1E630

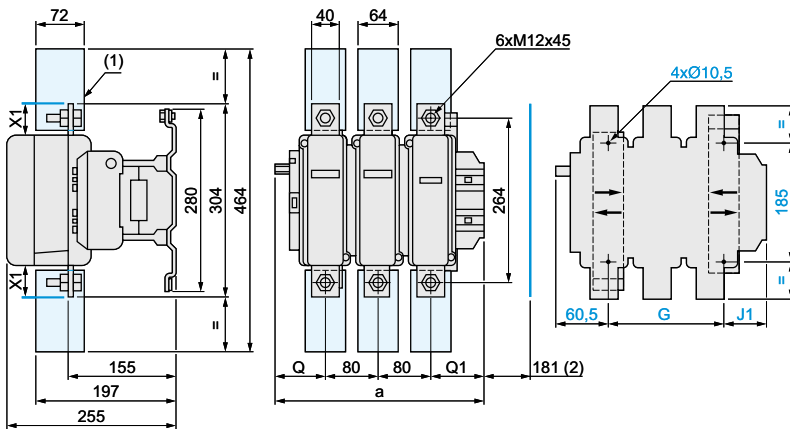

X1 (mm) = minimum electrical clearence according to operation voltage and breaking capacity.

	220...500 V	600...690 V
LC1E630	20	30

(1) Power terminal protection shroud (see page 5/126).
(2) Minimum distance required for coil removal.


	a	G*	G min	Gmax.	J1	Q	Q1
LC1E630	309	180	100	195	68.5	60	89

2 x LC1E400,LC1E500,LC1E630

X1 (mm) = minimum electrical clearence according to operating voltage and breaking capacity.

	220...500 V	600...690 V
LC1E400,500	15	20
LC1E630	20	30

(1) Except LC1 E630 : 4 x Ø 10.5.
(2) Except LC1 E630.

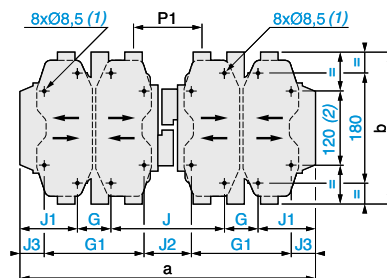

	a	b	b1	c	G	G1	J	J1	J2	J3	L	P1
2 x LC1E400	446	206	209	219	80	170	157	64.5	67	19.5	145	107
3 x LC1E500	485	238	209	232	80	170	156	84.5	66	39.5	146	112
4 x LC1E630	636	304	280	255	180	-	139	68.5	-	-	155	137

EasyPact TVS contactors

LC1E06...630 A


Contactors

LC1E06...38


LC1E40...95

LC1E120/160

LC1E200, 250, 300

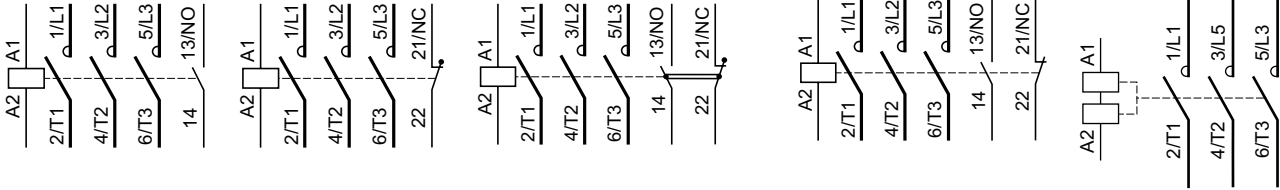

LC1E 400,500,630




Reversing contactors

2 x LC1E06...38

2 x LC1E40...95


Horizontally mounted

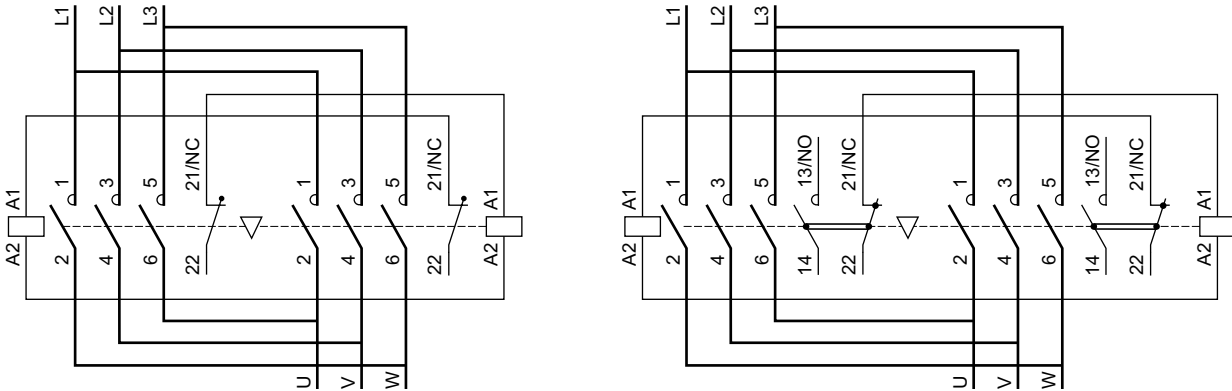

2 x LC1E120, 160

2 x LC1E200, 250, 300

Horizontally mounted

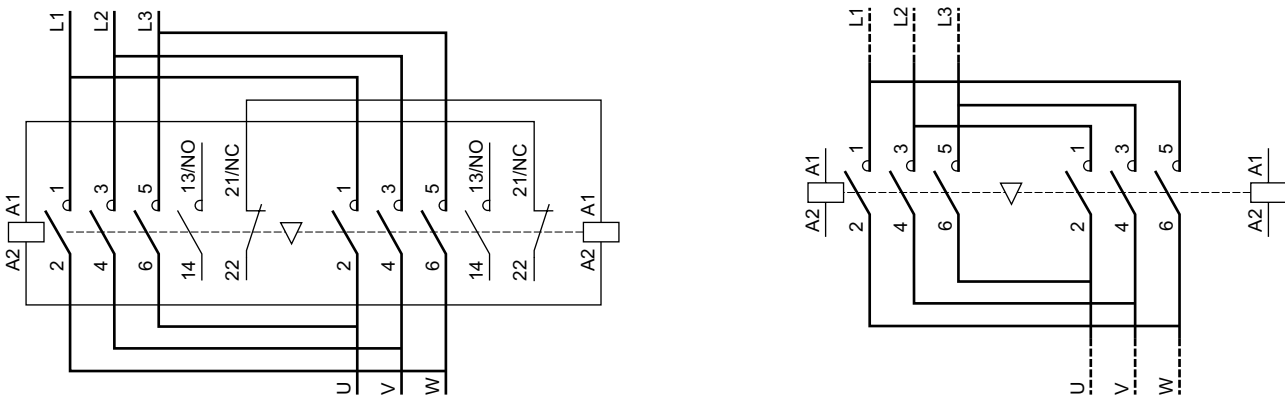

Front mounting add-on contact blocks

1NO + 1NC (LAEN11) 2NO (LAEN20)


2NC (LAEN02)

2NO + 2NC (LAEN22)




Time delay auxiliary contacts

On delay 1NO + 1NC (LAETSD)



Mechanical interlock

LAEM●





EasyPact TVS thermal



Thermal overload relay Reference	Relay setting range (A)	Compatible with Contactor (size 1 & 2) Commercial Reference						
		LC1E06	LC1E09	LC1E12	LC1E18	LC1E25	LC1E32	LC1E38
LRE01	0.10...0.16 A	■	■	■	■	■	■	■
LRE02	0.16...0.25 A	■	■	■	■	■	■	■
LRE03	0.25...0.40 A	■	■	■	■	■	■	■
LRE04	0.40...0.63 A	■	■	■	■	■	■	■
LRE05	0.63...1 A	■	■	■	■	■	■	■
LRE06	1...1.6 A	■	■	■	■	■	■	■
LRE07	1.6...2.5 A	■	■	■	■	■	■	■
LRE08	2.5...4 A	■	■	■	■	■	■	■
LRE10	4...6 A	■	■	■	■	■	■	■
LRE12	5.5...8 A		■	■	■	■	■	■
LRE14	7...10 A		■	■	■	■	■	■
LRE16	9...13 A			■	■	■	■	■
LRE21	12...18 A				■	■	■	■
LRE22	16...24 A					■	■	■
LRE32	23...32 A					■	■	■
LRE35	30...38 A							■

Common characteristics

- > Class: 10 A.
- > Operating voltage: max. 690 V AC.

overload relays



Thermal overload relay Reference	Relay setting range (A)	Compatible with Contactor (size 3 & 4) Commercial Reference				
		LC1E40	LC1E50	LC1E65	LC1E80	LC1E95
LRE322	17...25 A	■	■	■	■	■
LRE353	23...32 A	■	■	■	■	■
LRE355	30...40 A	■	■	■	■	■
LRE357	37...50 A		■	■	■	■
LRE359	48...65 A			■	■	■
LRE361	55...70 A				■	■
LRE363	63...80 A				■	■
LRE365	80...104 A					■



Thermal overload relay Reference	Relay setting range (A)	Compatible with Contactor (size 5, 6, 7, 8 & 9) Commercial Reference							
		LC1E120	LC1E160	LC1E200	LC1E250	LC1E300	LC1E400	LC1E500	LC1E630
LRE480	51...81A	■	■	□	□	□	□	□	□
LRE481	62...99A	■	■	□	□	□	□	□	□
LRE482	84...135A	■	■	□	□	□	□	□	□
LRE483	124...198A		□	■	□	□	□	□	□
LRE484	146...234A			□	■	■	■	□	□
LRE485	174...279A			□	■	■	■	□	□
LRE486	208...333A				■	■	■	□	□
LRE487	259...414A					■	■	□	□
LRE488	321...513A						□	■	□
LRE489	394...630A							□	■

Note:

- means the relay can match with contactor both in electrical and mechanical.
- means the relay can match with contactor only in electrical (can not directly mounting).

Presentation




EasyPact TVS thermal overload relays are designed to protect a.c. circuits and motors against:

- > overloads
- > phase failure
- > Long starting time
- > prolonged stalled rotor condition.


The thermal relay controls permanently the current driven by the motor. When this current exceeds the setting it's auxiliary contacts will change state, causing the motor to stop.

Description

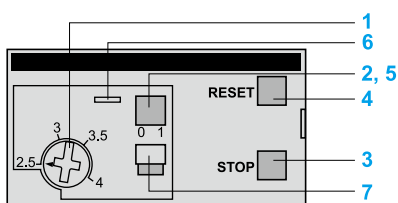

LRE●●, LRE48●

- 1 Adjustment dial I_r .
- 2 Test button.
Operation of the Test button allows:
 - checking of control circuit wiring,
 - simulation of relay tripping (actuates both the N/O and N/C contacts).
- 3 Stop button. Actuates the N/C contact; does not affect the N/O contact.
- 4 Reset button.
- 5 Trip indicator.
- 6 Setting locked by sealing the cover.
- 7 Selector for manual or automatic reset.

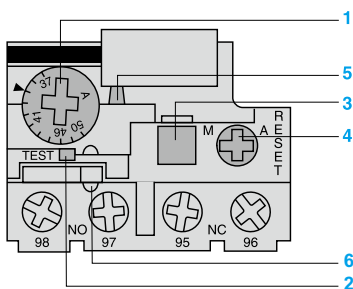

LRE3●●

LRE relays are supplied with the selector in the manual position, protected by a cover. Deliberate action is required to move it to the automatic position.

EasyPact TVS thermal overload relays


Power circuit characteristics										
Relay type	Ref.	LRE 01...21	LRE 22...35	LRE 322...365	LRE 480...482	LRE 483	LRE 484	LRE 485...487*	LRE 488*	LRE 489*
Size		1	2	3	3	3	3	4	4	4
Tripping class	Conforming to IEC 60947-4-1	10 A								
Rated insulation voltage	Conforming to IEC 60947-4-1	V 690								
Rated impulse withstand voltage (Uimp)		kV 6								
Frequency limits	Of the operating current	Hz 50...60								
Setting range	Depending on model	A 0.1...18 16...38 17...104 51...630								
Power circuit connections										
Connection by screw clamp terminals		Minimum/maximum c.s.a.								
	Flexible cable without cable end 1 conductor	mm ²	1.5...6	2.5...10	4...35	-				
	Flexible cable with cable end 1 conductor		1...4	1.5...6	4...35	-				
	Solid cable without cable end 1 conductor		1...6	2.5...10	4...35	-				
	Tightening torque	N.m	1.7	2.5	9	-				
Connection by bars or lugs										
Pitch	Without spreaders	mm	-	-	34.8	40	48	48	55	80
Bars or cables with lugs	Cross section		-	-	3X18	3X20	3X25	4X25	5x30	6X40
Screws	Type		-	-	M8	M8	M10	M10	M10	M12
	Tightening torque	N.m	-	-	27.5	27.5	35	35	35	58
Auxiliary contact characteristics										
Conventional thermal current		A	5							
Max. sealed consumption of the operating coils of controlled contactors (Occasional operating cycles of contact 95-96)	a.c. supply	V	110	120	220	240	380	480	500	600
		A	3.27	3	1.63	1.5	0.95	0.75	0.72	0.12
Protection against short-circuits	By gG, maximum rating or by GB2	A	5							
Connection by screw clamp terminals		Minimum/maximum c.s.a.								
	Flexible cable without cable end 1 conductor	mm ²	2 x 1...2.5							
	Flexible cable with cable end 1 conductor		2 x 1...2.5							
	Solid cable without cable end 1 conductor		2 x 1...2.5							
	Tightening torque	N.m	1.7							
Environment										
Conforming to standard			IEC 60947-4-1, IEC 60947-5-1							
Product certifications			GOST							
Degree of protection	Conforming to IEC 60529		IP20				IP00			
Protective treatment	Conforming to IEC 60068		"TH"							
Ambiant air temperature	Storage	°C	-60...+80							
	Normal operation without derating (IEC 60947-4-1)		-20...+60							
	Minimum/maximum operating temperature (with derating) ⁽¹⁾		-20...+70							
Operating positions without derating	In relation to normal vertical mounting plane		Any position							
Flame resistance	Conforming to IEC 60068-2-1	°C	850							
Shock resistance	Permissive acceleration conforming to IEC 60068-2-7		6 gn - 11 ms							
Vibration resistance	Permissive acceleration conforming to IEC 60068-2-6		3 gn							
Dielectric strenght at 50 Hz	Conforming to IEC 60255-5	kV	6							
Surge withstand	Conforming to IEC 60801-5		6							
Operating characteristics										
Temperature compensation		°C	-20...+60							
Tripping threshold	Conforming to IEC 60947-4-1	A	1.14 ± 0.06 I _r							
Sensitivity to phase failure	Conforming to IEC 60947-4-1		Tripping current 130 % of I _r on two phase, the last one at 0							

(1) Contact your regional sales.

* LRE487/8/9 will be available from Q2 2013

Tripping curves

Average operating time related to multiples of the setting current

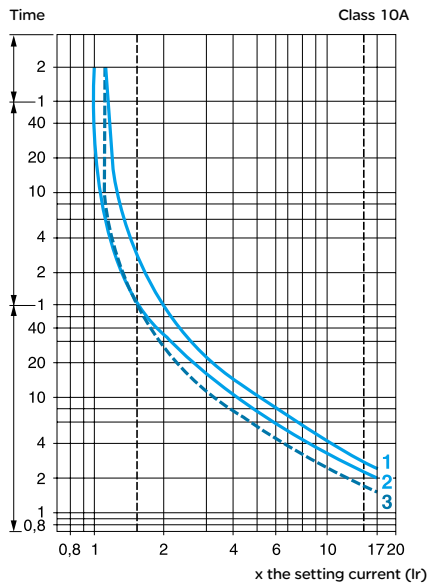

- 1 *Balanced operation, 3-phase, without prior current flow (cold state).*
- 2 *2-phase operation, without prior current flow (cold state).*
- 3 *Balanced operation, 3-phase, after a long period at the set current (hot state).*

EasyPact TVS thermal overload relays

3-pole thermal overload relays



LRE00



LRE30



LRE48

Differential thermal overload relays

for use with fuses or magnetic circuit-breakers GV2 L and GV3 L

- > Compensated relays with manual or automatic reset,
- > with relay trip indicator,
- > for a.c.

Relay setting range (A)	Fuses to be used with selected relay		For use with contactor LC1	Reference	Weight kg
	aM (A)	gG (A)			
Class 10 A ⁽¹⁾ for connection by screw clamp terminals					
0.10...0.16	0.25	2	E06...E38	LRE01	0.130
0.16...0.25	0.5	2	E06...E38	LRE02	0.130
0.25...0.40	1	2	E06...E38	LRE03	0.130
0.40...0.63	1	2	E06...E38	LRE04	0.130
0.63...1	2	4	E06...E38	LRE05	0.130
1...1.6	2	4	E06...E38	LRE06	0.130
1.6...2.5	4	6	E06...E38	LRE07	0.130
2.5...4	6	10	E06...E38	LRE08	0.130
4...6	8	16	E09...E38	LRE10	0.130
5.5...8	12	20	E09...E38	LRE12	0.130
7...10	12	20	E09...E38	LRE14	0.130
9...13	16	25	E12...E38	LRE16	0.130
12...18	20	35	E18...E38	LRE21	0.130
16...24	25	50	E25...E38	LRE22	0.130
23...32	40	63	E25...E38	LRE32	0.130
30...38	40	80	E38	LRE35	0.130
17...25	25	50	E40...E95	LRE322	0.470
23...32	40	63	E40...E95	LRE353	0.470
30...40	40	100	E40...E95	LRE355	0.470
37...50	63	100	E50...E95	LRE357	0.460
48...65	63	100	E65...E95	LRE359	0.460
55...70	80	125	E80...E95	LRE361	0.480
63...80	80	125	E80...E95	LRE363	0.480
80...104	80	160	E95	LRE365	0.520
Class 10 A ⁽¹⁾ for connection by connectors					
51...81	100	125	E120...E300	LRE480	2.2
62...99	125	160	E120...E300	LRE481	2.2
84...135	160	200	E120...E300	LRE482	2.2
124...198	200	250	E160...E300	LRE483	2.1
146...234	250	315	E200...E300	LRE484	2.2
174...279	315	315	E250...E300	LRE485	2.2
208...333	400	400	E300	LRE486	2.2
259...414	400	500	E500	LRE487*	2.4
321...513	500	800	E630	LRE488*	3.2
394...630	630	1000	E630	LRE489*	3.9

(1) Standard IEC 60947-4-1 specifies a tripping time for 7.2 times the setting current I_R : class 10 A: between 2 and 10 seconds.


* LRE487/8/9 will be available from Q2 2013

EasyPact TVS thermal overload relays

Direct connection to LRE contactors

LRE01...E35


Direct mounting under LC1E06...38 contactors with screw clamp connections

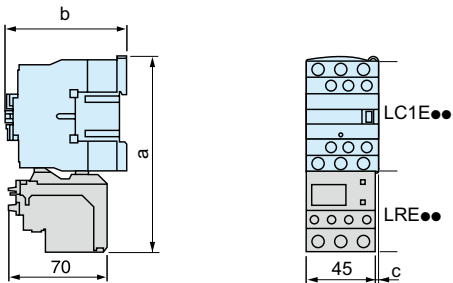

With contactor	LC1E06...E18	LC1E25	LC1E32/E38
a	123	137	137
b	84	92	92
c	0	0	11

LRE3●●


Direct mounting under LC1E06...38 contactors with screw clamp connections

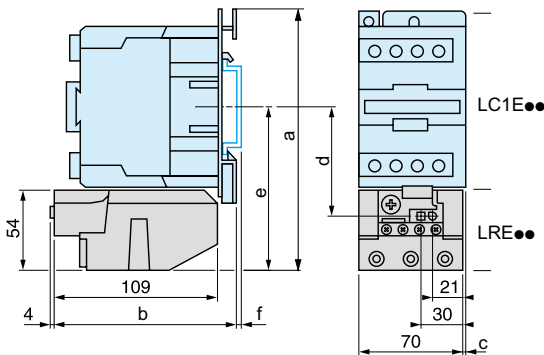

With contactor on DIN rail	AM1-DL201	AM1-DL200
f	7	17

With contactor	LC1E40	LC1E50	LC1E65	LC1E80	LC1E95
a	175	175	175	180	180
b	119	119	119	124	124
c	4.5	4.5	4.5	9.5	9.5
d	72.4	72.4	72.4	76.9	76.9
e	111	111	111	115.5	115.5

Electrical diagram all relays

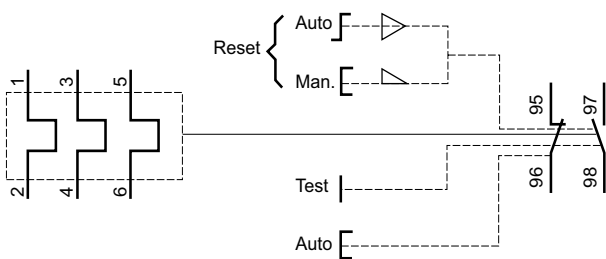


EasyPact TVS thermal overload relays

Connection to a terminal block

LRE01...E35 connected to LAEB1 terminal block


Independent mounting on 50 mm centres; or on rail AM1 DP200 or DE200

Independent mounting on 110 mm centres

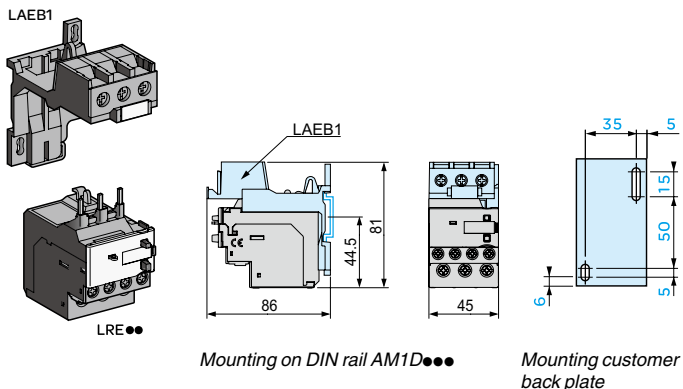

LRE322...E365, connected to LAEB3 terminal block

Independent mounting on 50 mm centres; or on rail AM1 DP200 or DE200

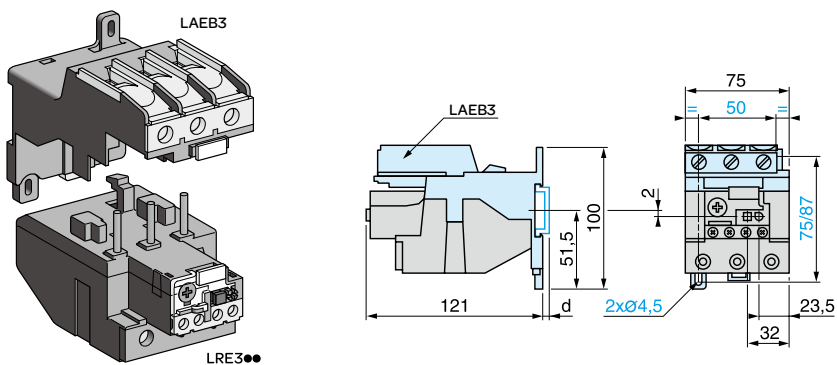

Mounting on DIN rail AM1D●●●

	AM1-DP200	AM1-DE200
d	2	9.5


EasyPact TVS thermal overload relays

Independent mounting and connection

LRE48●

Independent mounting on mounting plate

LRE48●: with direct mounting under contactors LC1E120...630 or separate mounting (without accessory).

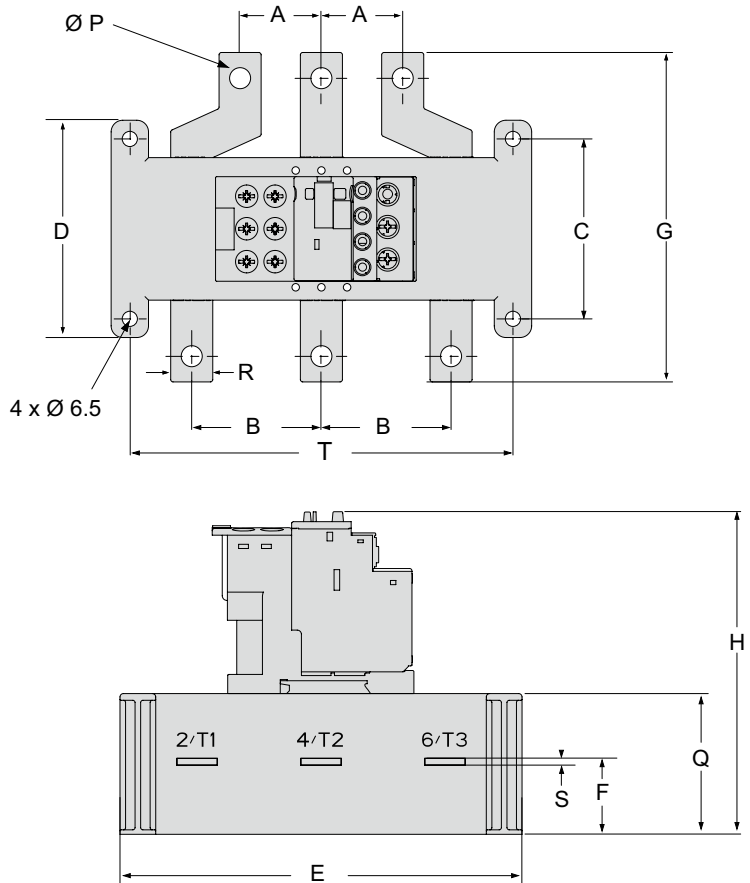

(mm)

Dimensions and mounting		A	B	C	D	E	F	G	H	P	Q	R	S	T
Range (A)														
LRE480	51...81	34.8	55.5	77	93	180	32	141	134	9	63	18	3	164
LRE481	62...99							10		20				
LRE482	84...135							12		25				
LRE483	124...198	40	55.5	77	93	180	32.5	134	134	12	63	25	4	164
LRE484	146...234	48						20						
LRE485	174...279	25						25						
LRE486	208...333	48	55.5	77	93	180	32.5	134	134	12	63	25	4	164
LRE487	259...414	48						20						
LRE488	321...513	55						76		242		43		
LRE489	394...630	80	80				43.5	150	148	14	77	40	6	222


EasyPact TVS thermal overload relays

Independent mounting and connection

LRE48●

Independent mounting on mounting plate

LRE48●: with direct mounting.

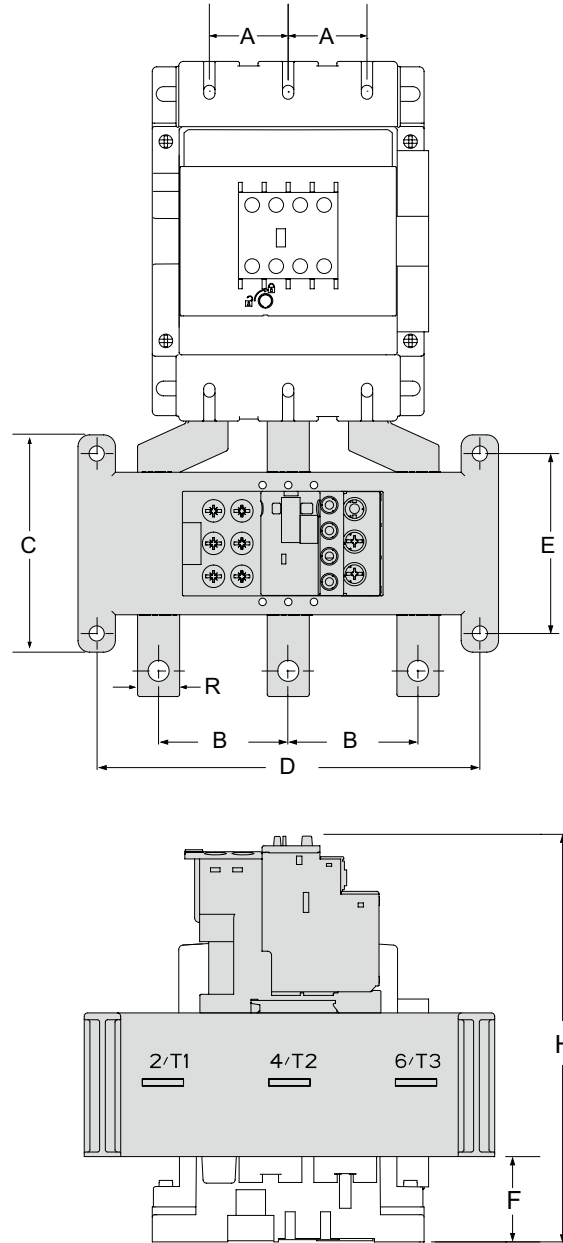


(mm)

Dimensions and mounting		A	B	C	D	E	F	H
Range (A)		A	B	C	D	E	F	H
LRE480	51...81	34.8	55.5	93	164	77	82	223
LRE481	62...99							
LRE482	84...135							
LRE483	124...198	40	76	93	164	77	113	255
LRE484	146...234							
LRE485	174...279							
LRE486	208...333	48	80	93	164	77	125	279
LRE487	259...414							
LRE488	321...513							
LRE489	394...630	80	80	93	222	77	125	279


EasyPact TVS thermal overload relays

Independant mounting and connection

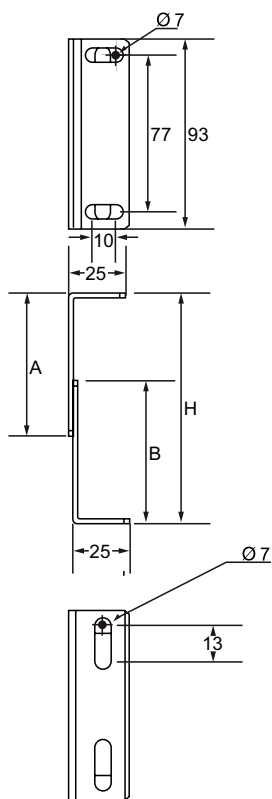


Accessories for LRE48X Thermal Overload Relay			
Relay mounting with Contactor directly			
Relay	Contactor	Mounting support	
		cat No.	weight (Kg)
LRE480	LC1E120...160	LAES1	0.12
LRE481	LC1E120...160	LAES1	0.12
LRE482	LC1E120...160	LAES1	0.12
LRE483	LC1E200	LAES2	0.2
LRE484	LC1E250...300	LAES2	0.2
LRE485	LC1E250...300	LAES2	0.2
LRE486	LC1E250...300	LAES2	0.2
LRE487	LC1E300...400	LAES2	0.2

Dimension	LAES1	LAES2	
A (mm)	34	70	
B (mm)	30	70	
C (mm)	34-42	75-90	107-122

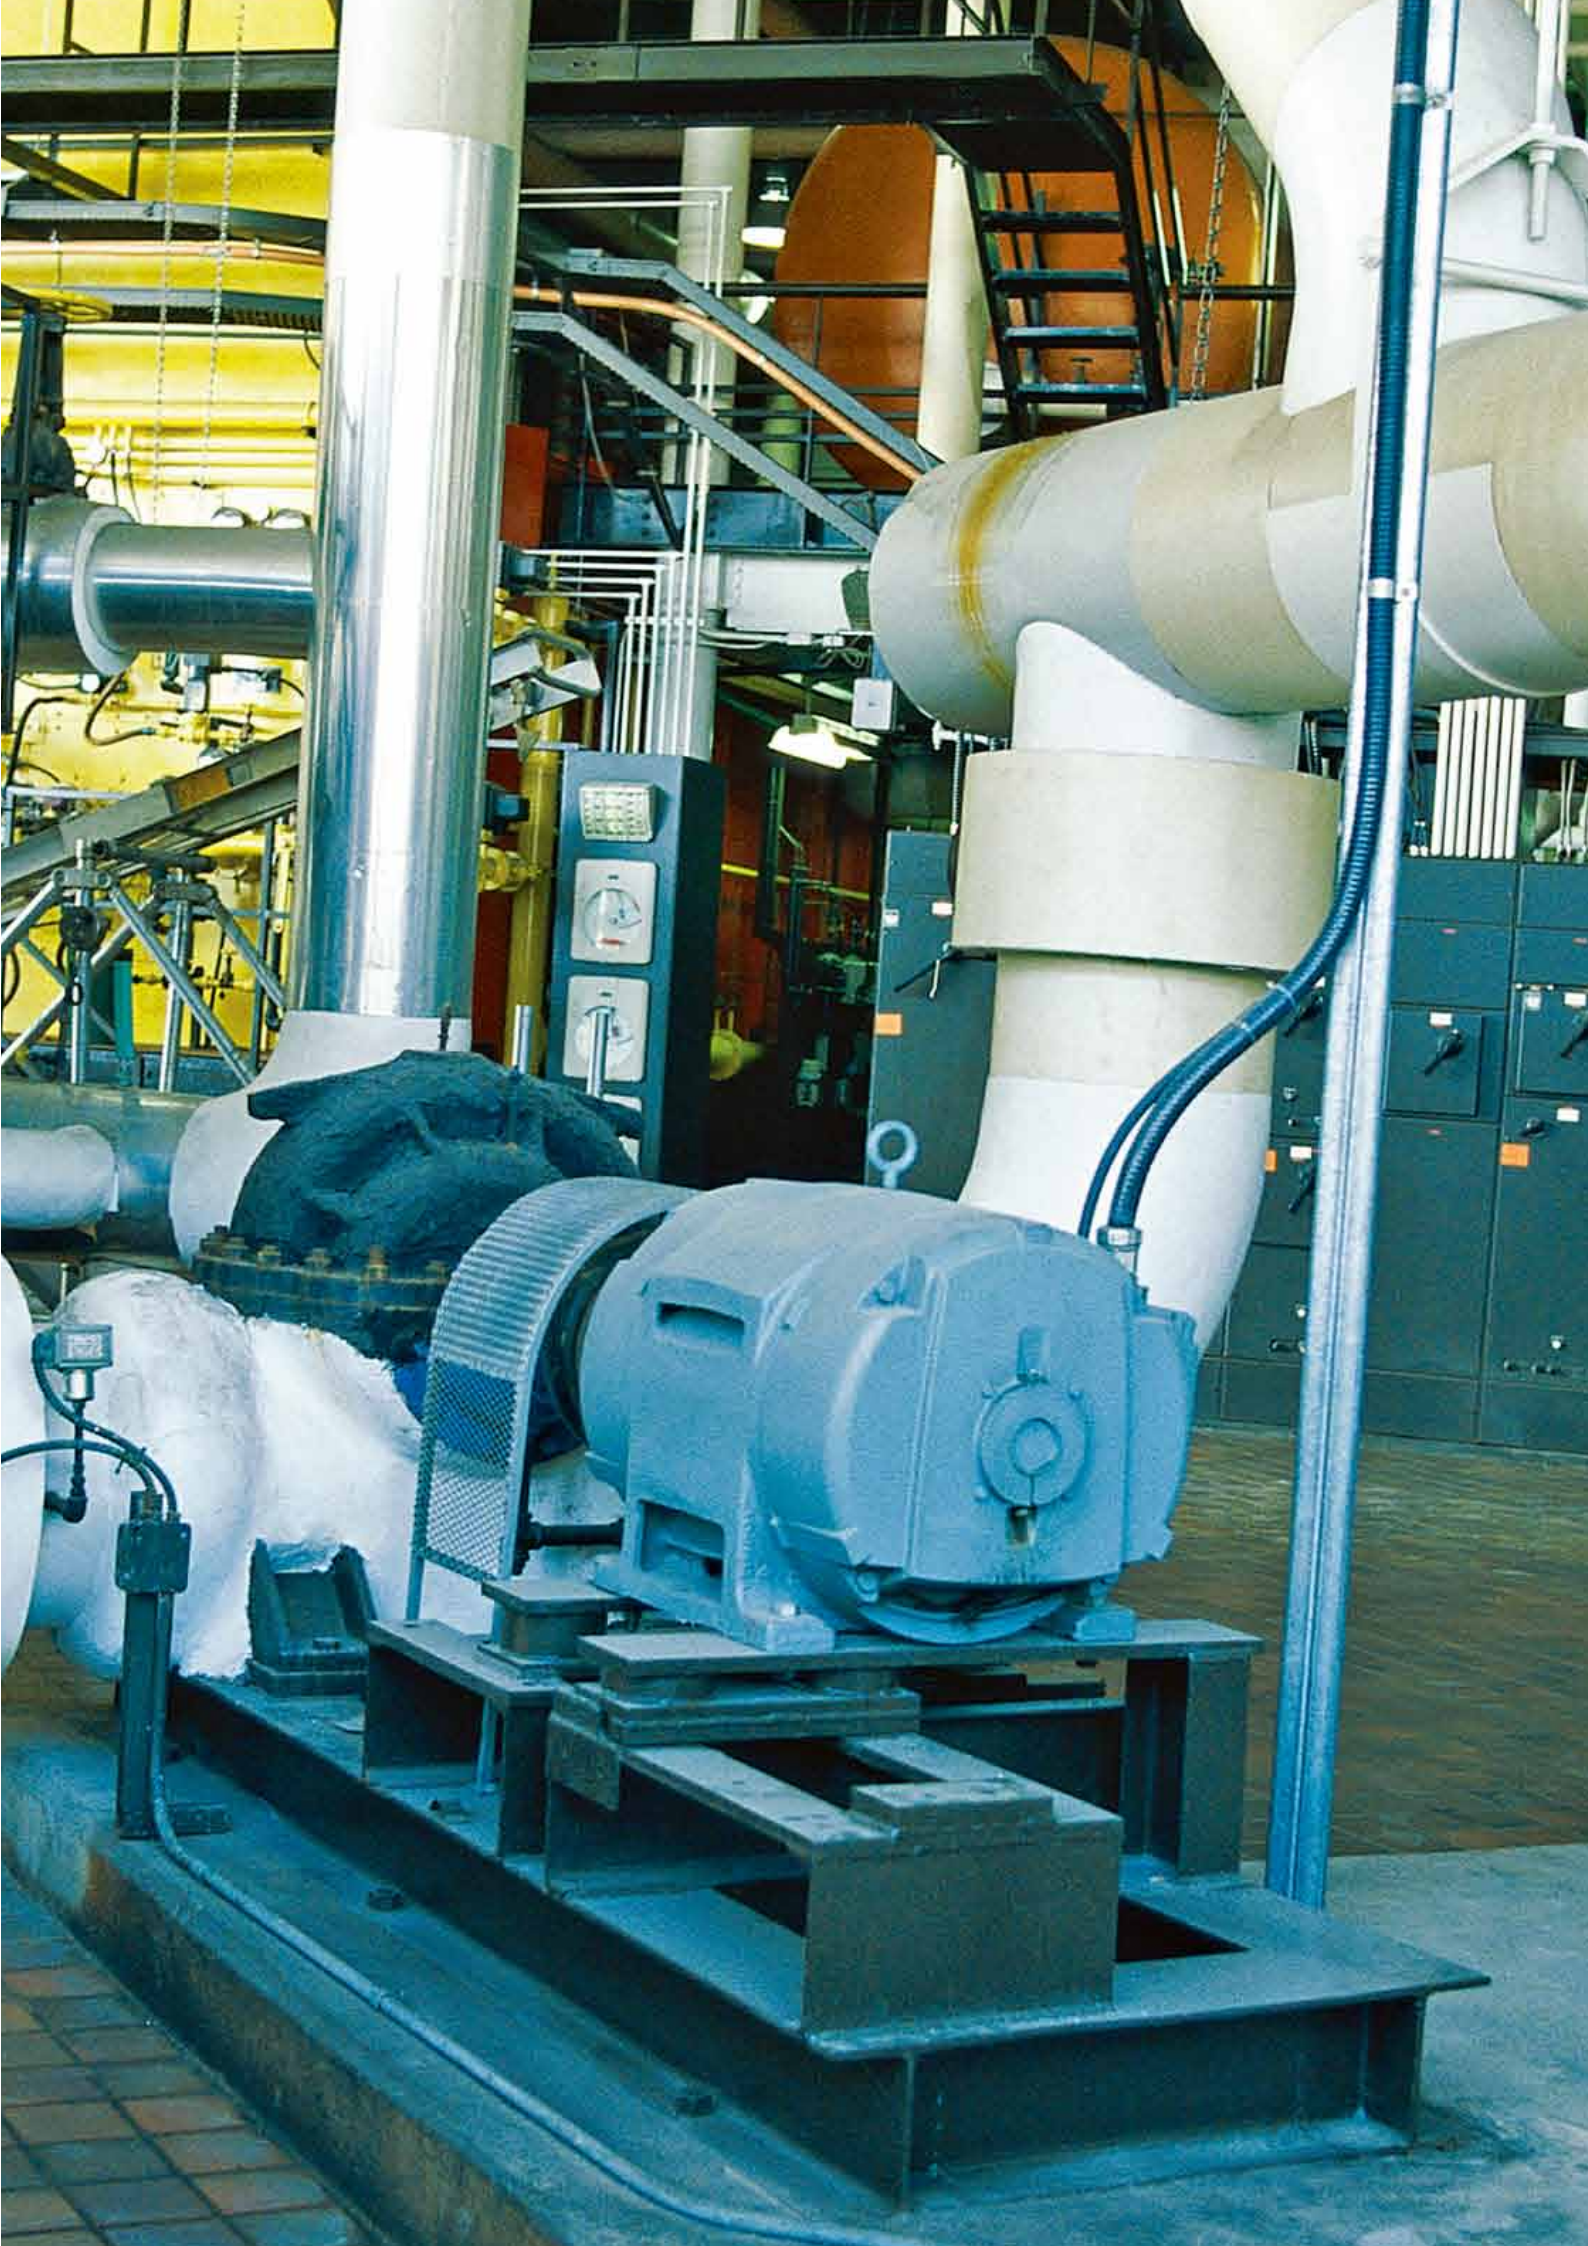

EasyPact TVS control relays

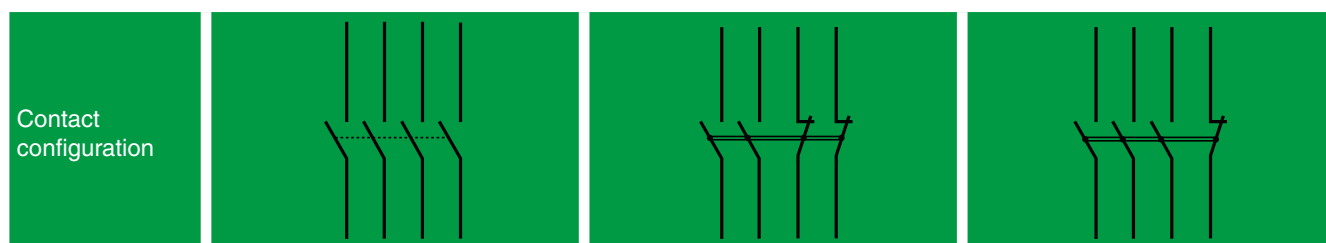

Coil V AC/Hz	50 Hz	50 Hz	50 Hz
24	CAE40B5	CAE22B5	CAE31B5
48	CAE40E5	CAE22E5	CAE31E5
110	CAE40F5	CAE22F5	CAE31F5
220	CAE40M5	CAE22M5	CAE31M5
240	CAE40U5	CAE22U5	CAE31U5
380	CAE40Q5	CAE22Q5	CAE31Q5
415	CAE40N5	CAE22N5	CAE31N5
440	CAE40R5	CAE22R5	CAE31R5

Characteristics

- > 4 NO/NC contacts.
- > Weight: 0.280 kg.

Control circuit characteristics				
Type			CAE~	
Rated control circuit voltage (Uc)	V		24...440	
Control voltage limits	Operation	Coil type: 50 Hz	0.85...1.1 Uc	
	Drop-out		0.3...0.6 Uc	
Average consumption at 20 °C and at Uc	~ 50 Hz		VA	Sealed and closed: 70 Maintain: 8
Operating time (rated control circuit voltage, ambient temperature 20 °C)	Between coil energisation and	opening of the N/C contact	ms	4...19
		closing of the N/O contact		12...22
	Between coil de-energisation and	opening of the N/C contact		4...12
		closing of the N/O contact		6...17
Momentary supply failure	Maximum power-off time without influencing sealed state		2	
Maximum operating rate	Operating cycles per second		3	
Mechanical durability In millions of operating cycles	Coil type:	50 Hz	10	
Control connection (coil)				
Connecting to screw clamp terminals	Flexible cable without cable end	1 conductor	mm ²	1...2.5
		2 conductors		1...2.5
	Flexible cable with cable end	1 conductor		1...2.5
		2 conductors		1...2.5
	Solid cable without cable end	1 conductor		1...2.5
		2 conductors		1...2.5
Tightening torque	N.m		1.2	
Characteristics of built in instantaneous contacts				
Number of contacts			4	
Rated operational voltage (Ue)	Up to		V	690
Rated insulation voltage (Ui)	Conforming to IEC 60947-5-1			690
Conventional thermal current (Ith)	Operational environment temperature ≤ 40 °C		A	10
Operating current frequency			Hz	50
Minimum switching capacity	U min		V	17
	I min		mA	5
Short-circuit protection	Conforming to IEC 60947-5-1		A	gG fuse: 10 A
Rated making capacity	Conforming to IEC 60947-5-1		A	~: 140
Short-time rating	Permissible for		A	120
	500 ms 100 ms			140
Insulation resistance			MΩ	> 10
Non-overlap time	Guaranteed non-overlap between N/C and N/O contacts		ms	1.5 on energisation and on de-energisation
Tightening torque	Phillips n 2		N.m	1.2
Non-overlap distance			Contact LAEN●● connecting with auxiliary contacts	
Instantaneous contacts connection				
Connecting to screw clamp terminals	Flexible cable without cable end	1 conductor	mm ²	1...2.5
		2 conductors		1...2.5
	Flexible cable with cable end	1 conductor		1...2.5
		2 conductors		1...2.5
	Solid cable without cable end	1 conductor		1...2.5
		2 conductors		1...2.5
Tightening torque	N.m		1.2	


Environment			
Type			CAE~
Rated insulation voltage (Ui)	Conforming to IEC 60947-5-1	V	690
Rated impulse withstand voltage (Uimp)	Conforming to IEC 60947	kV	6
Electrical insulation	IEC 60536		Up to 400 V reinforced insulation
Conforming to standards			IEC 60947-5-1
Certifications			GOST
Protective treatment	Conforming to IEC 60068		"TH"
Degree of protection	Conforming to IEC 60529		IP20
Ambient air temperature around the device	Storage	°C	-60...+80
	0.85... 1.1 UC		-5...+55
	For operation at Uc		-20...+70
Maximum operating altitude	Without derating	m	3000
Operating position	Without derating in the following positions		
Shock resistance ⁽¹⁾ 1/2 sine wave, 11 ms	Control relay open		7 gn
	Control relay closed		10 gn
Vibration resistance ⁽¹⁾ 5...300 Hz	Control relay open		1.5 gn
	Control relay closed		3 gn

(1) No change of contact state at coil voltage U_e in worst conditions.

EasyPact TVS control relays

Auxiliary contact blocks

RC suppressor

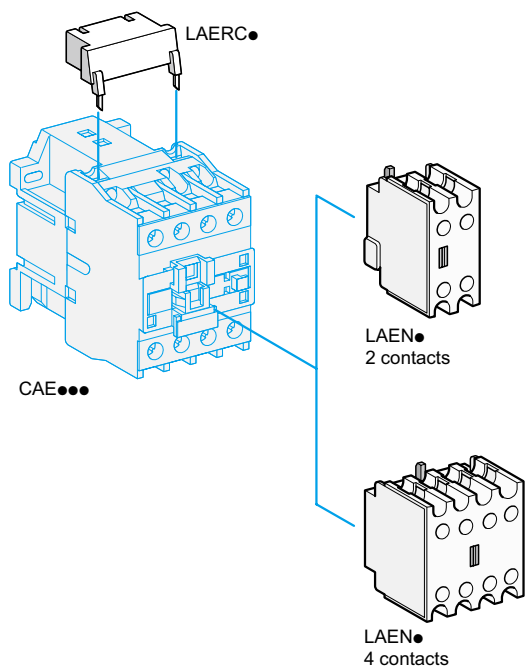

Instantaneous auxiliary contact blocks

For use in normal operating environments

Number of contacts	Maximum number of relays that can be mounted		Composition		Cat. no.	Weight kg
	Front mounted	Side mounted	NO	NC		
2	1	-	1	1	LAEN11	0.030
	1	-	2	-	LAEN20	0.030
	1	-	-	2	LAEN02	0.030
4	1	-	2	2	LAEN22	0.050


Coil suppressor modules

RC suppressor

- > Effective protection for circuits highly sensitive to «high frequency» interference and transient generates when the contactor coil is switched off. For use only in cases where the voltage is virtually sinusoidal, i.e. less than 5 % total harmonic distortion.
- > Voltage limited to 3 Uc max. and oscillating frequency limited to 400 Hz max.
- > Slight increase in drop-out time (1.2 to 2 times the normal time).

Mounted on	Operational voltage	Cat. no.	Weight kg
CAE40●●	~24...48 V	LAERCE	0.012
	~110...240 V	LAERCU	0.012
	~50...120 V	LAERCG	0.012
	~380...415 V	LAERCN	0.012


CAE●●

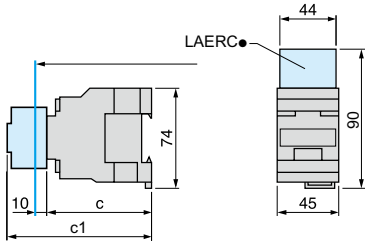

CAE	32	50
c	80	80
c1 with LAEN	113	113


CAE

On mounting plate AM1-P

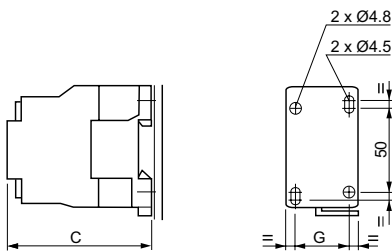


	CAE~
c	80
G	35


CAE40



CAE31



CAE22






Protection components

Thermal-magnetic motor circuit-breakers

GZ1 E

Presentation



GZ1 E motor circuit-breakers are 3-pole thermal-magnetic circuit-breakers specifically designed for the control and protection of motors, conforming to standards IEC 60947-2 and IEC 60947-4-1.

Connection

These circuit-breakers are designed for connection by screw clamp terminals. This technique ensures secure, permanent and durable clamping that is resistant to harsh environments, vibration and impact and is even more effective when conductors without cable ends are used. Each connection can take two independent conductors.

Pushbutton control.

Energisation is controlled manually by operating the Start button "I" 1. De-energisation is controlled manually by operating the Stop button "O" 2, or automatically by the thermal-magnetic protection elements or by a voltage trip attachment.

Protection of motors and personnel

Motor protection is provided by the thermal-magnetic protection elements incorporated in the motor circuit-breaker.

The magnetic elements (short-circuit protection) have a non-adjustable tripping threshold, which is equal to about 13 times the maximum setting current of the thermal trips.

The thermal elements (overload protection) include automatic compensation for ambient temperature variations.

The rated operational current of the motor is displayed by means of a graduated knob 3.

Personnel protection is also provided. All live parts are protected against direct finger contact.

GZ1 E motor circuit-breakers are easily installed in any configuration thanks to their universal fixing arrangement: screw fixing or clip-on mounting on symmetrical, asymmetrical or combination rails.

Environment

Circuit-breaker type		GZ1 E	
Conforming to standards		IEC 60947-2, IEC 60947-4	
Protective treatment		"TH"	
Degree of protection		In GV2 MC01 enclosure: IP 41 In GV2 MC02 enclosure: IP 55	
Ambient air temperature	Storage	°C	- 40...+ 80
	Operation		- 20...+ 60
Flame resistance	Conforming to IEC 60695-2-1	°C	960
Maximum operating altitude		m	2000
Cabling		Min.	Max.
Number of conductors and c.s.a.	Solid cable	mm ²	2 x 1 2 x 6
	Flexible cable without cable end	mm ²	2 x 1.5 2 x 6
	Flexible cable with cable end	mm ²	2 x 1 2 x 4
Suitable for isolation	Conforming to IEC 60947-1 § 7-1-6		Yes
Tightening torque		N.m	1,7
Rated operational voltage (Ue)	Conforming to IEC 60947-2	V	690
Rated insulation voltage (Ui)	Conforming to IEC 60947-2	V	690
Rated operational frequency	Conforming to IEC 60947-2	Hz	50/60
Rated impulse withstand voltage (U imp)	Conforming to IEC 60947-2	kV	6
Total power dissipated per pole		W	2.5
Mechanical durability (C.O.: closing, opening)		C.O.	100 000
Electrical durability For AC-3 duty		CF.O.	100 000
Duty class (maximum operating rate)		C.O./h	25

Protection components

Thermal-magnetic motor circuit-breakers

GZ1 E


Breaking capacity

Circuit-breaker type			GZ1 E									
			01 to 06	07	08	10	14	16	20	21	22 to 32	
Rating		A	0.1 to 1.6	2,5	4	6.3	10	14	16	20	23	25 to 32
Breaking capacity conforming to IEC 60947-2	230/240 V	Icu	kA	★	★	★	★	★	★	★	30	30
		Ics % ⁽¹⁾		★	★	★	★	★	★	★	100	100
	400/415 V	Icu	kA	★	★	★	★	★	10	10	10	10
		Ics % ⁽¹⁾		★	★	★	★	★	50	50	40	40
	440 V	Icu	kA	★	★	★	30	10	6	6	5	5
		Ics % ⁽¹⁾		★	★	★	100	100	50	50	50	50
	500 V	Icu	kA	★	★	★	30	8	5	5	3	3
		Ics % ⁽¹⁾		★	★	★	100	100	75	75	75	75
	690 V	Icu	kA	★	2	2	2	2	2	2	2	2
		Ics % ⁽¹⁾		★	75	75	75	75	75	75	75	75

★ > 100 kA.
(1) As % of Icu.

Tripping curves

Average operating times at 20 °C related to multiples of the setting current

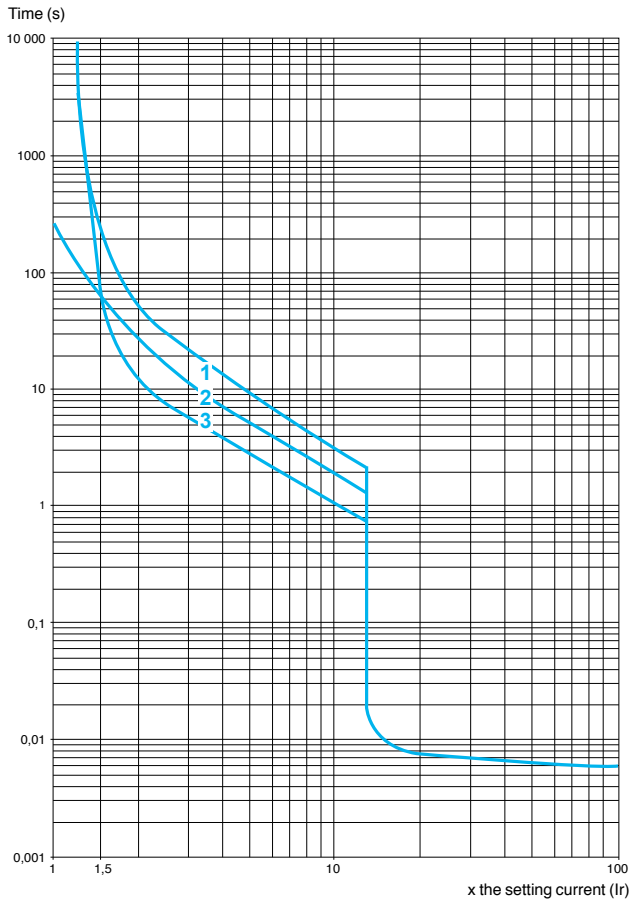

- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Protection components

Thermal-magnetic motor circuit-breakers

GZ1 E




GZ1 E

Motor circuit-breakers								
Pushbutton control								
Standard power ratings of 3-phase motors 50/60 Hz in category AC-3					Setting range of thermal trips	Magnetic tripping current $I_d \pm 20\%$	Reference	Weight
230 V	400 V	440 V	500 V	690 V	A	A		kg
–	–	–	–	–	0.1...0.16	1.5	GZ1 E01	0.260
–	–	–	–	–	0.16...0.25	2.4	GZ1 E02	0.260
–	–	–	–	–	0.25...0.40	5	GZ1 E03	0.260
–	–	–	–	0.37	0.40...0.63	8	GZ1 E04	0.260
–	–	–	0.37	0.55	0.63...1.0	13	GZ1 E05	0.260
–	0.37	0.55	0.75	1.1	1...1.6	22.5	GZ1 E06	0.260
0.37	0.75	1.1	1.1	1.5	1.6...2.5	33.5	GZ1 E07	0.260
0.75	1.5	1.5	2.2	3	2.5...4	51	GZ1 E08	0.260
1.1	2.2	3	3.7	4	4...6.3	78	GZ1 E10	0.260
2.2	4	4	5.5	7.5	6...10	138	GZ1 E14	0.260
–	5.5	5.5	9	11	9...14	170	GZ1 E16	0.260
4	7.5	9	10	15	13...18	223	GZ1 E20	0.260
5.5	9	11	11	18.5	17...23	327	GZ1 E21	0.260
5.5	11	11	15	22	20...25	327	GZ1 E22	0.260
7.5	15	15	18.5	22	24...32	416	GZ1 E32	0.260


Protection components

Thermal-magnetic motor circuit-breakers

GZ1 E



GZ1 AN11



GZ1 AS115

Contact blocks

Instantaneous auxiliary contacts


Mounting	Maximum number	Type of contacts	Sold in lots of	Unit reference	Weight kg
Side	2	N/O + N/C	1	GZ1 AN11	0.050
LH side		N/O + N/O	1	GZ1 AN20	0.050

Electric trips



Montage	Type	Tension		Reference	Weight kg
Side (1 block on RH side of circuit- breaker)	Undervoltage trip	110...115 V	50 Hz	GZ1 AU115	0.105
		220...240 V	50 Hz	GZ1 AU225	0.105
		380...400 V	50 Hz	GZ1 AU385	0.105
	Shunt trip	110...115 V	50 Hz	GZ1 AS115	0.105
		220...240 V	50 Hz	GZ1 AS225	0.105

Mounting accessory


Description	Application	Sold in lots of	Unit reference	Weight kg
Adapter plate	For screw fixing of a GZ1 E	10	GV2 AF02	0.021

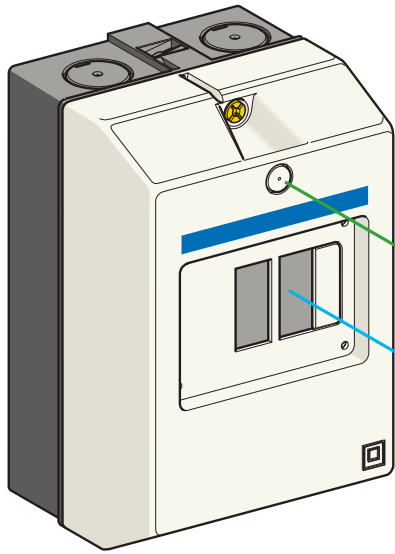



GV2 MC

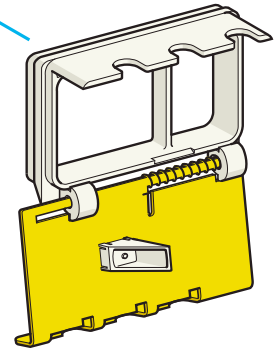


GV2 V01

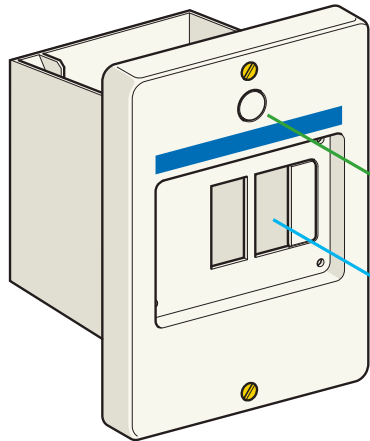



GV2 MP




GV2 K011

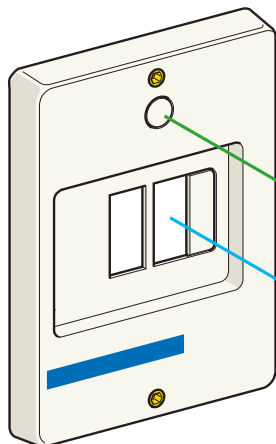

GV2 CP



GV2 E01



GV2 SN

Protection components

Thermal-magnetic motor circuit-breakers

GZ1 E

Enclosures for thermal-magnetic circuit-breakers GZ1 E

Type	Degree of protection	Reference	Weight kg
Surface mounting, double insulated, with protective earth Sealable cover	IP 41	GV2 MC01	0.290
	IP 55	GV2 MC02	0.300
Flush mounting, with protective earth	IP 41 (front face)	GV2 MP01	0.115
	IP 55 (front face)	GV2 MP02	0.130

Front plate

Description	Degree of protection	Sold in lots of	Unit reference	Weight kg
For direct control, through a panel, of a chassis mounted GZ1 E	IP 55	1	GV2 CP21	0.800

Accessories common to all enclosures (to be ordered separately)

Padlocking device ⁽¹⁾ for GZ1 E operator (padlocking is only possible in the "O" position)	1 to 3 padlocks Ø 4 to 8 mm	1	GV2 V01	0.075
Mushroom head "Stop" pushbutton, Ø 40 mm, red	Spring return ⁽¹⁾	1	GV2 K011	0.052
Sealing kit	For enclosures and front plate IP 55	10	GV2 E01	0.012
Neutral terminal		100	AB1 VV635UBL	0.015
Partition		50	AB1 AC6BL	0.003

Description	Voltage V	Colour	Sold in lots of	Unit reference	Weight kg
Pilot light with neon bulb	380/440	Green	10	GV2 SN33	0.019
		Red	10	GV2 SN34	0.019
		Orange	10	GV2 SN35	0.019
		Clear	10	GV2 SN37	0.019

⁽¹⁾Supplied with IP 55 sealing kit. To be fitted with enclosures GV2 M●01.

Protection components


Thermal-magnetic motor circuit-breakers

GZ1 E

Dimensions

GZ1 E

GZ1 AN, GZ1 AU, GZ1 AS

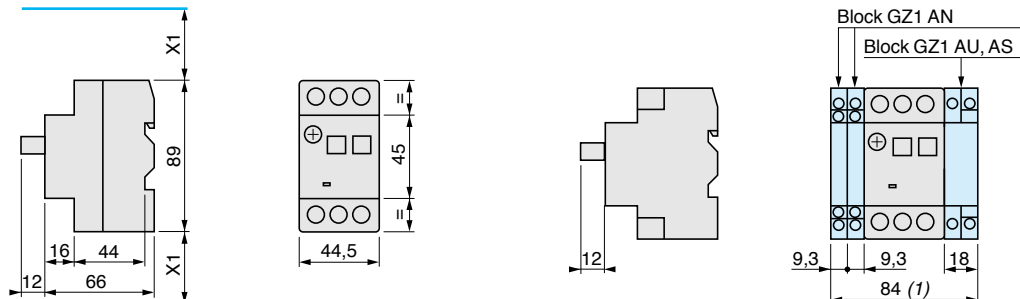


X1: electrical clearance = 40 mm for Ue y 690 V.

(1) max.

Mounting


GZ1 E on 35 mm ≤ rail

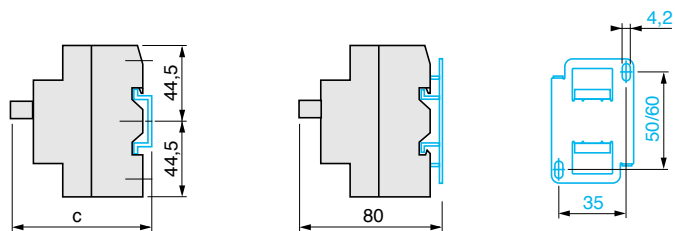


c = 78.5 on AM1 DP200 (35 x 7.5).

c = 86 on AM1 DE200 and AM1 ED200 (35 x 15).

GZ1 E on pre-slotted mounting plate



GZ1 E on rails DZ5 MB201, DZ5 ME8 or GV2 AF02




Protection components

Thermal-magnetic motor circuit-breakers GZ1 E, in enclosure


Dimensions

Surface mounting enclosure GV2 MC0●

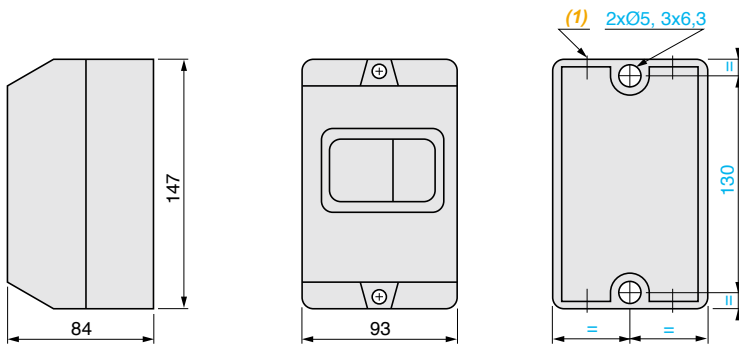


(1) 4 knock-outs for 16 mm plastic cable gland or 16 mm conduit.

Front plate GV2 CP21

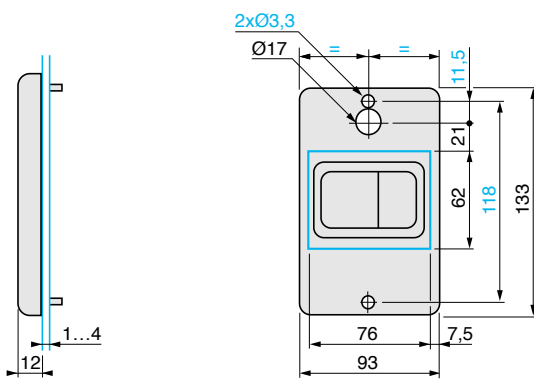

Flush mounting enclosures GV2 MP01 and GV2 MP02

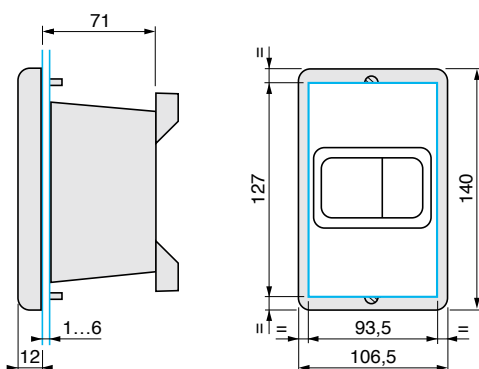

Coordination between protection & control components

Coordination: safety and faster restart after a short circuit

This benefit is obtained by choosing contactors with Schneider Electric guaranteed coordination.

What exactly is coordination?

A contactor is said to be "coordinated" with the upstream protection device when its behaviour is controlled in the event of a short circuit.

This behaviour can be:

- > type 1: guaranteed not to pose a danger to the workforce and not to damage the installation. It is accepted that the contactor should be destroyed or repaired.
- > type 2: type 1 + put back into service possible after any maintenance operation (contact separation, for example).

Compliance tests

Only the very stringent certified tests performed by Schneider Electric can guarantee the behaviour described by IEC 60947-4-1.

Type 2 Co-ordination Chart

EasyPact TVS DOL type 2 Co-ordination chart with fuse

Standard : IEC 60947-4-1
 Fuses : Bussmann Cooper
 Iq (A) : 50KA
 Ue : 415Vac / 50Hz
 Contactor Coil : Type M5 (220Vac / 50 Hz)

Motor output		FLC	SDF (NX range)			Contactor		Thermal overload relay	
KW	HP	I(A)	Type	Fuse type	Fuse rating (A)	Type	AC3 (A)	Type	Range (A)
0.37	0.5	1	NX32	6NHG000B	6	LC1E09	9	LRE06	1.0 - 1.6
0.55	0.75	1.5	NX32	6NHG000B	6	LC1E09	9	LRE06	1.0 - 1.6
0.75	1	2	NX32	6NHG000B	6	LC1E09	9	LRE07	1.6 - 2.5
1.5	2	3.5	NX32	16NHG000B	16	LC1E09	9	LRE08	2.5 - 4.0
2.2	3	5	NX32	16NHG000B	16	LC1E09	9	LRE10	4.0 - 6.0
3	4	6.8	NX32	20NHG000B	20	LC1E09	9	LRE12	5.5 - 8.0
4	5.5	8.4	NX32	20NHG000B	20	LC1E09	9	LRE14	7.0 - 10
5.5	7.5	11.2	NX32	25NHG000B	25	LC1E12	12	LRE16	9.0 - 13
7.5	10	14	NX63	40NHG000B	40	LC1E18	18	LRE21	12.0 - 18
9	12	18	NX63	50NHG000B	50	LC1E25	25	LRE22	16 - 24
11	15	21	NX63	50NHG000B	50	LC1E32	32	LRE22	16 - 24
15	20	28.5	NX63	63NHG000B	63	LC1E32	32	LRE32	23 - 32
18.5	25	34	NX80	80NHG000B	80	LC1E40	40	LRE355	30 - 40
22	30	42	NX80	80NHG000B	80	LC1E50	50	LRE357	37 - 50
30	40	57	NX100	100NHG000B	100	LC1E65	65	LRE359	48- 65
37	50	70	NX125	125NHG00B	125	LC1E80	80	LRE363	63- 80
45	60	81	NX160	160NHG00B	160	LC1E95	95	LRE365	80- 104
56	75	100	NX160	160NHG00B	160	LC1E120	120	LRE482	84- 135
80	107	138	NX250	250NHG1B	250	LC1E160	160	LRE483	124- 198
90	120	165	NX250	250NHG1B	250	LC1E160	160	LRE483	124- 198
100	135	182	NX315	315NHG2B	315	LC1E200	200	LRE483	124- 198
110	150	196	NX315	315NHG2B	315	LC1E200	200	LRE483	124- 198
132	177	240	NX400	355NHG2B	355	LC1E250	250	LRE485	174- 279
160	215	285	NX400	400NHG2B	400	LC1E300	300	LRE486	208- 333

Type 2 Co-ordination chart

EasyPact TVS DOL type 2 Co-ordination chart with MCCB & MPCB

Standard : IEC 60947-4-1
 Iq (A) : 50KA
 Ue : 415Vac / 50Hz
 Contactor Coil : Type M5 (220Vac / 50 Hz)

Motor output		FLC	MCCB				Contactor	Thermal overload relay	
KW	HP	I(A)	Type	Range (A)	Setting	Irm (A)	Type	Type	Range
30	40	57.0	CVS100-MA	100	6---14	900	LC1E120	LRE480	51---81
37	50	70.0	CVS100-MA	100	6---14	1100	LC1E120	LRE481	62---99
45	60	81.0	CVS100-MA	100	6---14	1300	LC1E120	LRE481	62---99
56	75	100.0	CVS160-MA	160	9---14	1500	LC1E160	LRE482	84---135
80	107	138.0	CVS160-MA	160	9---14	1950	LC1E160	LRE483	124---198
90	120	165.0	CVS250-MA	220	9---14	2420	LC1E300	LRE484	146---234
100	135	182.0	CVS250-MA	220	9---14	2420	LC1E300	LRE484	146---234
110	150	196.0	CVS250-MA	220	9---14	2860	LC1E300	LRE484	146---234
140	188	250.0	CVS400-MA	320	6---13	3500	LC1E300	LRE485	174---279
160	215	285.0	CVS400-MA	320	6---13	4160	LC1E300	LRE486	208---333
180	250	320.0	CVS400-MA	320	6---13	5700	LC1E300	LRE486	208---333

Note:
 For Star-Delta Starter
 Main Contactor 2 nos & Star Contactor 1 nos as per above KW rating

Standard : IEC 60947-4-1
 Iq (A) : 50 kA
 Ue : 440V
 Contactor Coil : Type M5 (220Vac/50Hz)

Motor Rating kW	Operational Current in A	Iq	Motor Circuit Breaker	Thermal Range	Contactor
0.06	0.19	100	GZ1E02	0.16...0.25	LC1-E09
0.09	0.28	100	GZ1E03	0.25...0.4	LC1-E09
0.12	0.37	100	GZ1E03	0.25...0.4	LC1-E09
0.18	0.55	100	GZ1E04	0.4...0.63	LC1-E09
0.25	0.76	100	GZ1E05	0.63...1	LC1-E09
0.37	0.99	100	GZ1E05	0.63...1	LC1-E09
0.55	1.36	100	GZ1E06	1...1.6	LC1-E09
0.75	1.68	100	GZ1E07	1.6...2.5	LC1-E09
1.1	2.37	100	GZ1E07	1.6...2.5	LC1-E09
1.5	3.06	100	GZ1E08	2.5...4	LC1-E25
2.2	4.42	30	GZ1E10	4...6.3	LC1-E25
3	5.77	30	GZ1E10	4...6.3	LC1-E25
4	7.9	10	GZ1E14	6...10	LC1-E25
5.5	10.4	6	GZ1E16	9...14	LC1-E32
7.5	13.7	6	GZ1E16	9...14	LC1-E40
9	16.9	6	GZ1E20	13...18	LC1-E40
11	20.1	5	GZ1E21	17...23	LC1-E65
15	26.5	5	GZ1E32	24...32	LC1-E65

Type 2 Co-ordination Chart


EasyPact TVS Star-Delta type 2

Co-ordination Chart with Fuse

Standard : IEC 60947-4-1
 Fuses : Bussmann Cooper
 Iq (A) : 50KA
 Ue : 415Vac / 50Hz
 Contactor Coil : Type M5 (220Vac / 50 Hz)

Motor output		FLC		SDF (NX Range)			Contactor				Thermal overload relay	
KW	HP	I line (A)	I phase (A)	Type	Fuse type	Fuse rating (A)	Star contactor	AC3- A	Main/Delta contactor	AC3- A	Type	Range (A)
1.5	2	4	2.3	NX32	10NHC00G	10	LC1E09	9	LC1E09	9	LRE07	1.6-2.5
2.2	3	5	3	NX32	16NHC00G	16	LC1E09	9	LC1E09	9	LRE08	2.5-4
3	4	7	4	NX32	16NHC00G	16	LC1E09	9	LC1E09	9	LRE08	2.5-4
4	5.3	9	5	NX32	20NHC00G	20	LC1E09	9	LC1E09	9	LRE10	4-6
5.5	7.5	10	6	NX32	20NHC00G	20	LC1E09	9	LC1E09	9	LRE12	5.5-8
7.5	10	16	9	NX32	32NHC00G	32	LC1E09	9	LC1E09	9	LRE14	7-10
9	12	17	10	NX32	32NHC00G	32	LC1E09	9	LC1E12	12	LRE14	7-10
11	15	21	12	NX63	50NHC00G	50	LC1E12	12	LC1E12	12	LRE16	9-13
15	20	28	16	NX63	63NHC00G	63	LC1E18	18	LC1E18	18	LRE21	12-18
22	30	42	24	NX63	80NHC00G	80	LC1E25	25	LC1E25	25	LRE32	23-32
30	40	57	33	NX125	100NHG00B	100	LC1E40	40	LC1E40	40	LRE355	30-40
45	60	81	47	NX125	125NHG00B	125	LC1E40	40	LC1E50	50	LRE357	37-50
55	75	100	58	NX125	125NHG00B	125	LC1E40	40	LC1E65	65	LRE359	48-65
80	107	139	80	NX200	200NHG1B	200	LC1E80	80	LC1E80	80	LRE363	63-80
110	150	196	113	NX315	315NHG2B	315	LC1E300	300	LC1E300	300	LRE482	84-135
160	215	286	165	NX400	355NHG2B	355	LC1E300	300	LC1E300	300	LRE483	124-198

Glossary

Altitude	<p>The rarefied atmosphere at high altitude reduces the dielectric strength of the air and hence the rated operational voltage of the contactor. It also reduces the cooling effect of the air and hence the rated operational current of the contactor (unless the temperature drops at the same time). No derating is necessary up to 3000 m.</p> <p>Derating factors to be applied above this for main pole operational voltage and current (a.c. supply) are as follows:</p> <table border="1"> <thead> <tr> <th>Altitude</th> <th>3500m</th> <th>4000m</th> <th>4500m</th> <th>5000m</th> </tr> </thead> <tbody> <tr> <td>Rated operational voltage</td> <td>0.90</td> <td>0.80</td> <td>0.70</td> <td>0.60</td> </tr> <tr> <td>Rated operational current</td> <td>0.92</td> <td>0.90</td> <td>0.88</td> <td>0.86</td> </tr> </tbody> </table>	Altitude	3500m	4000m	4500m	5000m	Rated operational voltage	0.90	0.80	0.70	0.60	Rated operational current	0.92	0.90	0.88	0.86
Altitude	3500m	4000m	4500m	5000m												
Rated operational voltage	0.90	0.80	0.70	0.60												
Rated operational current	0.92	0.90	0.88	0.86												
Ambient air temperature	<p>The temperature of the air surrounding the device, measured near to the device. The operating characteristics are given:</p> <ul style="list-style-type: none"> > with no restriction for temperatures between -5 and +55 °C > with restrictions, if necessary, for temperatures between -40 and +70 °C. 															
Rated operational current (Ie)	This is defined taking into account the rated operational voltage, operating rate, utilisation category and ambient temperature around the device.															
Conventional thermal current (Ith) ⁽¹⁾	The current which a closed contactor can sustain for a minimum of 8 hours without its temperature rise exceeding the limits given in the standards.															
Permissible short-time rating	The current which a closed contactor can for a short time after a period of no load, without dangerous overheating.															
Rated operational voltage (Ue)	This is the voltage value which, in conjunction with the rated operational current, determines the use of the contactor or starter, and on which the corresponding tests and the utilisation category are based. For 3-phase circuits, it is expressed as the voltage between phases.															
Rated control circuit voltage (Uc)	The rated value of the control circuit voltage, on which the operating characteristics are based. For a.c. applications, the values are given for a sinusoidal wave form (less than 5% total harmonic distortion).															
Rated insulation voltage (Ui)	This is the voltage value used to define the insulation characteristics of a device and referred to in dielectric tests determining leakage paths. As the specifications are not identical for all standards, the rated value given for each of them is not necessarily the same.															
Rated impulse withstand voltage (Uimp)	The peak value of a voltage surge which the device is able to withstand without breaking down.															
Rated operational power (expressed in kW)	The rated power of the standard motor which can be switched by the contactor, at the rated operational voltage.															
Rated breaking capacity ⁽²⁾	This is the current value which the contactor can break in accordance with the breaking conditions specified in the IEC standard.															
Rated making capacity ⁽²⁾	This is the current value which the contactor can make in accordance with the making conditions specified in the IEC standard.															
On-load factor (m)	<p>This is the ratio between the time the current flows (t) and the duration of the cycle (T).</p>  <p>$m = t/T$</p> <p>Cycle duration: duration of current flow + time at zero current.</p>															
Pole impedance	The impedance of one pole is the sum of the impedance of all the circuit components between the input terminal and the output terminal. The impedance comprises a resistive component (R) and an inductive component ($X = L\omega$). The total impedance therefore depends on the frequency and is normally given for 50 Hz. This average value is given for the pole at its rated operational current.															
Electrical durability	This is the average number of on-load operating cycles which the main pole contacts can perform without maintenance. The electrical durability depends on the utilisation category, the rated operational current and the rated operational voltage.															
Mechanical durability	This is the average number of no-load operating cycles (i.e. with zero current flow through the main pole) which the contactor can perform without mechanical failure.															

⁽¹⁾ Conventional thermal current, in free air, conforming to IEC standards.
⁽²⁾ For a.c. applications, the breaking and making capacities are expressed by rms value of the symmetrical component of the short-circuit current. Taking into account the maximum asymmetry which may exist in the circuit, the contacts therefore have to withstand a peak asymmetrical current which may be twice the rms symmetrical component.

Note: these definitions are extracted from standard IEC 60947-1.

Contactor utilisation categories conforming to IEC 60947-4

The standard utilisation categories define the current values which the contactor must be able to make or break.

These values depend on:

- > the type of load being switched: squirrel cage or slip ring motor, resistors
- > the conditions under which making or breaking takes place: motor stalled, starting or running, reversing, plugging.

a.c. applications

> Category AC-1:

This category applies to all types of a.c. load with a power factor equal to or greater than 0.95.

Examples: heating, lighting, distribution.

> Category AC-3:

This category applies to squirrel cage motors with breaking during normal running of the motor. On closing, the contactor makes the starting current, which is about 7 times the rated current of the motor.

On opening, it breaks the rated current drawn by the motor; at this point, the voltage at the contactor terminals is about 20 % of the mains supply voltage. Breaking is light.

For example: all standard squirrel cage motors: lifts, escalators, conveyor belts, bucket elevators, compressors, pumps, mixers, air condition units, etc...

> Category AC-4:

The contactor closes at a current peak which may be as high as 5 or 7 times the rated motor current. On opening it breaks this same current at a voltage which is higher, the lower the motor speed. This voltage can be the same as the mains voltage. Breaking is severe.

This category covers applications with plugging and inching of squirrel cage and slip ring motors.

For example: printing machines, wire drawing machines, cranes and hoists, metallurgy industry.

Technical information

Product standards and certifications

Standardisation

Conformity to standards

Schneider Electric products satisfy, in the majority of cases, European (for example: CENELEC) or international (IEC) standards. These product standards precisely define the performance of the designated products (such as IEC 60947 for low voltage equipment).

When used correctly, as designated by the manufacturer and in accordance with regulations and correct practices, these products will allow users to build equipment, machine systems or installations that conform to their appropriate standards (for example: IEC 60204-1, relating to electrical equipment used on industrial machines). Schneider Electric is able to provide proof of conformity of its production to the standards it has chosen to comply with, through its quality assurance system. On request, and depending on the situation, Schneider Electric can provide the following:

- > a declaration of conformity
- > a certificate of conformity (ASEFA/LOVAG)
- > a homologation certificate or approval, in the countries where this procedure is required or for particular specifications, such as those existing in the merchant navy.

Code	Certification authority		Country
	Name	Abbreviation	
GOST	Gosudarstvenne Komitet Standartov	GOST	Russia
IEC	International Electrotechnical Commission	IEC	Worldwide

Regulations

European Directives

Opening up of European markets assumes harmonisation of the regulations pertaining to each of the member countries of the European Union.

The purpose of the European Directive is to eliminate obstacles hindering the free circulation of goods within the European Union, and it must be applied in all member countries. Member countries are obliged to transcribe each Directive into their national legislation and to simultaneously withdraw any contradictory regulations. The Directives, in particular those of a technical nature which concern us, only establish the objectives to be achieved, referred to as "essential requirements".

The manufacturer must take all the necessary measures to ensure that his products conform to the requirements of each Directive applicable to his production.

As a general rule, the manufacturer certifies conformity to the essential requirements of the Directive(s) for his product by affixing the CE mark.

The CE mark is affixed to Schneider Electric brand products concerned, in order to comply with French and European regulations.

Significance of the CE mark

- > The e mark affixed to a product signifies that the manufacturer certifies that the product conforms to the relevant European Directive(s) which concern it; this condition must be met to allow free distribution and circulation within the countries of the European Union of any product subject to one or more of the E.U. Directives.
- > The e mark is intended solely for national market control authorities.
- > The e mark must not be confused with a conformity marking.

European Directives (continued)

For electrical equipment, only conformity to standards signifies that the product is suitable for its designated function, and only the guarantee of an established manufacturer can provide a high level of quality assurance.

For Schneider Electric brand products, one or several Directives are likely to be applicable, depending on the product, and in particular:

- > the Low Voltage Directive 2006/95/EC: the e mark relating to this Directive has been compulsory since 16th January 2007.
- > the Electromagnetic Compatibility Directive 89/336/EEC, amended by Directives 92/31/EEC and 93/68/EEC: the e mark on products covered by this Directive has been compulsory since 1st January 1996.

ASEFA-LOVAG certification

The function of ASEFA (Association des Stations d'Essais Française d'Appareils électriques - *Association of French Testing Stations for Low Voltage Industrial Electrical Equipment*) is to carry out tests of conformity to standards and to issue certificates of conformity and test reports. ASEFA laboratories are authorised by the French authorisation committee (COFRAC).

ASEFA is now a member of the European agreement group LOVAG (Low Voltage Agreement Group). This means that any certificates issued by LOVAG/ASEFA are recognised by all the authorities which are members of the group and carry the same validity as those issued by any of the member authorities.

Note

For further details on a specific product, please refer to the "Characteristics" pages in this catalogue or consult your Regional Sales Office.



Make the most of your energy SM

Schneider Electric India Pvt. Ltd.

Corporate office

9th Floor, DLF Building No.10, Tower C, DLF Cyber City,
Phase II, Gurgaon - 122002, Haryana
Tel: 0124 3940400, Fax: 0124 4222036
www.schneider-electric.co.in

Customer Care Centre :

Toll-free numbers: 1800 180 1707, 1800 103 0011,
General number: 0124 4222040,
Email: customercare.in@schneider-electric.com

