

LOW VOLTAGE CURRENT TRANSFORMER


RISHABH XMER PROTECTION SERIES



Data Sheet

PROTECTION CLASS CURRENT TRANSFORMER


PROTECTION SERIES

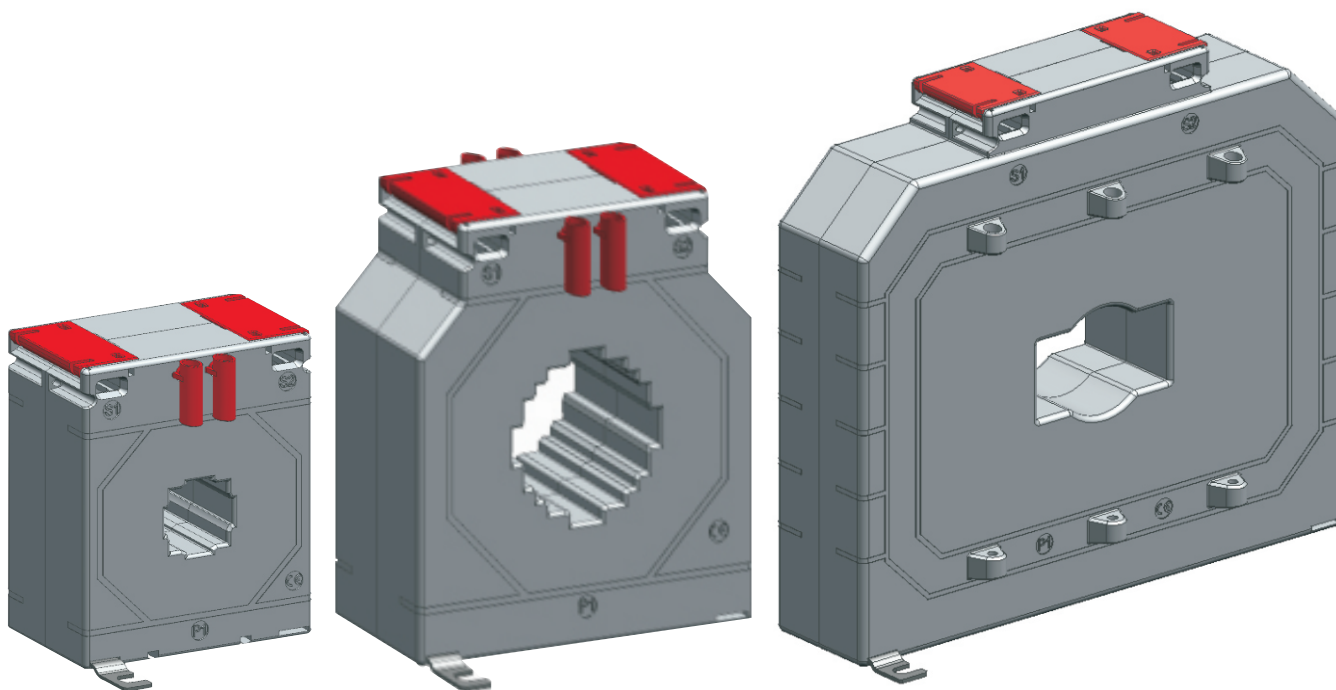


LOW VOLTAGE CURRENT TRANSFORMER

RISH XMER PROTECTION CLASS 62 SERIES

RISH XMER PROTECTION CLASS 62/R

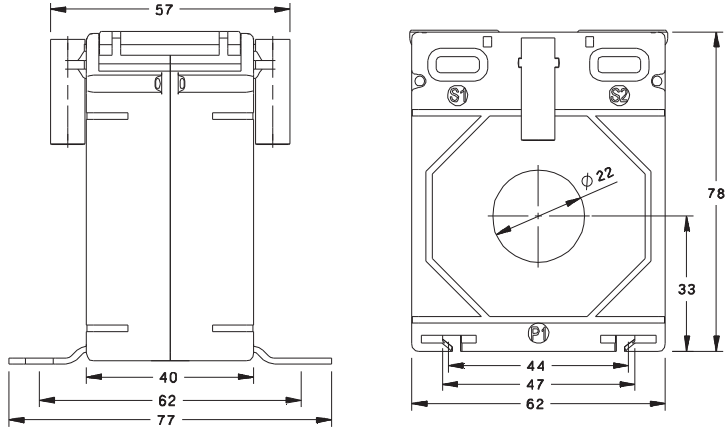

RISH XMER PROTECTION CLASS 62/20 (40)

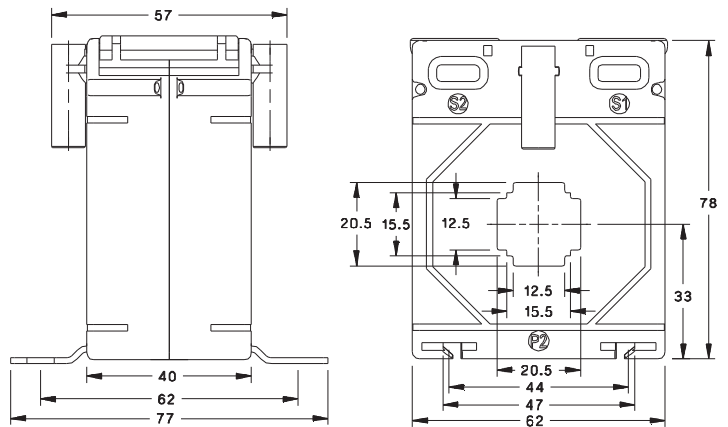

ALL DIMENSIONS ARE IN MM

Primary Current	RISH XMER 62/R	
	Accuracy	
	5P5	10P5
100A	-	1VA
125A	1VA	1VA
150A	1VA	1VA
200A	1VA	1VA
250A	1VA	1VA
300A	1VA	1.5VA



Primary Current	RISH XMER 62/20 (40)	
	Accuracy	
	5P5	10P5
100A	-	1VA
125A	1VA	1VA
150A	1VA	1VA
200A	1VA	1VA






LOW VOLTAGE CURRENT TRANSFORMER

RISH XMER PROTECTION CLASS 74 SERIES

RISH XMER PROTECTION CLASS 74/20 (45)

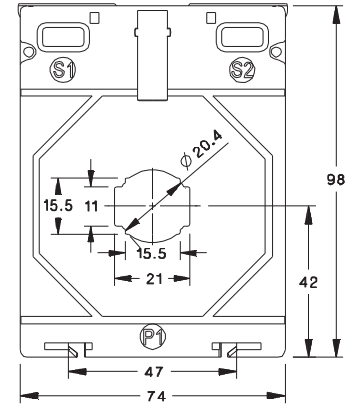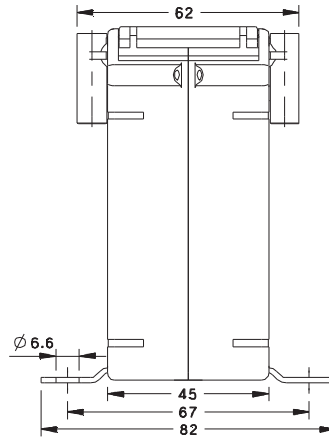

RISH XMER PROTECTION CLASS 74/40 (45)

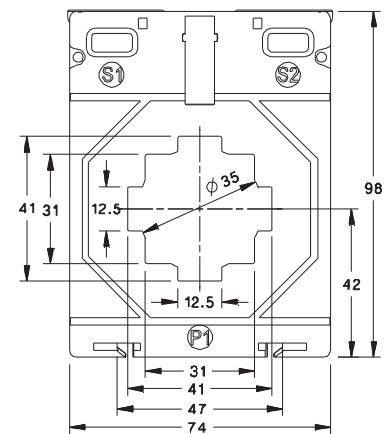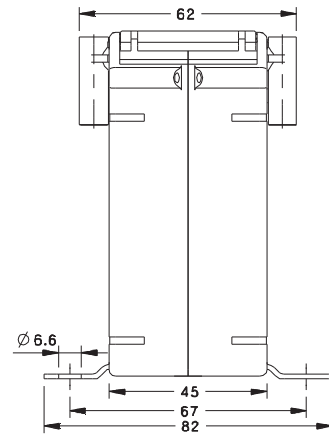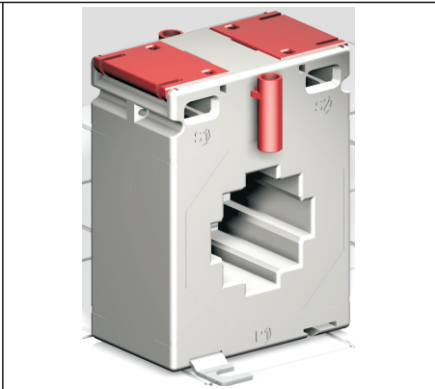

ALL DIMENSIONS ARE IN MM

Primary Current	RISH XMER 74/20 (45)	
	Accuracy	
	5P5	10P5
200A	2.5VA	2.5VA
250A	2.5VA	2.5VA
300A	2.5VA	2.5VA
400A	2.5VA	2.5VA


Primary Current	RISH XMER 74/40 (45)	
	Accuracy	
	5P5	10P5
120A	1VA	1VA
125A	1VA	1VA
150A	1VA	1.5VA
200A	1.5VA	1.5VA
250A	1.5VA	2.5VA
300A	2.5VA	2.5VA
400A	2.5VA	2.5VA
500A	1.5VA	1.5VA
600A	1.5VA	1.5VA
750A	1.5VA	2.5VA




LOW VOLTAGE CURRENT TRANSFORMER

RISH XMER PROTECTION CLASS 86 SERIES

RISH XMER PROTECTION CLASS 86/40

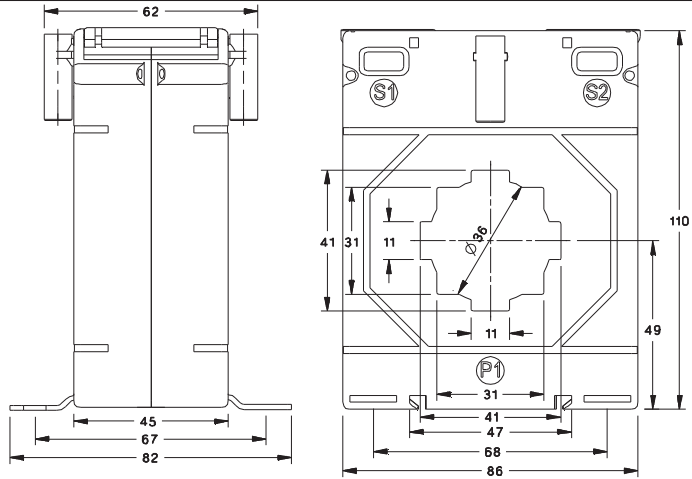

RISH XMER PROTECTION CLASS 86/50

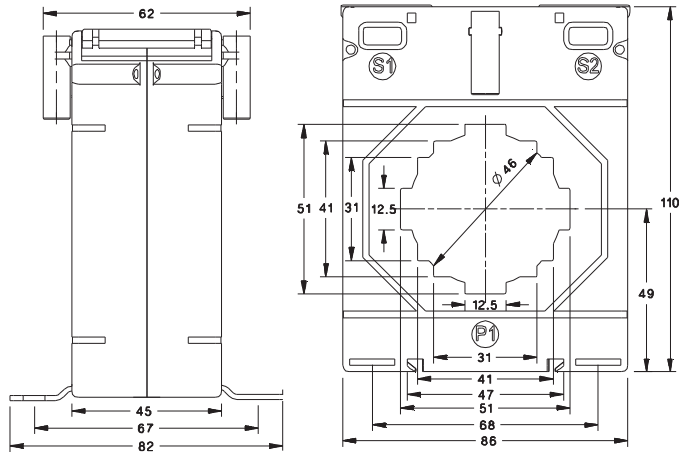

ALL DIMENSIONS ARE IN MM

Primary Current	RISH XMER 86/40 (45)			
	Accuracy			
	5P5	10P5	5P10	10P10
100A	1.5VA	1.5VA	-	-
120A	1.5VA	1.5VA	-	-
125A	1.5VA	2.5VA	-	-
150A	2.5VA	2.5VA	-	-
200A	3.75VA	3.75VA	1.5VA	1.5VA
250A	5VA	5VA	1.5VA	1.5VA
300A	5VA	5VA	1.5VA	1.5VA
400A	7.5VA	5VA	2.5VA	2.5VA
500A	7.5VA	7.5VA	2.5VA	2.5VA
600A	5VA	7.5VA	3.75VA	5VA
750A	10VA	10VA	5VA	5VA
800A	7.5VA	7.5VA	5VA	5VA
1000A	12.5VA	12.5VA	5VA	5VA



Primary Current	RISH XMER 86/50 (45)			
	Accuracy			
	5P5	10P5	5P10	10P10
100A	1.5VA	1.5VA	-	-
150A	2.5VA	2.5VA	-	-
200A	3.75VA	3.75VA	-	-
250A	3.75VA	3.75VA	-	-
300A	5VA	5VA	2.5VA	2.5VA
400A	5VA	5VA	1.5VA	1.5VA
500A	5VA	5VA	1.5VA	1.5VA
600A	5VA	5VA	1.5VA	1.5VA
750A	7.5VA	7.5VA	2.5VA	2.5VA
800A	7.5VA	7.5VA	2.5VA	2.5VA
1000A	10VA	10VA	2.5VA	2.5VA





LOW VOLTAGE CURRENT TRANSFORMER

RISH XMER PROTECTION CLASS 104 SERIES


RISH XMER PROTECTION CLASS 104/30 (45)

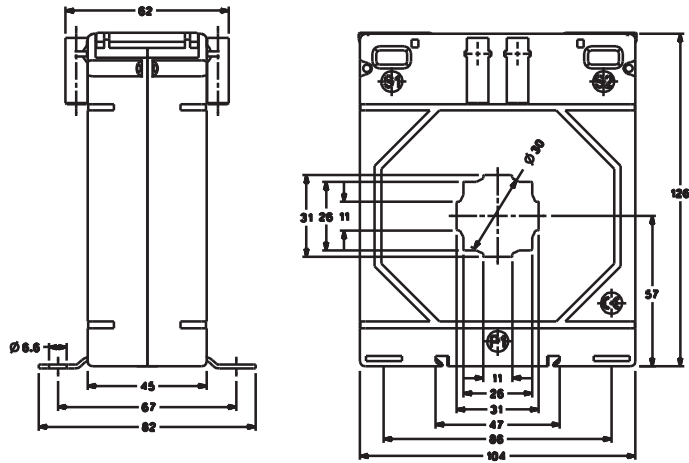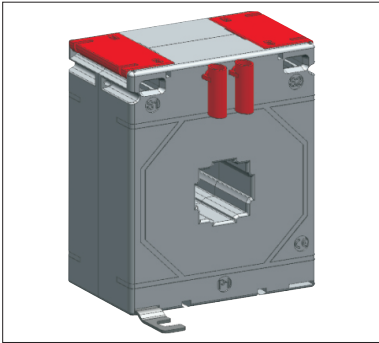

RISH XMER PROTECTION CLASS 104/50 (45)

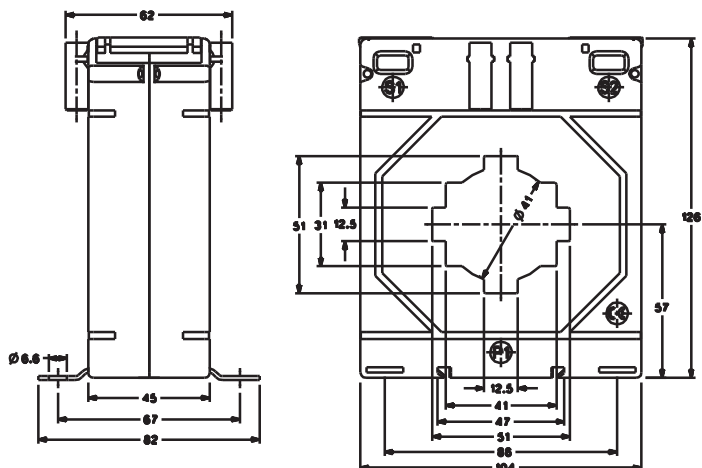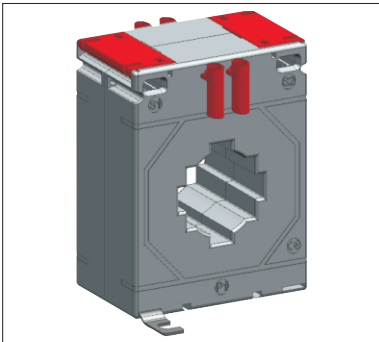

RISH XMER PROTECTION CLASS 104/60 (45)

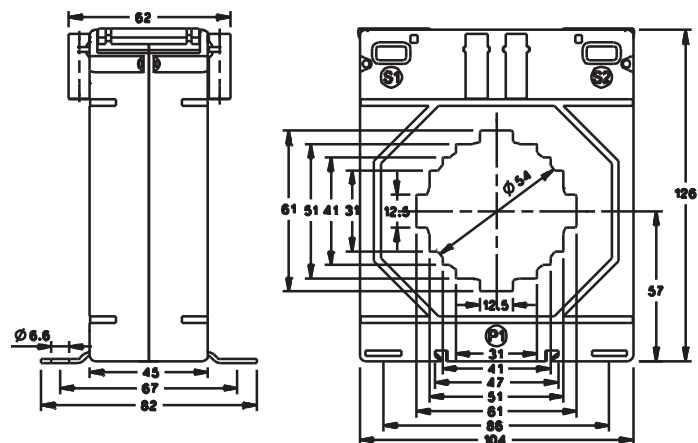

ALL DIMENSIONS ARE IN MM



LOW VOLTAGE CURRENT TRANSFORMER

Primary Current	RISH XMER 104/30 (45)			
	Accuracy			
	5P5	10P5	5P10	10P10
50A	2.5VA	2.5VA	-	-
60A	2.5VA	2.5VA	-	1.5VA
75A	2.5VA	2.5VA	-	1.5VA
80A	2.5VA	2.5VA	1.5VA	1.5VA
100A	5VA	5VA	1.5VA	2.5VA
125A	5VA	5VA	1.5VA	2.5VA
150A	7.5VA	7.5VA	2.5VA	2.5VA
200A	10VA	10VA	3.75VA	3.75VA
250A	10VA	10VA	5VA	5VA
300A	10VA	10VA	5VA	5VA
400A	15VA	15VA	5VA	5VA
500A	15VA	15VA	7.5VA	7.5VA
600A	15VA	15VA	7.5VA	10VA

Primary Current	RISH XMER 104/50 (45)			
	Accuracy			
	5P5	10P5	5P10	10P10
150A	2.5VA	2.5VA	-	-
200A	5VA	5VA	1.5VA	1.5VA
250A	5VA	7.5VA	2.5VA	2.5VA
300A	7.5VA	7.5VA	2.5VA	2.5VA
400A	7.5VA	7.5VA	2.5VA	2.5VA
500A	10VA	10VA	2.5VA	2.5VA
600A	10VA	10VA	2.5VA	2.5VA
750A	10VA	10VA	5VA	5VA
800A	10VA	10VA	5VA	5VA
1000A	10VA	10VA	5VA	5VA



Primary Current	RISH XMER 104/60 (45)			
	Accuracy			
	5P5	10P5	5P10	10P10
100A	2.5VA	2.5VA	-	-
150A	3.75VA	3.75VA	1VA	1VA
200A	5VA	5VA	1.5VA	1.5VA
250A	5VA	7.5VA	2.5VA	2.5VA
300A	7.5VA	7.5VA	2.5VA	2.5VA
400A	7.5VA	7.5VA	2.5VA	2.5VA
500A	7.5VA	7.5VA	2.5VA	2.5VA
600A	10VA	10VA	3.75VA	3.75VA
750A	10VA	10VA	3.75VA	3.75VA
800A	10VA	10VA	3.75VA	3.75VA
1000A	12.5VA	12.5VA	3.75VA	3.75VA
1200A	15VA	15VA	5VA	5VA
1250A	15VA	15VA	5VA	5VA





LOW VOLTAGE CURRENT TRANSFORMER

RISH XMER PROTECTION CLASS 140 SERIES



RISH XMER PROTECTION CLASS 140/60 (45)

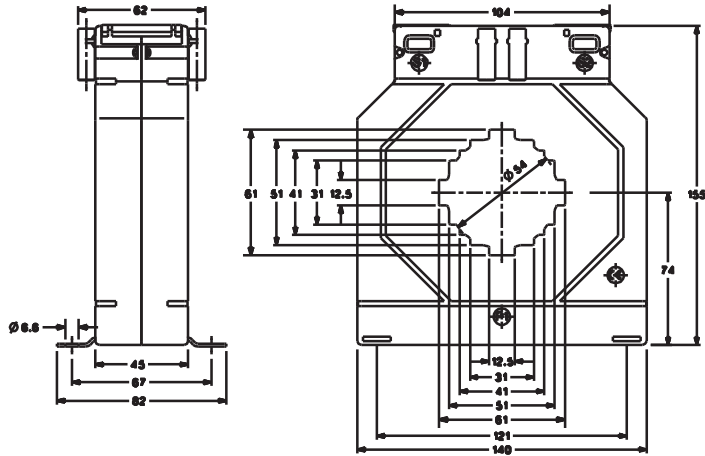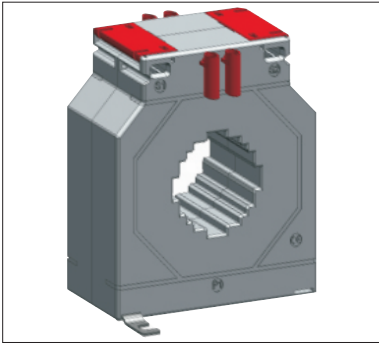

RISH XMER PROTECTION CLASS 140/80 (45)

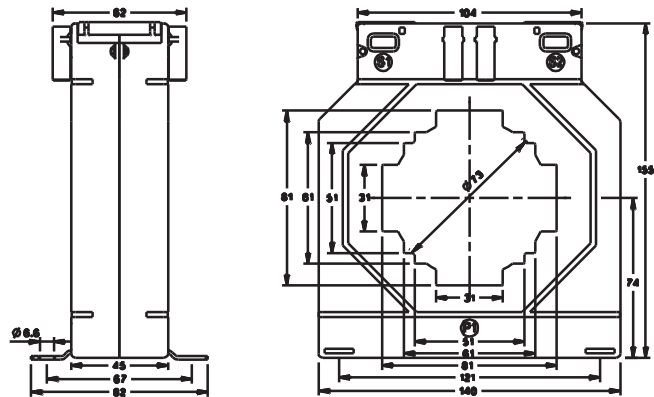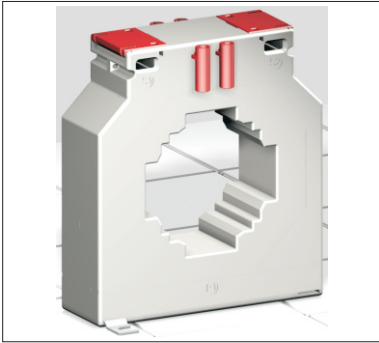

RISH XMER PROTECTION CLASS 140/100 (45)

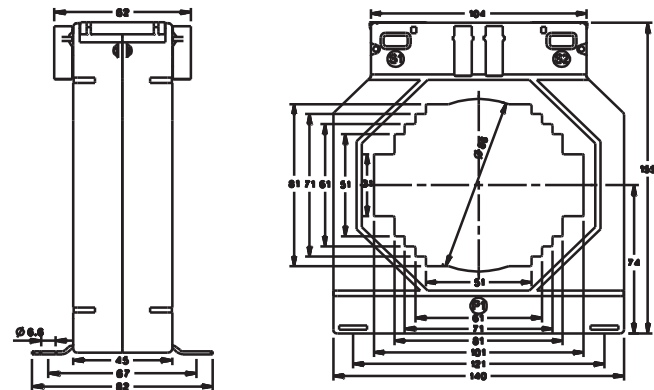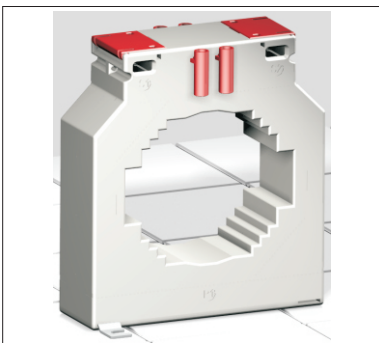

ALL DIMENSIONS ARE IN MM



LOW VOLTAGE CURRENT TRANSFORMER

Primary Current	RISH XMER 140/60 (45)			
	Accuracy			
	5P5	10P5	5P10	10P10
200A	7.5VA	7.5VA	2.5VA	2.5VA
250A	7.5VA	7.5VA	2.5VA	2.5VA
300A	10VA	10VA	3.75VA	3.75VA
400A	10VA	10VA	5VA	5VA
500A	10VA	10VA	5VA	5VA
600A	12.5VA	12.5VA	5VA	5VA
750A	12.5VA	12.5VA	5VA	5VA
800A	12.5VA	12.5VA	5VA	5VA
1000A	12.5VA	12.5VA	7.5VA	7.5VA
1200A	12.5VA	12.5VA	7.5VA	7.5VA
1250A	12.5VA	12.5VA	7.5VA	7.5VA
1500A	15VA	15VA	10VA	10VA
1600A	15VA	15VA	10VA	10VA
2000A	20VA	20VA	12.5VA	12.5VA

Primary Current	RISH XMER 140/80 (45)			
	Accuracy			
	5P5	10P5	5P10	10P10
200A	5VA	5VA	2.5VA	2.5VA
250A	5VA	5VA	2.5VA	2.5VA
300A	7.5VA	7.5VA	3.75VA	3.75VA
400A	10VA	10VA	5VA	5VA
500A	10VA	10VA	5VA	5VA
600A	10VA	10VA	5VA	5VA
750A	10VA	10VA	5VA	5VA
800A	10VA	10VA	5VA	5VA
1000A	10VA	10VA	5VA	5VA
1200A	10VA	10VA	5VA	5VA
1250A	10VA	10VA	5VA	5VA
1500A	15VA	15VA	7.5VA	7.5VA
1600A	15VA	15VA	7.5VA	7.5VA
2000A	20VA	20VA	10VA	10VA
2500A	20VA	20VA	10VA	10VA



Primary Current	RISH XMER 140/100 (45)			
	Accuracy			
	5P5	10P5	5P10	10P10
250A	2.5VA	2.5VA	-	-
300A	3.75VA	3.75VA	1VA	1VA
400A	5VA	5VA	1.5VA	1.5VA
500A	5VA	5VA	1.5VA	1.5VA
600A	5VA	5VA	1.5VA	1.5VA
750A	7.5VA	7.5VA	2.5VA	2.5VA
800A	10VA	10VA	2.5VA	2.5VA
1000A	10VA	10VA	2.5VA	2.5VA
1200A	10VA	10VA	2.5VA	2.5VA
1250A	10VA	10VA	2.5VA	2.5VA
1500A	10VA	10VA	2.5VA	2.5VA
1600A	10VA	10VA	2.5VA	2.5VA
2000A	10VA	10VA	2.5VA	2.5VA
2500A	10VA	10VA	2.5VA	2.5VA
3000A	10VA	10VA	2.5VA	2.5VA





LOW VOLTAGE CURRENT TRANSFORMER

RISH XMER PROTECTION CLASS 225 SERIES



RISH XMER PROTECTION CLASS 255/60 (50)

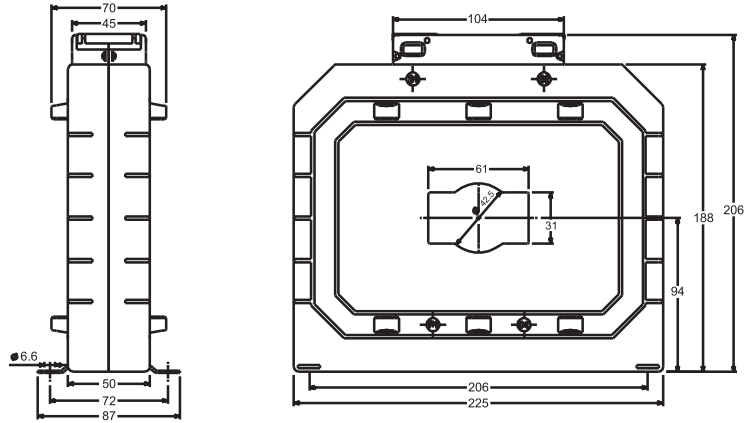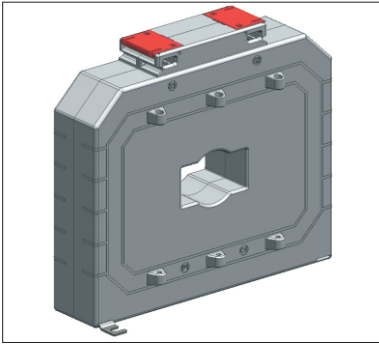

RISH XMER PROTECTION CLASS 225/125 (50)

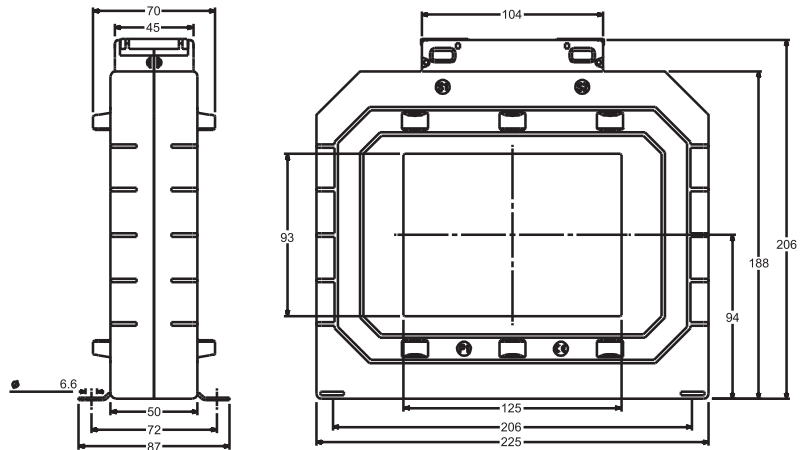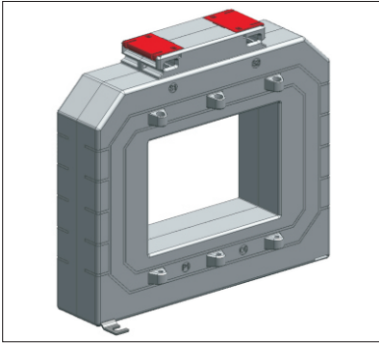

RISH XMER PROTECTION CLASS 225/167 (50)

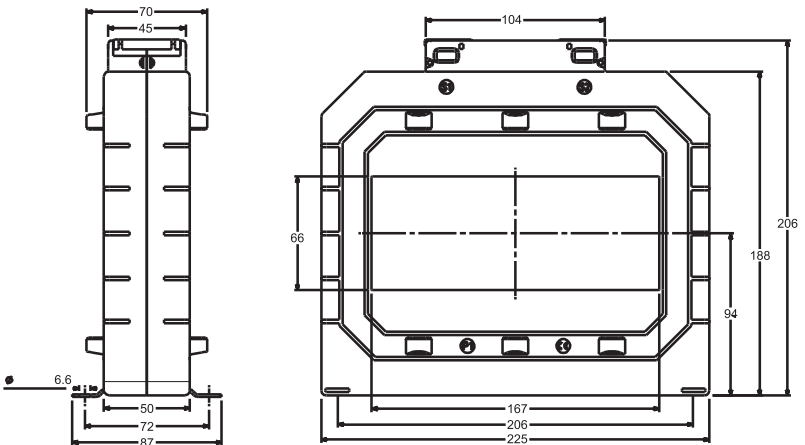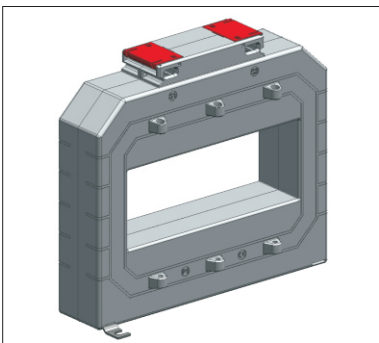

ALL DIMENSIONS ARE IN MM

















LOW VOLTAGE CURRENT TRANSFORMER

Primary Current	RISH XMER 225/60 (50)			
	Accuracy			
	5P5	10P5	5P10	10P10
100A	10VA	15VA	-	-
150A	15VA	15VA	5VA	-
200A	15VA	15VA	7.5VA	10VA
250A	15VA	15VA	10VA	15VA
300A	15VA	15VA	10VA	15VA
400A	15VA	15VA	15VA	15VA
500A	15VA	15VA	15VA	15VA
600A	15VA	15VA	15VA	15VA
750A	15VA	15VA	15VA	15VA
800A	15VA	15VA	15VA	15VA
1000A	15VA	15VA	15VA	15VA
1200A	15VA	15VA	15VA	15VA
1250A	15VA	15VA	15VA	15VA
1500A	15VA	15VA	15VA	15VA
2000A	15VA	15VA	15VA	15VA

Primary Current	RISH XMER 225/125 (50)			
	Accuracy			
	5P5	10P5	5P10	10P10
600A	5VA	5VA	-	-
750A	5VA	10VA	-	-
1000A	10VA	10VA	-	-
1200A	10VA	15VA	1.5VA	2.5VA
1250A	10VA	15VA	1.5VA	2.5VA
1500A	15VA	15VA	2.5VA	2.5VA
1600A	15VA	15VA	2.5VA	2.5VA
2000A	15VA	15VA	3.75VA	5VA
2500A	15VA	15VA	5VA	7.5VA
3000A	15VA	20VA	5VA	7.5VA
4000A	15VA	20VA	5VA	7.5VA
5000A	20VA	20VA	5VA	10VA

Primary Current	RISH XMER 225/167 (50)			
	Accuracy			
	5P5	10P5	5P10	10P10
1000A	5VA	5VA	-	-
1200A	5VA	7.5VA	1.5VA	2.5VA
1250A	5VA	7.5VA	1.5VA	2.5VA
1500A	5VA	7.5VA	2.5VA	3.75VA
1600A	5VA	7.5VA	2.5VA	3.75VA
2000A	7.5VA	12.5VA	3.75VA	5VA
2500A	10VA	15VA	3.75VA	7.5VA
3000A	15VA	20VA	7.5VA	10VA
4000A	20VA	20VA	7.5VA	12.5VA
5000A	20VA	20VA	7.5VA	12.5VA
6000A	20VA	20VA	7.5VA	12.5VA



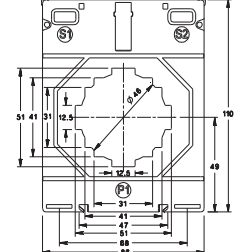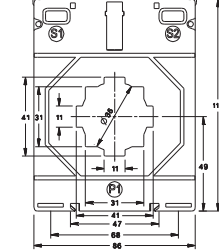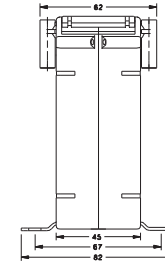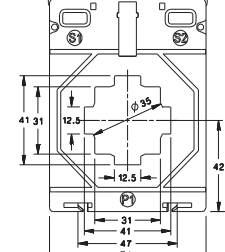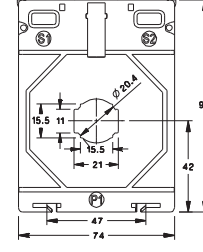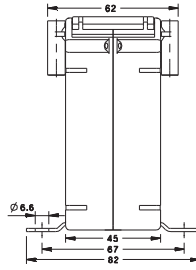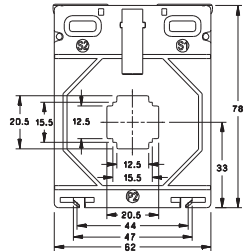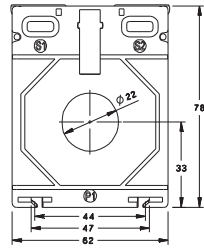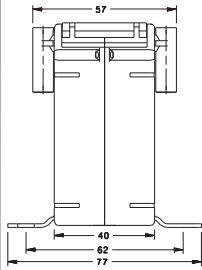

RISH XMER 62/R















RISH XMER 62/20(40)

RISH XMER 74/20(45)

RISH XMER 74/40(45)

RISH XMER 86/40(45)

RISH XMER 86/50(45)



RISH XMER 104/30(45)

RISH XMER 104/50(45)

RISH XMER 104/60(45)

RISH XMER 140/60(45)

RISH XMER 140/80(45)






RISH XMER 140/100(45)

RISH XMER PROTECTION SERIES CURRENT TRANSFORMER RANGES




Primary Current	RISH XMER 62/R		RISH XMER 62/20 (40)		RISH XMER 74/20 (45)		RISH XMER 74/40 (45)		RISH XMER 86/40 (45)				RISH XMER 86/50 (45)			
	Accuracy		Accuracy		Accuracy		Accuracy		Accuracy				Accuracy			
	5P5	10P5	5P5	10P5	5P5	10P5	5P5	10P5	5P5	10P5	5P10	10P10	5P5	10P5	5P10	10P10
100A	-	1.0VA	-	1.0VA	-	-	-	-	1.5VA	1.5VA	-	-	1.5VA	1.5VA	-	-
120A					-	-	1VA	1VA	1.5VA	1.5VA	-	-	-	-	-	-
125A	1.0VA	1.0VA	1.0VA	1.0VA	-	-	1VA	1VA	1.5VA	2.5VA	-	-	-	-	-	-
150A	1.0VA	1.0VA	1.0VA	1.0VA	-	-	1VA	1.5VA	2.5VA	2.5VA	-	-	2.5VA	2.5VA	-	-
200A	1.0VA	1.0VA	1.0VA	1.0VA	2.5VA	2.5VA	1.5VA	1.5VA	3.75VA	3.75VA	1.5VA	1.5VA	3.75VA	3.75VA	-	-
250A	1.0VA	1.0VA	-	-	2.5VA	2.5VA	1.5VA	2.5VA	5VA	5VA	1.5VA	1.5VA	3.75VA	3.75VA	-	-
300A	1.0VA	1.5VA	-	-	2.5VA	2.5VA	2.5VA	2.5VA	5VA	5VA	1.5VA	1.5VA	5VA	5VA	2.5VA	2.5VA
400A	-	-	-	-	2.5VA	2.5VA	2.5VA	2.5VA	7.5VA	5VA	2.5VA	2.5VA	5VA	5VA	1.5VA	1.5VA
500A	-	-	-	-	-	-	1.5VA	1.5VA	7.5VA	7.5VA	2.5VA	2.5VA	5VA	5VA	1.5VA	1.5VA
600A	-	-	-	-	-	-	1.5VA	1.5VA	5VA	7.5VA	3.75VA	5VA	5VA	5VA	1.5VA	1.5VA
750A	-	-	-	-	-	-	1.5VA	2.5VA	10VA	10VA	5VA	5VA	7.5VA	7.5VA	2.5VA	2.5VA
800A	-	-	-	-	-	-	-	-	7.5VA	7.5VA	5VA	5VA	7.5VA	7.5VA	2.5VA	2.5VA
1000A	-	-	-	-	-	-	-	-	12.5VA	12.5VA	5VA	5VA	10VA	10VA	2.5VA	2.5VA


Primary Current	RISH XMER 104/30 (45)				RISH XMER 104/50 (45)				RISH XMER 104/60 (45)				RISH XMER 140/60 (45)				RISH XMER 140/80 (45)				RISH XMER 140/100 (45)			
	Accuracy				Accuracy				Accuracy				Accuracy				Accuracy				Accuracy			
	5P5	10P5	5P10	10P10	5P5	10P5	5P10	10P10	5P5	10P5	5P10	10P10	5P5	10P5	5P10	10P10	5P5	10P5	5P10	10P10	5P5	10P5	5P10	10P10
50A	2.5VA	2.5VA	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
60A	2.5VA	2.5VA	-	1.5VA	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
75A	2.5VA	2.5VA	-	1.5VA	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
80A	2.5VA	2.5VA	1.5VA	1.5VA	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100A	5VA	5VA	1.5VA	2.5VA	-	-	-	-	2.5VA	2.5VA	-	-	-	-	-	-	-	-	-	-	-	-	-	-
125A	5VA	5VA	1.5VA	2.5VA	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
150A	7.5VA	7.5VA	2.5VA	2.5VA	2.5VA	2.5VA	-	-	3.75VA	3.75VA	1VA	1VA	-	-	-	-	-	-	-	-	-	-	-	-
200A	10VA	10VA	3.75VA	3.75VA	5VA	5VA	1.5VA	1.5VA	5VA	5VA	1.5VA	1.5VA	7.5VA	7.5VA	2.5VA	2.5VA	5VA	5VA	2.5VA	2.5VA	-	-	-	-
250A	10VA	10VA	5VA	5VA	5VA	7.5VA	2.5VA	2.5VA	5VA	7.5VA	2.5VA	2.5VA	7.5VA	7.5VA	2.5VA	2.5VA	5VA	5VA	2.5VA	2.5VA	2.5VA	2.5VA	-	-
300A	10VA	10VA	5VA	5VA	7.5VA	7.5VA	2.5VA	2.5VA	7.5VA	7.5VA	2.5VA	2.5VA	10VA	10VA	3.75VA	3.75VA	7.5VA	7.5VA	3.75VA	3.75VA	3.75VA	3.75VA	1VA	1VA
400A	15VA	15VA	5VA	5VA	7.5VA	7.5VA	2.5VA	2.5VA	7.5VA	7.5VA	2.5VA	2.5VA	10VA	10VA	5VA	5VA	10VA	10VA	5VA	5VA	5VA	5VA	1.5VA	1.5VA
500A	15VA	15VA	7.5VA	7.5VA	10VA	10VA	2.5VA	2.5VA	7.5VA	7.5VA	2.5VA	2.5VA	10VA	10VA	5VA	5VA	10VA	10VA	5VA	5VA	5VA	5VA	1.5VA	1.5VA
600A	15VA	15VA	7.5VA	10VA	10VA	10VA	2.5VA	2.5VA	10VA	10VA	3.75VA	3.75VA	12.5VA	12.5VA	5VA	5VA	10VA	10VA	5VA	5VA	5VA	5VA	1.5VA	1.5VA
750A	-	-	-	-	10VA	10VA	5VA	5VA	10VA	10VA	3.75VA	3.75VA	12.5VA	12.5VA	5VA	5VA	10VA	10VA	5VA	5VA	7.5VA	7.5VA	2.5VA	2.5VA
800A	-	-	-	-	10VA	10VA	5VA	5VA	10VA	10VA	3.75VA	3.75VA	12.5VA	12.5VA	5VA	5VA	10VA	10VA	5VA	5VA	10VA	10VA	2.5VA	2.5VA
1000A	-	-	-	-	10VA	10VA	5VA	5VA	12.5VA	12.5VA	3.75VA	3.75VA	12.5VA	12.5VA	7.5VA	7.5VA	10VA	10VA	5VA	5VA	10VA	10VA	2.5VA	2.5VA
1200A	-	-	-	-	-	-	-	-	15VA	15VA	5VA	5VA	12.5VA	12.5VA	7.5VA	7.5VA	10VA	10VA	5VA	5VA	10VA	10VA	2.5VA	2.5VA
1250A	-	-	-	-	-	-	-	-	15VA	15VA	5VA	5VA	12.5VA	12.5VA	7.5VA	7.5VA	10VA	10VA	5VA	5VA	10VA	10VA	2.5VA	2.5VA
1500A	-	-	-	-	-	-	-	-	-	-	-	-	15VA	15VA	10VA	10VA	15VA	15VA	7.5VA	7.5VA	10VA	10VA	2.5VA	2.5VA
1600A	-	-	-	-	-	-	-	-	-	-	-	-	15VA	15VA	10VA	10VA	15VA	15VA	7.5VA	7.5VA	10VA	10VA	2.5VA	2.5VA
2000A	-	-	-	-	-	-	-	-	-	-	-	-	20VA	20VA	12.5VA	12.5VA	20VA	20VA	10VA	10VA	10VA	10VA	2.5VA	2.5VA
2500A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	20VA	20VA	10VA	10VA	10VA	10VA	2.5VA	2.5VA
3000A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	10VA	10VA	2.5VA	2.5VA

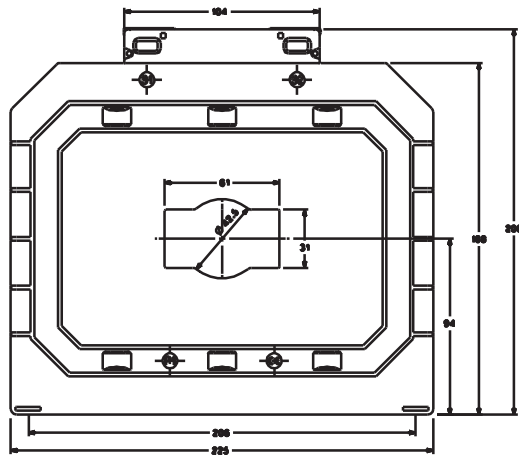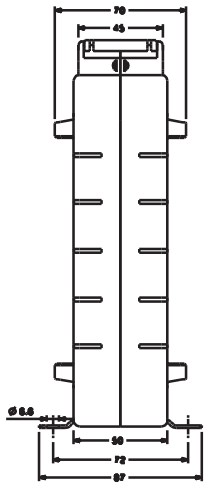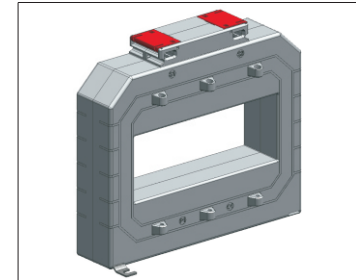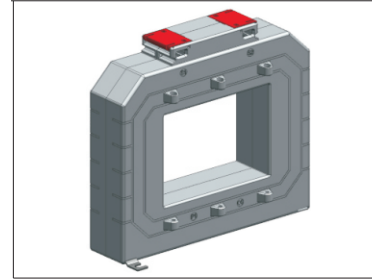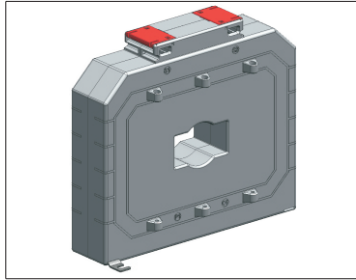

RISH XMER 225/60 (50)

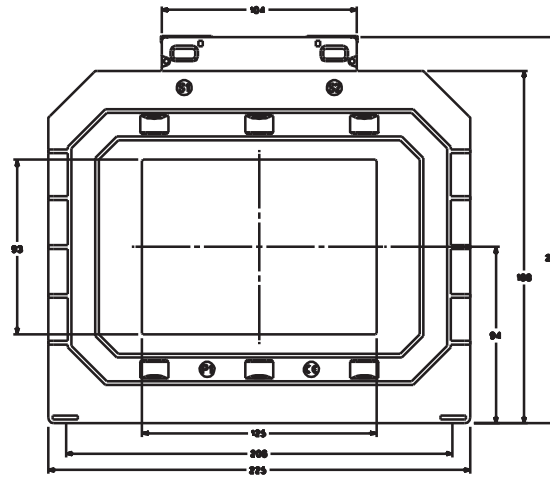

RISH XMER 225/125 (50)

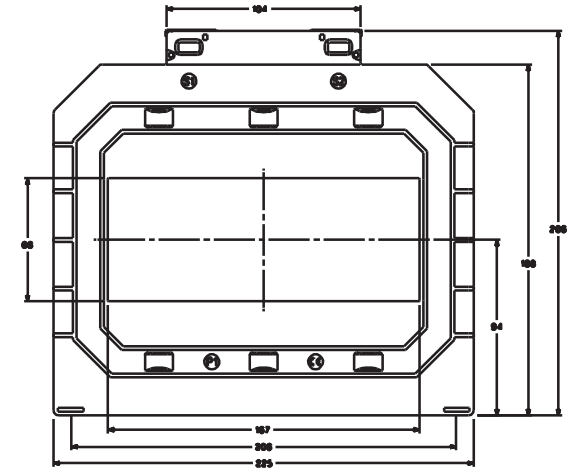

RISH XMER 225/167 (50)

Primary Current	RISH XMER 225/60 (50)				RISH XMER 225/125 (50)				RISH XMER 225/167 (50)			
	Accuracy				Accuracy				Accuracy			
	5P5	10P5	5P10	10P10	5P5	10P5	5P10	10P10	5P5	10P5	5P10	10P10
100A	10VA	15VA	-	-	-	-	-	-	-	-	-	-
150A	15VA	15VA	5VA	-	-	-	-	-	-	-	-	-
200A	15VA	15VA	7.5VA	10VA	-	-	-	-	-	-	-	-
250A	15VA	15VA	10VA	15VA	-	-	-	-	-	-	-	-
300A	15VA	15VA	10VA	15VA	-	-	-	-	-	-	-	-
400A	15VA	15VA	15VA	15VA	-	-	-	-	-	-	-	-
500A	15VA	15VA	15VA	15VA	-	-	-	-	-	-	-	-
600A	15VA	15VA	15VA	15VA	5VA	5VA	-	-	-	-	-	-
750A	15VA	15VA	15VA	15VA	5VA	10VA	-	-	-	-	-	-
800A	15VA	15VA	15VA	15VA	-	-	-	-	-	-	-	-
1000A	15VA	15VA	15VA	15VA	10VA	10VA	-	-	5VA	5VA	-	-
1200A	15VA	15VA	15VA	15VA	10VA	15VA	1.5VA	2.5VA	5VA	7.5VA	1.5VA	2.5VA
1250A	15VA	15VA	15VA	15VA	10VA	15VA	1.5VA	2.5VA	5VA	7.5VA	1.5VA	2.5VA
1500A	15VA	15VA	15VA	15VA	15VA	15VA	2.5VA	2.5VA	5VA	7.5VA	2.5VA	3.75VA
1600A					15VA	15VA	2.5VA	2.5VA	5VA	7.5VA	2.5VA	3.75VA
2000A	15VA	15VA	15VA	15VA	15VA	15VA	3.75VA	5VA	7.5VA	12.5VA	3.75VA	5VA
2500A	-	-	-	-	15VA	15VA	5VA	7.5VA	10VA	15VA	3.75VA	7.5VA
3000A	-	-	-	-	15VA	20VA	5VA	7.5VA	15VA	20VA	7.5VA	10VA
4000A	-	-	-	-	15VA	20VA	5VA	7.5VA	20VA	20VA	7.5VA	12.5VA
5000A	-	-	-	-	20VA	20VA	5VA	10VA	20VA	20VA	7.5VA	12.5VA
6000A	-	-	-	-	-	-	-	-	20VA	20VA	7.5VA	12.5VA