

Condition Monitoring Catalogue



Vibration Sensor

Vibration Transmitter

Vibration Switch

Vibration Meter

Vibration Monitoring System

Accurate | Dependable | Affordable



Vibration Sensors

Vibrasens

With Vibrasens, Masibus is committed to supply the highest quality line of various kinds of Vibration sensors in the world at the best prices

Vibrasens Product Range

Vibrasens offers a comprehensive selection of @ICP industrial piezoelectric accelerometers and vibration sensors in a variety of industrial packages



10 Year
MTBF

Speciality

- Accelerometer, Velocity sensor, 4-20mA sensor
- General purpose, premium
- General purpose, economy
- Low frequency
- Multi output with Temperature
- 4-20mA Loop Power sensor
- High temperature
- High frequency

VibraSens Key Differentiator Features

- 10 Year MTBF
- IP68 protection
- Dual Case isolation
- Annual Shear design
- ICP transmission mode
- EMC emission (EN 50081-1, EN 50081-2)
- EMC immunity (EN 50082-1, EN 50082-2)
- Material - AISI 316L, DIN 1.4404 (Stainless steel)
- Compliance with API670
- Intrinsically safe (Atex and IECEx certification)

Accelerometer



Features :

- 10, 100, 500 mV/g version available
- 55 °C to 120 °C (-67 F to 248 °F)
- @ICP transmission mode
- Annular shear mode
- Dual case isolation with Faraday shield
- IP67 with associated cable
- Complies with API 670 requirements (A=6 only)

Benefits :

- Continuous Machine Health Monitoring
- Easy to connect and install
- Safety for operator for taking reading
- Reliable reading of inaccessible areas
- Annular shear mode is less susceptible to transverse vibrations and better immune to electronic saturation at high frequency
- Exceptional bias voltage stability at elevated temperatures.

4-20mA Loop Powered Sensor



4-20 mA loop powered industrial accelerometer uses the industry standard 4-20mA Loop that interfaces directly with PLC, DCS and 4-20mA monitor

- Economy model
- Reverse wiring and ESD protection
- Output 4-20 mA in Loop
- Transverse response sensitivity (20 Hz, 5g) < 5%
- Voltage source: 10 to 30 VDC

Benefits :

- Large choice of output (velocity, acceleration, RMS, equivalent Peak) and frequency range helps to fit almost every customer requirements
- Continuous Machine Health Monitoring
- Easy to connect and install
- Safety for operator to take reading
- Reliable reading of inaccessible areas

Proximity Sensor (MDS10/MDT10), Technicad



The non-contacting displacement probe transducer systems are gap to voltage devices that measure static as well as dynamic distances between the probe tip and the observed target.

Features :

- Nominal measuring range : 2mm, 2.5mm, 3.0mm, 3.5mm, 4.0mm
- Frequency response : 0 to 10 KHz
- Nominal output voltage range : -4V to -20V
- Housing material : Probe-robust stainless steel
Transducer- aluminum alloy
- The probe tip is constructed of polyphenylene sulfide, a high performance plastic, impervious to oil, water and many different chemical liquids.
- The most common use is for shaft position and relative vibration measurement on rotating machinery.
- The transducer detects in the return signal the strength loss for the eddy-currents generated in the observed surface and conditions the signal for linear voltage output.
- The probe-transducer system indicates the dynamic motion of the shaft relative to the bearing.

Accessories



Sensor Cable

Features :

- Vibration Sensor Cable assembly suitable connector
- Protection Class IP67
- Temperature Range -25 °C to +90 °C
- M12 Over Molded
- SS Armor available
- Teflon cable available

Benefits :

- Low noise
- Twisted Shielded to protect against EM
- Molded cable for better connections
- Bakelite connector for harsh environment
- SS Armor for better protection

Mounting Pad



Features :

- Made of SS
- M6 Threading
- Suitable for Vibration sensor mounting

Benefits :

- Easy mounting of Vibration Sensor
- Provide good surface finish required for mounting of vibration sensor
- Proper threading for better mounting of sensor.

Online Vibration Monitoring Products

Vibration Transmitter (VT7S10)



Vibration Transmitter VT7S10 is a strategic tool for predictive maintenance. It provides on-line vibration monitoring and provides easy communication to data acquisition system where vibration can be displayed, trended and alarm can be generated

Features :

- Velocity range: 0-12.5, 0-25, 0-50 mm/s ((factory selectable)
- Vibration is measured in terms of R.M.S and peak to peak
- Measurement of overall vibration in rotating machines.
- Range can be re-calibrated

Benefits :

- Loop powered
- Easy to connect and install
- Buffer output for analysis
- Re-calibration
- Higher Temp for sensor

Dual Channel Vibration Transmitter (VT7S12) / Alarm unit



Micro-controller based Dual Channel Vibration Transmitter VT7S12 with Dual Retransmission Output is a low cost high performance two channel vibration alarm monitor in a modular format ideally suited for protection of rotating machinery against costly breakdown, including motors, fans, pumps etc.

Features :

- Small Compact size DIN rail mounted
- Dynamic buffered signal output for analysis
- Operating Supply : 18-30 VDC/Optional 230 VAC
- Output - 2 x 4-20 mA proportional to vibration level (1 per channel)
- Input Type : Accelerometer

Benefits :

- Acceleration, Velocity or Displacement can be selected
- Range is field programmable
- Scrolling display
- Front key configuration
- Different set points
- Time delay for relays

Vibration Switch (VSW-150)



Vibration Switch is a strategic tool for protection of rotating machines. It measures online vibration and provides relay output for operator alarm or machine trip purpose. Once the alarm is generated, machine data can be analyzed for the root cause of increased vibration. Vibration Switch makes on-line monitoring cost-effective.

Features :

- Three in One (Transmitter, Indicator and Switch)
- Remote sensor mounting
- Relay output with Status Indicator.
- Power Indication
- Vibration Range available up to 50 mm/s

Vibration Switch (VSW-150) cont...

- Set Value Switch
- Precise isolated analog output
- Wide Supply Voltage Range
- Bright 3½ LED display
- Excellent long term Stability
- Easy configuration from front keys

Benefits :

- Remote mounting provides longer life
- Local digital indication for vibration measurement
- Good replacement of Mechanical type Vibration switches
- Protects machines from break down
- Essential for safety of man and machines

Vibration Monitor - 4 channel (VMS-4S)



VMS-4S vibration monitor accepts the vibration signal from an accelerometer and converts it to a 4-20mA output. It also provides buffered output of the raw signal from the accelerometer for vibration analysis. This option allows the analyst to perform diagnostic analysis on the machine fault as well as providing the continuous, overall monitoring and periodic diagnostic monitoring. The output 4-20 mA can be interfaced with PLC or DCS system, which in turn can continuously monitor the condition of machine.

Features :

- Online Vibration monitoring
- Microcontroller based
- Capable to take process inputs also on 4-20mA like temperature
- 230V AC power supply
- 4 channels monitoring
- RS-485 Output for communication
- Parameter: Displacement, Velocity, Acceleration
- Buffer Output

Benefits :

- Acceleration, Velocity or Displacement can be selected.
- Fully configurable & programmable by front keypad.
- Scrolling display
- Different set points
- Relay output for danger and alarms for protection of machine
- Time delay for relays
- Low cost of cabling due to Modbus

RPM Monitor (409-S)



409-S Monitor is versatile microcontroller based RPM indicator. 409-S is designed for speed measurement of industrial equipment using proximity sensor. It provides non-contact measurement of rotor speed. Retransmission analog output which can be connected to plant RTU/PLC/DCS Systems

Features :

- Various RPM range available
- Relay & analog output
- Set Value Switch
- LED display and Easy configuration from front keys
- Excellent long term Stability

Benefits :

- Cost-effective online vibration monitoring
- Remote mounting provides longer life
- Measures online RPM and provides relay output for operator alarm or machine trip purpose

Portable Tools for Analysis

Vibration Meter (VM-908)



VM 908 Vibration meter is a portable device used for the measurement of the machine vibration. It measures the vibration to which it is exposed. It provides essential periodic monitoring of fan, pump, motor and other industrial machines.

Features :

- 3½ LCD digital Display
- Vibration meter provides off-line monitoring with various parameters like Displacement, Velocity and Acceleration.
- Battery: 9V6F22, 25 hours of continuous operation
- Vibration is measured in terms of R.M.S. and peak

Benefits :

- VM-908 is a very handy tool for the technician.
- VM-908 is a very compact device easily can be put in to your pocket

Vibration meter X-Viber, VMI-AB, Sweden



X-Viber is a low-cost route data collector. Data collection and trend analysis introduces a great many possibilities to save money.

Benefits :

- Selectable Measuring unit, Frequency range
- Options of Data Logging
- Single plane balancing with the 3-point/ Vector method
- Amplitude and phase measurements
- Higher availability, low power consumption, avoids catastrophic failure.

Features :

- Total Vibration level
- Envelope analysis
- Bearing Condition Value
- Speed Measurements
- FFT analysis
- Temperature measurements

Vibration Measurement instrument VIBER X5™ VMI - AB, Sweden

Features :

- Unbeatable price Vs performance ratio
- Coast-down/up, Orbit analysis, bearing conditions, Amplitude and Phase, Envelope Spectra
- Datalogger for long term recording
- Route based data collection
- No additional software upgrade cost, No annual service fee
- Roughed and tight (IP65)



Vibration Calibrator CA200 VMI-AB, Sweden



Features :

- Possible to test most accelerometers, velocity transducers and proximity probes
- Can be used mobile in a plant, with only line voltage.
- Vibrograph© software is virtual instrument, communication through USB. The amplifier is controlled by Vibrograph©.
- A calibration certificate with response plot can be generated automatically.
- Delivered in a bag, complete with vibrator, reference transducer, amplifier and software

Benefits :

- Increase reliability in measurements and analysis
- Routine calibration of sensors and associated instrumentation is recommended to improve confidence in measurement accuracy and acquired data

Portable Tools for Balancing

Vibrometer MC1100, Hofmann



Features :

- Portable and ready to operate
- Checking machine vibrations
- Evaluation of the condition of rolling bearings
- Checking rotational speed
- Machine rotating at low and high speed can be well assessed
- Measuring temperature (option)
- Check of belt tension (option)
- Identification of critical operational areas
- Early detection of failures

Mini Balancer MC2100, Hofmann



Features :

- Field balancing and checking vibrations with one instrument
- Single or dual plane field balancing
- Easy to understand and reliable user menu
- Portable and ready to operate
- Measuring and balancing protocol
- Measuring rotational speed
- Excellent cost/performance ratio
- Balancing in production and assembly under operational conditions

VibroLyzer VL 8000, Hofmann



Features :

- Vibration analysis, Machine Diagnostics, Field Balancing
- Very large colour LCD
- Analyzing frequencies of a vibration (FFT)
- Evaluating resonance frequencies and transfer functions
- Observing and recording vibration data
- Detecting machine damage
- Tracking analysis, Order analysis
- Balancing in one or two planes
- PC Software


Online Vibration Monitoring Systems (VMS)

Periodic monitoring provides a good solution for Balance of Plant machinery. This is because of the large number of points to be monitored each month. Too many to have continuous monitoring on all of them! Still, online vibration monitoring is required for some of measurement points because of following reasons and benefits

- Machines with higher than normal maintenance (Faster deterioration of machine health)
- Better operating condition visibility
- Personnel safety (must climb to reach measurement points)
- Hard to get to machines (like cooling towers)
- Increased workloads for personnel

Masibus offers following VMS models for various applications.


Cooling Tower Fan Monitoring

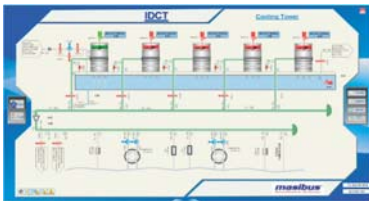

- Access to gear box is difficult in cooling tower fan
- Sensor to be mounted on bearing support part on motor and gear
- Bearing condition, casing vibration and fan vibration can be measured online

- Detection of potential problems like fan imbalance/ broken fan blade can be detected at early stages
- Low cost to justify installation


ID/FD Fan Monitoring

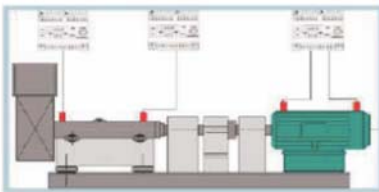

- Elements like Seal failure, bearing failure, poor lubrication, coupling problem misalignment and fan/blower imbalance can be monitored using a online Vibration Monitoring system

- Frequency of failures will reduce by online Vibration Monitoring
- Alarm level can be set as per the criticality
- Measurements can be acceleration or velocity

Crusher Monitoring

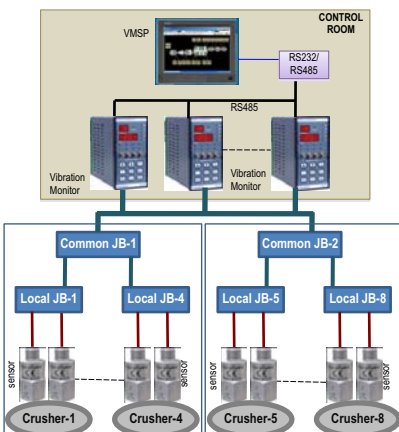

The monitoring system of the crusher provides automatic and continuous monitoring of the vibration that emanate from the crusher during every idle state or running state of operation of the crusher.

Features :

- Monitors healthiness of the Rotational Machinery
- Acknowledge abnormalities
- Safe guard Machine
- Database for Analysis

Machine Protection And Monitoring System - TNC 2000




The TNC2000 machine protection and condition monitoring system is based on the measurements of shaft axial position in thrust bearing, shaft differential thermal expansion, case absolute thermal expansion; bearing case absolute vibration, shaft relative vibration; valve position and phase angle/rotating speed.

Features :

- A system as whole unit are developed according to standards API670, ISO 10817, ISO2954,ISO7919, ISO10816 and other
- TNC 2000 system is composed of a wide range of different elements
 - Sensors and Transducers
 - Electronic modules – Monitors, Power supply, Local multi-channel display, Data acquisition unit
 - Mechanical casings – 19" rack, 19" cabinet
 - Data acquisition and diagnostics software
- Provides continuous operational supervision of rotating machinery such as turbosets, compressors, blowers, exhaust fans, pumps, gears and others.

Thrust Monitoring

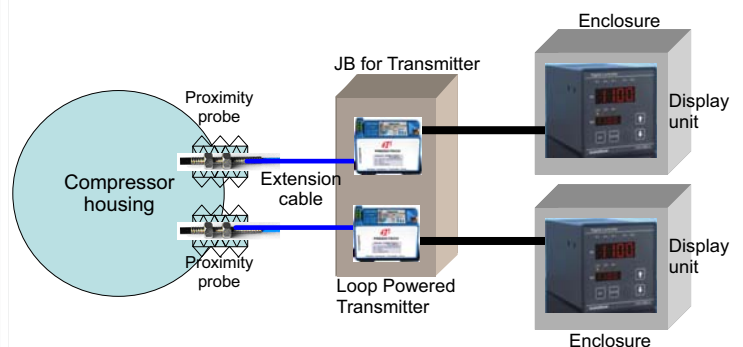

- Thrust Monitoring system is intended for shaft axial (Thrust position) measurement in Turbines, pumps, compressors and other machines
- Thrust Monitoring system monitors machine trends and alarms in case of excessive axial movement to avoid serious problems
- The non-contacting displacement probe transmitter system is a gap to dc current device that measure static distance between the probe tip and the observed target

Online Balancing System, Hofmann

- The active balancing system automatically compensates unbalance during the operation of a machine.
- Time savings through fast electromagnetic drive and adaptive balancing methods
- Balancing during machine operation
- Increased product quality and machine availability
- Suitable for very high speeds
- Permanent unbalance monitoring
- Unbalance correction within short time
- Neutral position for manual prebalancing
- Windows operating and visualization software
- Field balancing software
- Compensation of operational unbalances
- Balancing of rotors, grinding wheels, grinding spindles

Process industry

- Fans, Compressors - correction of unbalance due to trash buildup, dirt accumulation.
- Paper rolls - Compensation of unbalance due to thermal distortion, condensate build-up
- Pumps - compensation of hydraulic unbalance



Condition Monitoring Services

Vibration Analysis And Diagnostic Services

MASIBUS provides vibration-based diagnostics services to industries so as to cater to their specific requirements. Experienced personnel and instrumentation are at hand to render Machinery Vibration Monitoring & Analysis Services.

- Vibration monitoring provides predictive maintenance of the rotating machines in industries
- Minimize the failure of machines before time and thus prevents the costly failures
- Dynamic balancing- Single/Dual plane
- Analysis and Identification of Fault/ Root Cause
- Value added services at affordable rates

Thermography Services

Infrared Thermography is used to detect hotspots, hidden problems; excess heat so that problems can be found and maintenance personnel can take appropriate action to correct the problem avoiding electrical failures thus increases the safety. Masibus' provides Thermography services to carry out the survey of electrical installation (MCC & PCC panel, switchgears, Motor junction box terminal, switchyards etc) and mechanical equipment (compressor, pipe leakage, refractories etc). IR thermography provides a quick and safe way of detecting problems in many different situations

Vibration Certification Exam

Masibus is the accredited representative of The Vibration Institute in India. The Vibration Institute's Certification Program follows the International Standards Organization standard, ISO 18436, Condition Monitoring and Diagnostics of Machines The Vibration Institute's Certification Program for Vibration Analyst was developed by and is governed by a committee representing various industries and is used worldwide. Category I vibration analysts are capable of performing simple machinery vibration measurements involving single-channel condition monitoring and diagnosis. Experienced analysts may go directly to the examination for Category II.

Vibration Calibration Services For Sensors / Analyzer

Masibus provides calibration services for the vibration sensors (viz. Accelerometer, velocity and displacement) and vibration analyzers. Using the back to back calibration by substitution, reference transducers are calibrated by primary reference transducer, as per ISO 16063-11:1999.

- Sensitivity calibration
- Provide reliable information
- Traceability with NIST
- Increases confidence in measurement
- Easy access to our facility
- Option of onsite service

National Offices

Bengaluru
Cell: +91 9844023160
E-mail: blr@masibus.com

Chennai
Cell: +91 9840483388
E-mail: chennai@masibus.com

Goa
Cell: +91 9822135796
E-mail: goa@masibus.com

Kolkata
Cell: +91 9433073470
E-mail: kolkata@masibus.com

Lucknow
Cell: +91 8005422558
E-mail: laucknow@masibus.com

Vadodara
Cell: +91 9662042824
E-mail: baroda@masibus.com

Pune
Cell: +91 9689937234
E-mail: pune@masibus.com

Mumbai
Cell: +91 9892263577
E-mail: mumbai@masibus.com

Hyderabad
Cell: +91 9441400344
E-mail: hyd@masibus.com

Surat
Cell: +91 9898587968
E-mail: surat@masibus.com

International Office

Sharjah
Cell: +971 65574650
E-mail: sharjah@masibus.com

masibus[®]
Advanced Automation - Sure Solutions

MASIBUS AUTOMATION AND INSTRUMENTATION PVT. LTD.

B-30, G.I.D.C. Electronics Estate, Sector-25
Gandhinagar - 382044, Gujarat, INDIA
Tel.: +91 79 23287275 - 79
Fax: +91 79 23287281 - 82
E-mail: sales@masibus.com
Web: www.masibus.com

For Sales & Service, Call TOLL FREE (India only)

1-800-233-2273