RC2100



Features:

- Measures upto 9999 RPM
- Inbuilt Senor Supply

Size: 72mm X 72mm

Technical Specifications

Input Specifications

Sensor Type	PNP / NPN* (*For NPN configuration please contact factory)
Input Type	Voltage pulse (3 to 30V DC) from
	Proximity switches, Encoders,
	Solid state devices, Potential free contact
Input Speed	4 to 9999 pulses/min
Accuracy	Rate: 0.05%

Output Specifications

Sensor Supply	Inbuilt, 12 VDC, ±10%, 30 mA
---------------	------------------------------

Functional Specifications

Range	4.00 to 9999 RPM
Counting Direction	Unidirectional (Up)


Supply Voltage

Supply Voltage	85 to 270 VAC/DC (AC : 50 or 60 Hz)
συρρίγ νοιίας	03 10 27 0 1/0/ 00 (A0 . 30 01 00 112)

Environmental Specifications


Temperature	Operating: 0 to 50°C Storage: -5 to 50°C
Humidity (non-condensing)	95% RH
Weight	170 gms

Dimensions

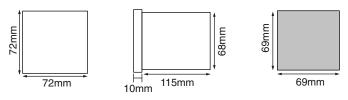

Rate Indicator

Terminal Connections

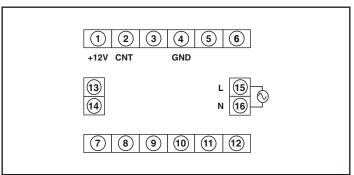

Ordering Information

Part No.	Supply Voltage
RC2100	85 to 270 V AC/DC